

Empirical networks for localized COVID-19 interventions using WiFi infrastructure at university campuses

Vedant Das Swain* Jiajia Xie*,[†] Maanit Madan*
Sonia Sargolzaei* James Cai[‡] Munmun De Choudhury*
Gregory D. Abowd*,[◇] Lauren N. Steimle[†] B. Aditya Prakash*,¹

*College of Computing, Georgia Institute of Technology

[†]H. Milton Stewart School of Industrial and Systems Engineering, Georgia Institute of Technology

[‡]Department of Computer Science, Brown University

[◇]College of Engineering, Northeastern University

December 23, 2021

Abstract

1 Infectious diseases, like COVID-19, pose serious challenges to university campuses, which typically
2 adopt closure as a non-pharmaceutical intervention to control spread and ensure a gradual return
3 to normalcy. Intervention policies, such as remote instruction (RI) where large classes are offered
4 online, reduce potential contact but also have broad side-effects on campus by hampering the local
5 economy, students' learning outcomes, and community wellbeing. In this paper, we demonstrate
6 that university policymakers can mitigate these tradeoffs by leveraging anonymized data from their
7 WiFi infrastructure to learn community mobility — a methodology we refer to as *WiFi mobility*
8 *models* (WIMOB). This approach enables policymakers to explore more granular policies like local-
9 ized closures (LC). WIMOB can construct contact networks that capture behavior in various spaces,
10 highlighting new potential transmission pathways and temporal variation in contact behavior. Ad-
11 ditionally, WIMOB enables us to design LC policies that close super-spreader locations on campus.
12 By simulating disease spread with contact networks from WIMOB, we find that LC maintains the
13 same reduction in cumulative infections as RI while showing greater reduction in peak infections
14 and internal transmission. Moreover, LC reduces campus burden by closing fewer locations, forcing
15 fewer students into completely online schedules, and requiring no additional isolation. WIMOB can
16 empower universities to conceive and assess a variety of closure policies to prevent future outbreaks.
17

18 *Keywords:* COVID-19; mobility; modeling; policy; non-pharmaceutical intervention; passive
19 sensing; WiFi

20 ¹To whom correspondence should be addressed. Email: badityap@cc.gatech.edu

1 Introduction

2 University campuses are often hotspots for infectious disease outbreaks and hence are tar-
3 geted for interventions. In the wake of the Coronavirus Disease (COVID-19) [53], the U.S.
4 witnessed more than half a million cases at universities [66], and colleges are still left with
5 decisions for operations in Fall 2021 [39, 56]. Controlling the disease at universities can be
6 pivotal to securing the surrounding environment [6]. To reduce on-campus infections and the
7 likelihood of superspreading events, a recommended form of non-pharmaceutical intervention
8 (NPI) is partial closure of the campus [22].

9 During COVID-19, advancement in teleconferencing technology equips universities to
10 continue operations by adopting a form of campus closure that relies on remote instruction
11 (RI) [49]. As a consequence, the campus community has fewer opportunities to visit spaces,
12 such as classrooms, to congregate and risk transmission [1, 3]. One common approach cam-
13 puses consider to design RI policies is to use enrollment data (EN) to assume contact and
14 therefore, offer large classes online while other classes remain in person [9, 72]. In fact,
15 during COVID-19, 44% colleges and universities in the U.S., primarily offered instruction
16 online [64]. However, these policies can still have broad, negative, and indiscriminate impact
17 on the community by forcing students into completely remote course schedules. Such policies
18 can have adverse effect on learning outcomes [18], where students can lose close to 7 months
19 of education [2]. Additionally, RI can disincentivize students to stay on campus and thus,
20 universities incur losses in auxiliary revenue (e.g., boarding, parking, dining, etc.) [25, 17],
21 with universities standing to lose up to \$50 million because of unused services [75]. Even
22 the local population unaffiliated with the university takes sustains losses to business due to
23 university closures [32, 71]. Furthermore, with socioeconomic disparities and heterogeneous
24 household contexts, the demands of remote instruction can lead to added anxiety and stress
25 among students [12, 74]. Relying on RI, university campuses struggle to balance community
26 health with the demands of learning, economy, and broad wellbeing [58]. Instead, there is
27 a need for a more versatile approach to design closure policies that empowers policymakers
28 to accurately assess impact of closure interventions and model more data-driven targeted
29 intervention strategies.

30 This paper showcases a new approach that universities can take to design closure poli-
31 cies by leveraging data from their existing WiFi infrastructure. Our methodology, *WiFi*
32 *mobility models* (WIMOB), involves constructing anonymized mobility networks of cam-
33 pus (Figure 1a), which helps determine extended periods of collocation — or “proximate
34 contact” [30]— between individuals to describe contact networks on campus. Particularly,
35 WIMOB enables a more expressive toolkit for university policymakers that represents contact
36 longitudinally and allows them to assess closure at the granularity of a room, suite, or hall.
37 Thus, it lends itself to the design of targeted interventions that focus on localized closures
38 (LC). We demonstrate the utility of WIMOB with data collected over two years, of approx-
39 imately 40,000 anonymous occupants and visitors of the Georgia Institute of Technology
40 (GT), a large urban campus in the U.S. — including about 16,000 undergraduate students,
41 9,000 graduate students, and 7,600 staff members. In general, on comparing WIMOB to EN
42 as an approach to model contact, we find that WIMOB captures contact behavior at a com-
43 munity scale for a variety of campus spaces, describes temporal variations in contact, and
44 provides a better estimate of local context by being aware of occupancy and the non-student

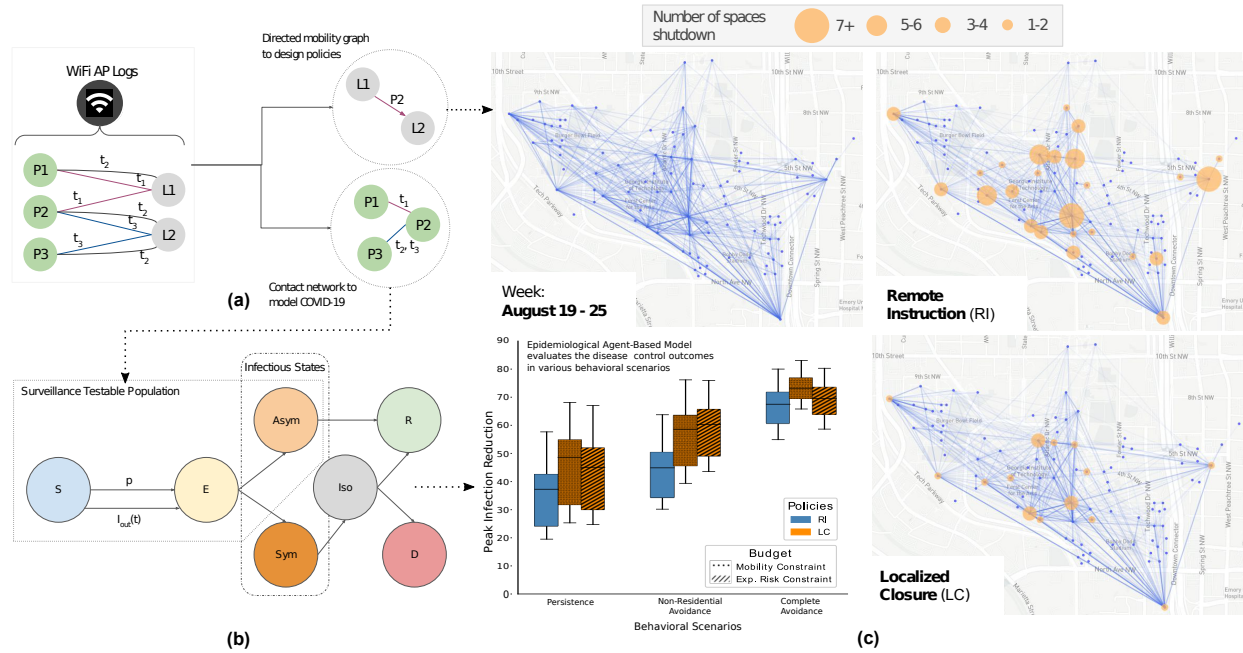


Figure 1: The WiFi mobility models (WIMOB) methodology uses anonymized network logs to model campus mobility and target spaces for localized closures (LC) (a) WiFi network logs reflect timestamps when people’s devices associate with access points (APs) on campus. WIMOB mines these logs to characterize mobility as a bipartite graph that describes people (e.g., P_1 , P_2) visiting campus locations (e.g., L_1 , L_2) during different times (e.g., t_1 , t_2). Since people’s devices can proxy their presence, we estimate collocation (e.g., P_1 and P_2 were collocated at L_1 at t_1), and movement (P_2 dwelled at L_1 and then at L_2). (b) We use the collocation network to construct a SEIR-based epidemiological ABM, calibrated to Fall 2020 incidence of COVID-19 (c) WIMOB highlights mobility behavior to evaluate and inform policy. (c)–top-left: Mobility on campus between the top 100 most frequented locations on the GT campus in the Fall semester of 2019. Edges only connect points of significant dwelling and thus do not represent pedestrian routes. (c)–top-right: RI is a form of broad closure which affects a large number of students and locations. (c)–bottom-right: By contrast, we propose to use WIMOB to parsimoniously identify a small set of spreader locations within buildings and design LC policies. (c)–bottom-left: We use our epidemiological ABM to evaluate these policies under different budgetary constraints and various behavioral scenarios (Persistence, Non-Residential Avoidance, Complete Avoidance). Our study shows that LC policies provide equal or better control on the disease spread, and yet minimize the burden on campus compared to RI.

1 population. Using WIMOB also reveals that EN overestimates the impact of RI on reducing
 2 contact on campus. Hence, we propose a less burdensome alternative to RI, by deriving
 3 more targeted LC policies based on WIMOB (Figure 1) (indeed EN is too coarse-grained for
 4 designing targeted LC policies).

5 We further exhibit that LC presents better disease control outcomes than RI by con-
 6 structing and simulating an agent-based epidemiological model (ABM) over the people-
 7 people contact networks (Figure 1b) derived from the collocation identified with WIMOB
 8 (Figure 1a). Our ABM was calibrated with GT on-campus COVID-19 cases from the Fall
 9 semester of 2020 [28] and infection rates from Fulton County [51]. To compare the effect of
 10 interventions, we construct a counterfactual semester — that is unaltered by other policy-
 11 induced behaviors of 2020 — by leveraging WiFi data from Fall 2019 to determine the
 12 contact structure of the simulation. We assess the effectiveness of closure NPIs (Figure 1c)

1 by simulating COVID-19 under various behavioral scenarios. We find LC is comparable to RI
2 in controlling total infections but more effective at reducing the peak infections and internal
3 transmission. Additionally, LC targets fewer locations, forces fewer students into fully online
4 schedules, and does not isolate any more people than RI – illustrating that WIMOB can help
5 universities devise highly-specific closure policies, like LC, which can contain disease spread
6 and mitigate campus disruption in comparison to RI policies.

7 Our methodology also promises other advantages. Mobility generally has been used to
8 dynamically model disease spread of influenza [59], rubella [73] and COVID-19 [3, 57] showing
9 the effectiveness of mobility restrictions at a regional-, or city-level [79, 11, 7, 45, 34]. These
10 studies typically rely on cell tower localization or aggregating GPS information from mobile
11 phones [10]. Neither of these data sources is easy to access for university campuses. At the
12 same time, studies to infer campus mobility networks have relied on accessing user devices
13 with specialized data logging applications (e.g., contact tracing mobile apps) [13, 19, 61, 31],
14 but these approaches are typically constrained for disease modeling because they require
15 mass adoption to represent the entire community and continuous maintenance of software is
16 needed to capture longitudinal behavior changes. In contrast, our work repurposes already
17 existing managed WiFi networks to model mobility, which provides room level granularity
18 for mobility [20, 70, 15, 67] and consequently indicates proximate contact [30]. Much like EN,
19 universities internally archive such data over a long term for other purposes and do not need
20 to install any additional surveillance infrastructure to access it. Prior work has repurposed
21 such data for campuses of size 10,000 – 50,000 in different locations including Singapore, the
22 U.K., and the U.S [20, 76]. With the appropriate privacy considerations, a university can
23 obtain such data at a low cost, continuously and unobtrusively. The possibility of pandemic
24 still looms large in the future [37, 26]. As campuses prepare for the upcoming Fall semester
25 and unforeseen contagious diseases of tomorrow, WIMOB presents an attractive and practical
26 method to inform better public health policies.

27 Results

28 We present two sets of analyses in our work. The first set contrasts structural characteristics
29 of contact networks described by WIMOB with current practices that use enrollment data
30 (EN). In the next set, we used WIMOB to build an epidemiological model (an agent-based
31 model over the contact networks, referred to as ABM) and analyze the remote instruction
32 (RI) and localized closure (LC) interventions in terms of their differences in dynamic disease-
33 control outcomes and burdens to campus.

34 Note, throughout the paper we use the small-caps to denote different methodologies to
35 model contact (WIMOB and EN) and sans-serif to denote different intervention strategies
36 (RI and LC).

37 **WIMOB provides local, holistic and dynamic structural insights for** 38 **contact networks on campus**

39 Studies on RI policies tend to assume that contact in universities is largely informed by EN—
40 transcripts showing which courses a student is registered for. EN can provide structural

It is made available under a [CC-BY 4.0 International license](https://creativecommons.org/licenses/by/4.0/).

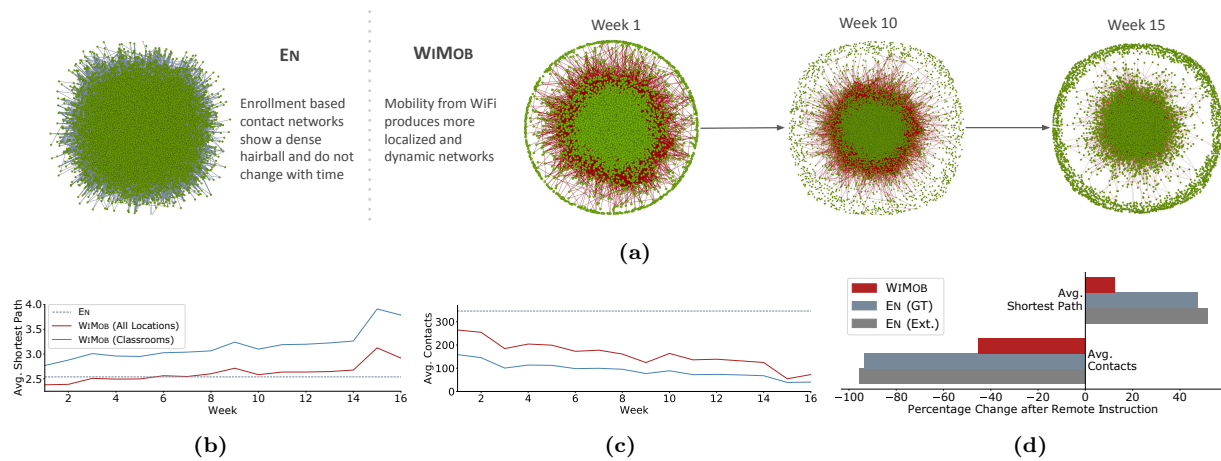


Figure 2: Results show difference in structural characteristics of contact networks from EN (course enrollment) and WIMOB (campus mobility). (a) In general, EN overestimates connections (grey edges) between students (green nodes) and does not anticipate changes through the semester. EN assumes 90% of students to be connected in a single component, but WIMOB reveals (red edges) that on any given week only 69% are in the largest component (those not on campus are isolated and shown in the circumference). Moreover, WIMOB reveals that density of connections changes over the semester. (b) EN depicts campus contacts to be connected closely into a “small world”. WIMOB shows that contacts evolve over time. As mobility captures interactions outside classrooms we observe that for the first 6 weeks the shortest transmission path between people is shorter than what is reported by EN. (c) Enrolling into a course does not necessitate physically collocating with the class for extended periods (students can also choose to be entirely absent). WIMOB reflects this behavior and highlights a decline in average contacts over time. (d) These structural differences can help policymakers anticipate the effect of closure policies by describing how it fragments the underlying contact network. EN shows that remote instruction leads to a 94% reduction in contacts and 50% increase in transmission path length (similar to numbers reported in prior work [72], shown as EN (Ext.)). However, the estimate is significantly lower when measured using WIMOB. As a result, WIMOB emphasizes the limits of remote instruction policies and in turn motivates new policies that can be designed and evaluated with actual on-campus behavior.

1 insights on density of connections and disease transmission paths to inform modeling disease
 2 simulations [29]. However, such static data can overestimate attendance and ignore overlap
 3 between courses (via instructors) and organic interactions outside classes (e.g., waiting areas,
 4 dining, parties, and extra-curricular activities). Therefore, using EN can overemphasize
 5 the disease-mitigating structural changes to the network by RI interventions. By contrast,
 6 WIMOB is more grounded in community behavior as it captures multiple scheduled and
 7 serendipitous contact situations dynamically over the semester. We compared the features
 8 of contact networks constructed with WIMOB, against networks constructed with EN using
 9 data from GT for Fall semester of 2019 (August 19 – December 14), prior to any COVID-19
 10 reported cases in the U.S. EN approximates contact based on students enrolling for classes
 11 that could potentially collocate them in the same room during lectures. WIMOB infers
 12 contact when any two individuals actually collocate near the same WiFi access point [15, 67]
 13 for extended period (see explanation in [SI WiFi Mobility](#)). We found that WIMOB rendered
 14 new insight into contact on campus that was invisible to the EN methodology.

1 **WIMOB characterizes temporal variation in proximity**

2 Variation in contact over the semester would naturally impact the severity of disease spread.
3 However, EN describes a static network that does not capture such dynamics (Figure 2a).
4 Instead, we found that WIMOB shows contacts got sparser over the semester. Figure 2c
5 presents a notable decline in contacts after the first two weeks, which coincides with multiple
6 orientation seminars and the so-called “course shopping” period of Fall 2019. In fact, contact
7 decreased considerably in classrooms, with a steeper slope possibly because of reduction in
8 attendance. WIMOB was able to reveal other observable changes, such as drop in contacts
9 during exam period (week 15) and increase after fall recess (week 10). EN rendered a highly
10 connected static network, which can miscalculate the speed at which a disease spreads. By
11 contrast, the longitudinal behavior represented by WIMOB can help universities anticipate
12 disease spread more accurately.

13 **EN overestimates contact-based risk**

14 Campuses can assess risk of an outbreak by characterizing the number of individuals that
15 would be at risk of infection through contact. In our study, EN indicated 99% of the indi-
16 viduals on campus were clustered in a single component — if any of them would have been
17 infected in Fall 2019, the entire component would be at risk. From the lens of EN a virus
18 can exhaust an entire population with infection very early. However, WIMOB showed that
19 only 69% of the population was connected in a single component (Table S2). This difference
20 is because WIMOB can distinguish how many individuals are active on campus. Therefore,
21 WIMOB provides a pragmatic estimate of risk by grounding it in local occupancy and helps
22 campuses budget for resources better.

23 **WIMOB reveals different paths for disease transmission**

24 Reports suggest that a key contributor to cases in the pandemic is actually clustering of
25 individuals in non-academic spaces [49]. However, EN does not depict a holistic view of
26 campus contact. It is limited to classrooms and, therefore, fixates on contacts in lectures,
27 while ignoring other spaces. In fact, WIMOB showed that in the first 6 weeks of Fall 2019,
28 the shortest path among individuals was smaller than that approximated by EN (Figure 2b).
29 With WIMOB, we observed new paths in the contact network from situations outside classes.
30 On a given week, WIMOB showed the average shortest path with contact is $3.26(\pm 0.5)$ when
31 only considering lectures, whereas capturing all contexts reduced the average shortest path to
32 $2.67(\pm 0.28)$. Characterizing shorter pathways is crucial for policymakers as closure policies
33 by design aim to disconnect these pathways.

34 **EN overemphasizes the impact of remote instruction**

35 Prior work uses EN to posit that RI reduces contact and in turn significantly fragments
36 the network for disease spread in universities [72, 9]. To compare policy effectiveness with
37 WIMOB, we operationalize RI in our study:

38 **Remote Instruction (RI):** The status quo for data-driven policies offers strictly online in-
39 struction for large class enrollment, while continuing the other classes in person. When

1 using EN to model contacts, we implemented RI by removing connections between stu-
2 dents who were only in contact through courses of size ≥ 30 . When using WiMOB to
3 model contacts, we removed connections between students if they were only connected
4 because of collocations during scheduled lectures of such courses.

5 We evaluated the effectiveness of such a policy if it were applied in Fall 2019, with both
6 WiMOB and EN. **Figure 2d** shows that RI with EN reduced contact by 94% and increases
7 shortest path by 50%. However, the same intervention with WiMOB showed a relatively
8 milder impact (contact reduction 45%; shortest path increase 11%). This reinforces that
9 contact outside courses are significant and remain unaffected by enrollment-oriented policies
10 like RI. WiMOB provides a more encompassing view of the structural effects to a network
11 and motivates design of more impactful closure policies.

12 **Epidemiological model built with WiMOB shows that LC yields bet-** 13 **ter infection reduction outcomes with lower burden**

14 As outlined above, EN does not comprehensively capture the contact on campus. By contrast,
15 contact networks built with WiMOB demonstrate new structural insights, which are critical
16 to describe disease spread. A campus is composed of many different spaces, and EN does not
17 have the flexibility to design closure of such spaces or assess its impact. These drawbacks
18 naturally motivate a new approach to design interventions. Since WiMOB mitigates the
19 limitations of EN, we leveraged it to demonstrate the effectiveness of localized closure (LC)
20 policies.

21 We used WiMOB to define the contact structure of each day and simulate COVID-19 with
22 an agent-based model. Our ABM was overlaid by a modified SEIR compartmental model
23 for COVID-19 for each agent. GT also had implemented a robust surveillance program on
24 campus. Hence we calibrated the ABM on the positivity rate for COVID-19 for GT [28] in
25 the first 5 weeks of Fall 2020 also incorporating external seeding from the surrounding Fulton
26 County, GA [51]. We validated our model by predicting future trends for the rest of Fall
27 2020. For robustness, we performed additional calibrations by varying time windows and
28 university context (details in **SI Sensitivity Analyses**). We studied interventions by applying
29 the ABM over the contact networks produced by WiMOB with data from Fall 2019 — a
30 counterfactual to Fall 2020 if no closure had occurred (see **SI Simulation Model** for further
31 details).

32 **WiMOB can model RI and LC interventions with various configurations**

33 Prior works show a few locations are responsible for majority spread [11] and restricting
34 movement between them leads to greater control [38]. In addition to RI, we modeled LC,
35 which we formalize as follows:

36 **Localized Closure (LC):** We identified rooms-level spaces that are highly central location
37 nodes in the network. We removed contacts between people who are only connected
38 because of collocating at these locations. While, we employed various centrality al-
39 gorithms to identify such locations, for the results discussed in this section we use
40 *PageRank* [54]). Details in **SI Identifying Locations for Closure**.

It is made available under a [CC-BY 4.0 International license](https://creativecommons.org/licenses/by/4.0/).

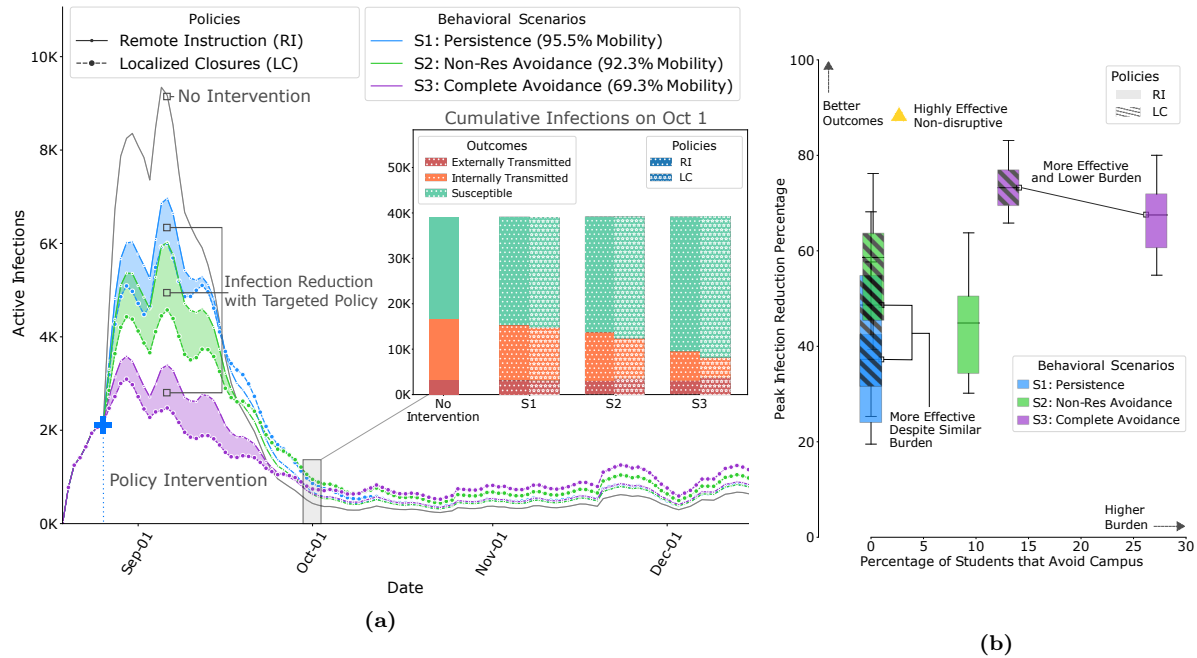


Figure 3: Results of policy interventions with our calibrated ABM on contact networks from Fall 2019, derived from WIMOB (a) This graph compares the mean active infections between LC and RI. LC show improved outcomes (shaded regions) even when constrained to the same restrictions of RI policies. (a)–inset: After the first wave, even though LC shows slightly higher active infections, the cumulative infections are still lower, especially those that are a result of internal transmission on campus. Figure S11— Figure S18 show changes in cumulative infections under different policies, including 2.5th and 97.5th percentile intervals. (b) Outcomes of policies within the same behavioral scenario are shown with boxes of the same color (RI policies are solid, LC policies are hatched) and box heights represent the 2.5th and 97.5th percentile. In S1, even though LC and RI are equally burdensome in terms of students avoiding campus, LC shows improved outcome on peak reductions. In fact, for the other scenarios, LC shows better outcomes than RI, without forcing as many students into online schedules, and, therefore, being even less burdensome with greater impact. Figure S7— Figure S10 show comparison of all policy outcomes with different budgets.

1 We found that, if COVID-19 spread through Fall 2019 (a regular semester), the cases rose
 2 after 7 days (Figure 3a). Therefore, we applied both RI and LC interventions after the first
 3 week.

4 To make the comparisons between the closure policies, we established fixed budgets to
 5 design LC based on the resource utilization on RI. We considered 2 kinds of budgets, (i)
 6 mobility reduction — to depict space use on campus, and (ii) risk of exposure — to reflect
 7 testing capacity. Also note, response to closure policies can lead to unpredictable side-effects
 8 in campus behavior, particularly when a student’s schedule is entirely online. Therefore, we
 9 design policies within three behavioral scenarios (each with a varying budget):

10 **S1: Persistence:** Irrespective of the locations closed or classes restricted, individuals con-
 11 tinue their other visiting behaviors.

12 **S2: Non-Residential Avoidance:** Non-residential students stop all visits to campus if
 13 they enrolled in at least 3 courses and the policy forces their entire academic schedule
 14 online.

1 **S3: Complete Avoidance:** Same as S2, but even residential students avoid campus based
2 on their schedule.

3 Similar to other works that model closure [72, 5], we assume that when a location is
4 shutdown, the individuals who ought to have visited that location isolated during the time.

5 To devise interventions, WIMOB estimated how RI uses the budget and then designed LC
6 to match this budget under every behavioral scenario Table 1 describes how the budget for
7 each policy varies. Additional details are present in SI Modeling Policy and Scenarios.

8 We present differences between LC and RI based on three infection reduction outcomes;
9 peak infections (maximum active cases on a given day), internal transmission (exposure
10 from infected individuals on campus), and total infections (cumulative cases at the end of
11 the semester). Additionally, we measured the burden of policy interventions with the number
12 of locations closed — requires resources to monitor and maintain super-spreader locations,
13 the percentage of students that avoid campus — disruption to learning outcomes [18, 12],
14 and the percentage of individuals completely isolated — worsens mental wellbeing [60].

15 **LC cause greater reduction in peak infections, while affecting fewer locations**

16 Controlling peak infections relaxes the burden on a university to support positive cases for
17 any given day, and allows resources to be distributed over time. In all behavioral scenarios
18 of our simulation of Fall 2019, we observed that the peak reduction was significantly better
19 in LC (Figure 3) than RI. While RI impacted 58 different locations (classrooms and lecture
20 halls), in S1 and S2, LC achieved better outcomes by closing fewer locations. For example,
21 in S2, RI achieved a 28.9% peak reduction, but LC showed reductions of 49.3% (mobility
22 budget) and 48.1% (exposure risk budget). This was attained by closing 38 or 50 locations
23 respectively. Therefore, with such policies, policymakers need to restrict fewer locations to
24 remarkably minimize the pressure of active infections on campus (e.g., diagnoses, treatment,
25 quarantining).

26 **LC lead to comparable reduction in total infections, while keeping more students 27 on campus**

28 Universities want to minimize the number of infected cases while ensuring majority of the
29 population remains active on campus to continue successful operation. In Scenario S1, the
30 total number of infections reduced by both LC was more than the reduction shown by RI.
31 were similar. For other behavioral scenarios the total infection reduction between policies
32 was similar ((Table S2). In contrast, the impact the policies had on the student schedules
33 was remarkably different. RI forced multiple students to adapt to fully online schedules. In
34 Scenario S2, 9% of students did not visit campus and in S3, 27% of students did not visit
35 campus. On the other hand, in LC, the number of students expected to avoid campus could
36 be as low as 0 and never exceeded 12%. Besides sustaining economic loss to the campus,
37 remote instruction can increase anxiety among students and hinder learning outcomes [12,
38 74]. Compared to RI, LC offers policymakers a way to defend against turnover in the student
39 population, without compromising overall control of disease spread (Table 1). Limiting the
40 number of students that avoid campus helps preserve on-campus businesses [32, 71] and
41 minimally disrupts the student wellbeing.

Table 1: Comparison of policies in terms of controlling the disease and impacts on campus in Fall 2019.

Behavioral Scenario	S1: Persistence			S2: Non-Res Avoidance			S3: Complete Avoidance		
Policy	RI	LC		RI	LC		RI	LC	
Budget	-	Mobility (95.5%)	Exposure Risk (18800)	-	Mobility (92.3%)	Exposure Risk (16900)	-	Mobility (69.2%)	Exposure Risk (12700)
Infection Reduction Outcomes									
Peak Infections (%)	25.34(±12)	36.92(±14)**	34.30(±13)**	35.44(±10)	49.33(±11)**	52.19(±10)**	61.62(±7)	69.34(±5)**	64.44(±6)**
Total Infections (%)	6.99(±5)	10.63(±6)**	8.19(±5)**	14.88(±4)	13.96(±6)*	15.67(±6)	33.00(±5)	33.4(±5)	26.94(±5)**
Internal Transmissions (%)	17.13(±9)	22.62(±11)**	21.01(±11)**	27.58(±8)	35.35(±12)**	39.20(±11)**	54.00(±8)	70.89(±7)**	60.90(±9)**
Burdens on Campus									
Locations Affected	58	18	19	58	38	50	58	192	124
Students Avoiding (%)	0	0	0	9.30	0.20	0.45	27.21	12.45	6.57
Completely Isolated on Campus (%)	5.42	8.40	8.40	5.95	5.72	5.71	7.09	5.18	5.23

Within each behavioral scenario, we performed the Kruskal-Wallis H-Test [40] to compare outcomes of LC with RI. We found that LC leads to significantly improved peak infection reduction and internal transmission. In terms of reduction in total infections, the outcomes were comparable in general but varied by specific scenarios. In addition, every policy also exerted some burden on campus, either in terms of locations affected, students avoiding campus or isolation. We observed that LC policies focus on fewer locations (except in S3). Moreover, these policies affected fewer student’s schedules and therefore fewer people avoid campus due to completely remote schedules. Finally, LC does not increase the percentage of people completely isolated on campus (p -value: < 0.01 *, < 0.001 **).

1 **LC cause greater reduction in internal transmission without causing further iso-**
 2 **lation on campus**

3 Universities are responsible for limiting spread on campus, but they must also ensure that
 4 aggressive policies do not worsen mental wellbeing of the community. In terms of inter-
 5 nal transmission the reduction is significantly larger with LC (Table 1). However, when LC
 6 restricted the infections early in Fall 2019, it left more individuals susceptible to external
 7 transmission. College student behavior outside campus on weekends and breaks is known to
 8 impact local transmission [16]. When policymakers consider LC they should also consider
 9 policies on re-entry or required testing based on off-campus activities. In terms of isolating
 10 individuals on campus, it’s notable that LC and RI were similar in S2. Interestingly, in S3,
 11 where LC closed more than 100 locations, the percentage of isolated individuals per week was
 12 less than that of RI. This finding implies that LC can keep individuals on campus without
 13 forcing them into complete isolation. Here “isolation” refers to no form of proximate con-
 14 tact with any individual on campus — extreme social distancing where individuals are not
 15 even collocated in the same suite or hall. While social distancing is a recommended coun-
 16 termeasure for COVID-19 [1], complete isolation can have adverse effects on psychological
 17 wellbeing [60, 41, 55]. LC can help alleviate concerns of closure interventions that increase
 18 loneliness and limit social connectedness [41].

19 **LC identifies a wider variety of auxiliary spaces.**

20 By using WIMOB to design LC we were able to identify locations for closure at the granularity
 21 level of rooms, including unbound spaces such as lobbies and work areas. As policy design
 22 budgets changed with every behavioral scenario we found that LC identified different types

1 of locations for closure. First, in *S1*, we found that most locations that LC targeted are
2 a subset of the auditoriums–like rooms where large classes would take place in Fall 2019.
3 Note, LC needs to restrict only a few such spaces to utilize the same budget as RI. This is
4 because, under *S1*, RI policies only altered visits to lectures, while these spaces are used for
5 other purposes during other times (e.g., club activities and seminars). We also noted that
6 LC targeted ‘high traffic’ locations like conference center lobbies which are typically used
7 as waiting areas or for networking events. Next, in Scenario *S2*, we saw that in addition
8 to spaces mentioned earlier, interestingly LC further restricted the use of smaller rooms
9 (occupancy 13 – 35) which would not be affected by RI (as only classes of size ≥ 30 are
10 offered online). LC also targeted areas in the recreation center (which includes locker rooms
11 and indoor courts for 4 – 20 people). This insight indicates that our methodology WIMOB
12 accounts for a diverse set of student activities. Moreover, we also found a selection of spaces
13 that would not be frequented by the undergraduate population, such as lab areas and facility
14 buildings like the police station. Lastly, in Scenario *S3*, LC targeted closure of activity in
15 far more spaces than RI. However, the better outcomes can be attributed to the fact that
16 LC diversified the potential restriction areas. LC restricted heavily used small study rooms
17 or breakout rooms (for 1 – 6 people). Furthermore, it restricts use of spaces where multiple
18 small groups of people can organically assemble, such as cafes, dining halls, and reading
19 areas. We also observed that LC restricted activity in about 10 Greek Houses but does not
20 target other housing areas — demonstrating its ability to restrict social behavior that could
21 amplify disease spread. [Figure S19](#) shows the diversity in locations for various LC policies.

22 Sensitivity and robustness analyses

23 The results above use an ABM calibrated on the positivity rate of the first 5 weeks of Fall
24 2020. This rate can be influenced by many latent factors (e.g., mask-wearing, hand washing,
25 distancing, and compliance). To study any effect of these variations, we also calibrated on
26 different time windows throughout the semester. We calibrate on weeks 5 – 9 and 10 – 14
27 in Fall 2020, and validate on the remaining semester. In both cases, compared to RI, we
28 found that LC still exhibits better reduction in peak infections (up to 90%) and internal
29 transmission (up to 77%). In the original calibration, LC maintained the same level of total
30 infections as RI, but with the new periods we found total infections were substantially less
31 than RI ([Table S8](#) and [Table S9](#)). Another important variable for positivity is the wider
32 context of the campus e.g. urban/rural, the surrounding county, city, etc. To investigate
33 this, we also calibrated our ABM on the positivity rate of different universities in the US in
34 Fall 2020 (along with information from their county to seed external cases). Consider this
35 as a hypothetical where the mobility of the GT community remains the same but disease
36 outcomes resemble a different campus. We calibrated on data from University of Illinois
37 at Urbana-Champaign and University of California, Berkeley. We found no remarkable
38 differences from our findings with GT ([Table S10](#) and [Table S11](#)).

1 Discussion

2 Non-pharmaceutical interventions (NPI) are the first line of defense for universities to re-
3 spond to contagious diseases like COVID-19 [21, 47] and are also crucial to control infections
4 and continue operations until recovery. On a campus, a common form of NPI is closure [33].
5 Universities consider enrollment data (EN) to design remote instruction (RI) for closure to
6 support continued operations safely [72]. However, EN can misconstrue contact on campus,
7 and RI policies can have broad impacts despite their effects on curbing the disease spread.
8 This paper demonstrates that repurposing logs from a managed WiFi network (WIMOB)
9 can help design effective localized closure policies (LC). We show that WIMOB uncovers rich
10 contact dynamics and provides policymakers multiple dimensions to design policies like LC.
11 We simulate COVID-19 with an ABM that harnesses WIMOB to compare RI and LC. As
12 universities plan for Fall 2021, our results present evidence that LC designed with WIMOB
13 can lead to improved infection reduction outcomes, while simultaneously relaxing burdens
14 on the campus caused by coarse-grained broad RI policies.

15 **Generalizability for Other Contexts:** In practice LC policies should be deployed in con-
16 junction with the other tools as well like testing, tracing, and quarantining. WIMOB can
17 complement disease-specific knowledge to identify closure spaces. For example, small indoor
18 spaces with poor ventilation increase the risk of infection for COVID-19 [63], while other
19 algorithm-identified locations for closure might not require closure because users of a space
20 are compliant with mask-wearing and testing. Further, as a pandemic progresses and public
21 health guidance develops [62], with WIMOB, campuses can regulate the restriction of LC
22 policies and anticipate the path to ‘normal’ operations [39, 56]. Moreover, WIMOB captures
23 various spillover effects that cannot be captured in methods like EN. For instance, with
24 WIMOB we observe that the mobility in Fall 2020 was 39% of that in Fall 2019 because the
25 on-ground policies lead to certain staff working remotely as well. With additional informa-
26 tion, WIMOB enables policymakers to model such scenarios and design alternatives like LC
27 with new budgets. Policymakers can use WIMOB as a versatile tool to explore dynamic in-
28 tervention strategies as well. Prior work shows that staggering policy restrictions could have
29 variable impact on campus [78]. Accordingly, WIMOB could be used to build an adaptive
30 version of LC that updates at different points in the semester based on expected mobility
31 changes. Additionally, depending on campus priorities and resource limitations, different
32 campuses can use this same data to model policies differently. The effectiveness of reopening
33 policies is expected to be sensitive to a campus’ specific context that includes physical infras-
34 tructure, overarching guidelines, and human compliance [6]. For certain campuses policies
35 might not need to be constrained by exposure risk as testing might be frequent, ubiquitous,
36 and voluminous. Other campuses could have limits on quarantining capacity. Policymakers
37 might even consider the cost trade-offs by actually forecasting actual financial losses incurred
38 by reduction in mobility [7], or value loss of services based on community needs [65]. We
39 elaborate on these considerations in the **SI Implications for Policy Design**.

40 **Operational Considerations:** Beyond assessing cost-benefits, universities need to de-
41 vise practical methods of obtaining, storing, and processing mobility of the community as
42 WIMOB. University can access logs from the managed network internally as it is passively
43 collected. Moreover, it does not require any new form of surveillance sensing but universities
44 must revise terms of use and stay sensitive to community perspectives. Despite population

1 mobility being valuable for many applications [77], accumulating localization data can be a
2 major privacy concern [69]. Instead, operational applications need to conceive approaches
3 that only retain insights on locations to shutdown but not individual data. Similarly, any
4 operational use needs to employ differential privacy to limit what stakeholders can learn from
5 the data [4] (e.g., decision-makers can only get a list of candidate locations to close). In the **SI**
6 **Discussion**, we further detail approaches to reconcile privacy, ethics and legal considerations.
7 **Limitations and Future Work:** For future investigations of better closure policies, re-
8 searchers and policymakers need to be cognizant of the limitations of our work. Our analyses
9 capture heterogeneity in individual behavior but does not account for differences in intrinsic
10 vulnerabilities, which are related to severity of risk [35, 55, 23] and disparity in burden of
11 shutdowns on demographic groups [11]. WIMOB can be extended with other streams of data
12 to characterize sub-contexts in the population and devise new forms of LC to explicitly study
13 the impact of policies on specific vulnerable subgroups in the community. Additionally, our
14 work explores the avoidance based behavioral responses to closure interventions with as-
15 sumptions in line with prior work [72, 5]. Researchers and policymakers can be interested
16 in substitution behaviors where the population visits new locations when others are closed.
17 WIMOB has the flexibility to model more nuanced spillover effects. Exploring different ways
18 to remove and reallocate edges in the contact network is interesting future work. Further
19 discussion in **SI Limitations and Future Work**.

20 Methods

21 This section summarizes (i) the data used to derive contact networks and policies, and (ii)
22 the dynamics of our simulation and calibration approach. Additional information for every
23 subsection is present in **SI Methods**.

25 WiFi Mobility

26 Here we describe the data for our methodology, WiFi mobility models (WIMOB) and the
27 process to yield Localized (LC) policies.

28 Data Use and Access

29 The IT management facility at Georgia Tech (GT) accumulates WiFi access point logs over
30 time. This is common in most universities with managed WiFi infrastructure. We actively
31 collaborated with IT management to define safety and security safeguards that allow us to
32 obtain a de-identified version of these raw logs. Before accessing the data we established a
33 data-use agreement and an ethics protocol that was approved by the Institutional Review
34 Board (IRB) at Georgia Institute of Technology (Protocol H20208). For the WiFi data,
35 we were provided access to logs from Fall 2019 and Fall 2020. We processed these logs to
36 characterize mobility (WIMOB) and it encompasses all 40,000 unique visitors that connected
37 to the network via 6,959 different access points [15]. The logs did not contain any personally

1 identifiable information and locations are also coded. The logs indicated the WiFi access
2 point (AP) a device associates with and can therefore be used to infer dwelling locations
3 of users across the entire campus. This is limited to indoor spaces where APs are located
4 and the scope of this localization is at the granularity of a room or suite [20, 76]). For EN
5 we only used aggregate insights for enrollment, which were derived from course registration
6 transcripts. Note, we did not cross-identify any students. We used publicly accessible course
7 schedules to approximate schedules of de-identified nodes and infer if they were students or
8 staff, and non-residential or residential. We elaborate on our data in [SI Data](#).

9 **Note.** Like most universities, GT’s managed WiFi network is not equipped with any
10 Real-Time Location System (RTLS) [14, 46]. RTLS systems use Received Signal Strength
11 Indicator (RSSI) values from multiple neighboring APs to provide high precise localization of
12 individuals in terms of time and space. However, deploying such systems requires surveying
13 the entire network. Additionally, precision localization raises more privacy concerns. These
14 factors together make it challenging for universities to justify the deployment of RTLS, unlike
15 small retail settings that can monetize RTLS insights directly (e.g., insights on footfall can
16 be tied to improving revenue).

17 Contact and Movement Networks

18 WIMOB leverages the logs to create bipartite graphs K_t , for each day t , which connect P
19 users to L access point locations ([Figure 1a](#)). Any edge, $\{p, l\}_i$ indicates the i^{th} instance
20 when a p was dwelling at l . These edges describe the time period of dwelling. Subsequently,
21 by comparing all edges in K_t we can infer if different individuals are collocated near an AP
22 to create a contact network, G_t , for each day t — between any collocated $p_i, p_j \in P$. These
23 networks define the contact structure for an epidemiological agent-based model at every time-
24 step. Similarly, by inspecting the sequence of dwelling locations for any p in graph K , we
25 compute a mobility network, H_t — between locations $l \in L$. In our approach, we considered
26 collocation as a form of *proximate contact* — people in the same room — and therefore
27 established collocation only when this occurred for “an extended period” [30]. By varying
28 this threshold between 30 and 40 minutes we found the contact networks to be structurally
29 similar as their clustering coefficients (over the semester) were highly correlated ($r = 0.97$).
30 In our experiments, we used the 40 minute threshold as it was more computationally less
31 expensive. We provide more details of our approach in [SI Data Processing](#) and in [SI Modeling](#)
32 [Contact and Movement](#).

33 Modeling Policies

34 We compared the disease outcomes and burdens of 2 policies, Remote Instruction (RI) and
35 Localized Closure (LC), both of which are modeled with WIMOB. For RI we inferred en-
36 rollment size of each course in Fall 2019 by determining the number of unique individuals
37 that visited lecture locations during scheduled times. After the first week, we applied the
38 RI by removing all visiting edges in K_t for any $l_c \in L_{RI}$ if visits were during lecture times of
39 course c with an enrollment ≥ 30 . This helped create counterfactual contact networks G'_t .
40 The removal of edges from K described the mobility budget of RI and the structure of G'_t
41 indicated the risk of exposure budget. We designed LC with these budgets by identifying

1 locations for closure (L_{LC}) with different algorithms, such as *PageRank* [54], *Eigenvector*
2 *Centrality* [8], *Load Centrality* [48], and *Betweenness Centrality* [24]. When a location was
3 closed, we removed all edges in K_t connected to any $l_x \in L_{LC}$. We aggregated the movement
4 graph H_t over a week and apply the algorithms to identify locations. Subsequently, we iden-
5 tified the number of top-ranked locations to remove such that the resultant counterfactual
6 contact network G_t'' has is within 1% of the budget. The budgets varied for different be-
7 havioral scenarios and we only compared policies within the same scenario. This is further
8 elaborated in [SI Modeling Policies and Scenarios](#).

9 Disease Simulation

10 Here we summarize our epidemiological model and calibration process.

11 Agent-Based Model

12 We constructed an agent-based model (ABM) that captures the spread of COVID-19 be-
13 tween individuals active on campus. This ABM leveraged the contact networks produced by
14 WIMOB. The simulation iterated a time-step each day with the underlying contact networks
15 i.e., G_t for no interventions, G_t' for RI, and G_t'' for LC. Each agent in our ABM follows a mod-
16 ified version of *susceptible-exposed-infectious-removed* (SEIR) template that disambiguates
17 the *infectious* compartment into *asymptomatic* and *symptomatic*. New infections were in-
18 troduced to the model either externally or internally. External transmission arose because
19 individuals could contract the virus outside campus and bring the infection back for local
20 spread [43, 49]. We adopted data of positive cases from Fulton county [51] with a scaling
21 factor α to estimate the probability that a *susceptible* individual, who is active on campus,
22 was infected from interactions that take place outside campus. Internal transmissions are
23 determined by p , as the probability of *susceptible* individuals in contact with an *infectious*
24 one. We calibrated the parameters related to disease transmission by training and validating
25 our models on the positivity rate reported by GT surveillance testing [28]. [SI Agent-Based](#)
26 [Model](#) details the disease progression and describes the various parameters.

27 Calibration

28 In our study, we estimated three key parameters: (i) infectious individuals at day 0, (ii)
29 transmission probability between infectious and susceptible individuals, and (iii) the proba-
30 bility of infection transmission from contacts outside the network. We estimated the range
31 of optimal parameters for disease transmission by minimizing the root means square error
32 (r.m.s.e) between the Georgia Tech surveillance testing positive rates [52, 28] and the ob-
33 served positivity rate of the model every week—percentage of new *asymptomatic* cases out
34 of the total testable population. The surveillance testing conducted by Georgia Tech was
35 designed for detecting individuals who contracted Covid-19 without showing Flu-like symp-
36 toms within the community [52]. We calibrated the model on the positivity rates on the
37 first 5 weeks of Fall 2020. To attain a point estimation of the optimal parameters, we fitted
38 the model to predict trends in the remaining weeks by running a numerical optimization

Table 2: Model Parameters of the ABM

Parameter	Definition	Value	Std	Source
p	Transmission probability: For any edge between a <i>susceptible</i> and <i>infectious</i> individual in the contact network, p is the probability that the <i>susceptible</i> person will enter into the <i>exposed</i> state. This only dictates internal transmission	0.034	0.007	Calibration
α	Scaling factor of the normalized confirmed cases in the surrounding county (1). This is the parameter for us to generate $I_{out}(t)$	0.032	0.0032	Calibration
I_0	Proportion of population that is <i>asymptomatic</i> at day 0	0.012	0.0009	Calibration
p_S	Probability of <i>exposed</i> persons becoming symptomatic	0.66	-	[36]
Δ_S	Incubation period (days) since the first day of exposure	5	-	[36]
$\Delta_{Asym \rightarrow R}$	Asymptomatic duration (days); it is the time taken for an <i>asymptomatic</i> person to recover since the first day of exposure	7	-	[36]
Δ_I, σ_I	Time of an <i>symptomatic</i> entering <i>isolated</i> since the first day of exposure of a <i>symptomatic</i> person	8	2	[27]
Δ_R, σ_R	Time for recovery for a <i>symptomatic</i> , since the first day of exposure	12	2	[42]
p_D	Death rate under isolation	0.0006	-	[42]

The variables p , α , and I_0 are estimated by calibrating the simulation model on the first 5 weeks of positivity rates provided by GT surveillance for Fall 2020, while incorporating external cases from Fulton County. These parameters were found by validating the ABM on the remaining weeks of Fall 2020. [SI Calibration](#) provides additional details.

1 algorithm, Nelder-Mead [44]. To account for quantitative uncertainty, we estimated a range
 2 of parameters, within 40% of optimum r.m.s.e [11]. For other model parameters, we adopted
 3 values proposed by previous studies on similar populations [36, 27, 42]. Table 2 shows a full
 4 list of our parameters.

5 Note that our calibration characterized latent factors associated with pandemic-related
 6 cautious behaviors, including the relationship with external transmission. And these factors
 7 could be related to “county characteristics, partisanship, media consumption, and racial and
 8 ethnic composition” [1]. To account for the effect of these varying latent factors on dis-
 9 ease outcomes, we performed additional calibrations for hypothetical variations in disease
 10 spread. For these analyses we kept the GT mobility behavior constant while calibrating the
 11 model on different time periods of surveillance testing and on positivity rates of different
 12 U.S. universities — University of Illinois at Urbana-Champaign [50] and University of Cali-
 13 fornia [68], Berkeley. We evaluated RI and LC on these variations and describe the design of
 14 these complementary experiments in [SI Sensitivity Analyses](#). See [SI Calibration](#) for details
 15 on the calibration process and results of all variations are in [Table S3](#).

16 Data Availability

17 Interested parties can request deidentified version of this data through appropriate data use
 18 agreements. The data are not publicly available as disclosing them would breach our IRB
 19 protocol.

20 Code Availability

21 The code used for processing the WiFi logs into mobility networks can be requested un-
 22 der requisite terms of use agreements. The code for simulation is publicly available at:

1 <https://github.com/AdityaLab/cv-wifi-GT>

2 **Author Contributions Statement**

3 V.D.S., M.D.C., G.D.A., L.N.S., and B.A.P. designed the research; V.D.S., J.X., L.N.S., and
4 B.A.P. performed the research; V.D.S. and G.D.A. acquired the data; V.D.S., J.X., J.C.,
5 S.S., and M.M. analyzed, and interpreted data for the work; V.D.S., J.X., M.D.C., G.D.A.,
6 L.N.S., and B.A.P. wrote the paper.

7 **Acknowledgements**

8 This paper is based on work partially supported by the NSF (Expeditions CCF-1918770, CA-
9 REER IIS-2028586, RAPID IIS-2027862, RAPID IIS-2027689, Medium IIS-1955883, NRT
10 DGE-1545362, CCF-2115126), CDC MInD program, ORNL, and Semiconductor Research
11 Corporation (in collaboration with Intel Labs). Some research personnel were supported by
12 internal seed funding from the Georgia Institute of Technology and Georgia Tech Research
13 Institute. Other computing resources were provided by the Office of Information Technology
14 at Georgia Tech. The authors thank Di Wu, Hanna Hamilton, and Dima Nazzal (Georgia
15 Institute of Technology) for their analysis of EN.

16 **Competing Interests**

17 The authors declare no competing interests.

18 **Materials Correspondence**

19 Correspondence should be addressed to B.A.P., e-mail: badityap@cc.gatech.edu.

References

- [1] M. Andersen. Early evidence on social distancing in response to covid-19 in the united states. *Available at SSRN 3569368*, 2020.
- [2] J. P. Azevedo, A. Hasan, D. Goldemberg, S. A. Iqbal, and K. Geven. *Simulating the potential impacts of COVID-19 school closures on schooling and learning outcomes: A set of global estimates*. The World Bank, 2020.
- [3] H. S. Badr, H. Du, M. Marshall, E. Dong, M. M. Squire, and L. M. Gardner. Association between mobility patterns and covid-19 transmission in the usa: a mathematical modelling study. *The Lancet Infectious Diseases*, 20(11):1247–1254, 2020.
- [4] E. Bagdasaryan, G. Berstein, J. Waterman, E. Birrell, N. Foster, F. B. Schneider, and D. Estrin. Ancile: Enhancing privacy for ubiquitous computing with use-based privacy. In *Proceedings of the 18th ACM Workshop on Privacy in the Electronic Society*, pages 111–124, 2019.

- [5] R. Bahl, N. Eikmeier, A. Fraser, M. Junge, F. Keesing, K. Nakahata, and L. Z. Wang. Modeling covid-19 spread in small colleges. *arXiv preprint arXiv:2008.09597*, 2020.
- [6] J. C. Benneyan, C. Gehrke, I. Ilies, and N. Nehls. Potential community and campus covid-19 outcomes under university and college reopening scenarios. *medRxiv*, 2020.
- [7] S. G. Benzell, A. Collis, and C. Nicolaides. Rationing social contact during the covid-19 pandemic: Transmission risk and social benefits of us locations. *Proceedings of the National Academy of Sciences*, 117(26):14642–14644, 2020.
- [8] P. Bonacich. Some unique properties of eigenvector centrality. *Social networks*, 29(4):555–564, 2007.
- [9] M. Borowiak, F. Ning, J. Pei, S. Zhao, H.-R. Tung, and R. Durrett. Controlling the spread of covid-19 on college campuses. *arXiv preprint arXiv:2008.07293*, 2020.
- [10] C. O. Buckee, S. Balsari, J. Chan, M. Crosas, F. Dominici, U. Gasser, Y. H. Grad, B. Grenfell, M. E. Halloran, M. U. Kraemer, et al. Aggregated mobility data could help fight covid-19. *Science (New York, NY)*, 368(6487):145–146, 2020.
- [11] S. Chang, E. Pierson, P. W. Koh, J. Gerardin, B. Redbird, D. Grusky, and J. Leskovec. Mobility network models of covid-19 explain inequities and inform reopening. *Nature*, 589(7840):82–87, 2021.
- [12] I. Chirikov, K. M. Soria, B. Horgos, and D. Jones-White. Undergraduate and graduate students’ mental health during the covid-19 pandemic. 2020.
- [13] T. Choudhury and A. Pentland. Characterizing social networks using the sociometer. *Proceedings of the North American association of computational social and organizational science (NAACSOS)*, 2004.
- [14] Cisco. Wi-fi location-based services 4.1 design guide white paper, 2014. Available at: <https://www.cisco.com/c/en/us/td/docs/solutions/Enterprise/Mobility/WiFiLBS-DG/wifich2.html>.
- [15] V. Das Swain, H. Kwon, B. Saket, M. B. Morshed, K. Tran, D. Patel, Y. Tian, J. Philipose, Y. Cui, T. Plötz, et al. Leveraging wifi network logs to infer social interactions: A case study of academic performance and student behavior. *arXiv e-prints*, 2020.
- [16] D. Dave, A. Friedson, K. Matsuzawa, J. J. Sabia, and S. Safford. Jue insight: Were urban cowboys enough to control covid-19? local shelter-in-place orders and coronavirus case growth. *Journal of urban economics*, page 103294, 2020.
- [17] A. DePietro. Here’s a look at the impact of coronavirus (covid-19) on colleges and universities in the u.s., 2020. Available at: <https://www.forbes.com/sites/andrewdepietro/2020/04/30/impact-coronavirus-covid-19-colleges-universities/?sh=26c3f79c61a6>.

- [18] E. Dorn, B. Hancock, J. Sarakatsannis, and E. Viruleg. Covid-19 and student learning in the united states: The hurt could last a lifetime. *McKinsey & Company*, 2020.
- [19] N. Eagle and A. S. Pentland. Reality mining: sensing complex social systems. *Personal and ubiquitous computing*, 10(4):255–268, 2006.
- [20] M. H. S. Eldaw, M. Levene, and G. Roussos. Presence analytics: making sense of human social presence within a learning environment. In *2018 IEEE/ACM 5th International Conference on Big Data Computing Applications and Technologies (BDCAT)*, pages 174–183. IEEE, 2018.
- [21] N. Ferguson, D. Laydon, G. Nedjati Gilani, N. Imai, K. Ainslie, M. Baguelin, S. Bhatia, A. Boonyasiri, Z. Cucunuba Perez, G. Cuomo-Dannenburg, et al. Report 9: Impact of non-pharmaceutical interventions (npis) to reduce covid19 mortality and healthcare demand.
- [22] C. for Disease Control and Prevention. Community npis: Flu prevention in community settings, 2020. Available at: <https://www.cdc.gov/nonpharmaceutical-interventions/community/index.html>.
- [23] C. for Disease Control and Prevention. People at increased risk and other people who need to take extra precautions, 2020. Available at: <https://www.cdc.gov/coronavirus/2019-ncov/need-extra-precautions/index.html>.
- [24] L. C. Freeman. A set of measures of centrality based on betweenness. *Sociometry*, pages 35–41, 1977.
- [25] S. Friedman, T. Hurley, T. Fishman, and P. Fritz. Covid-19 impact on higher education, 2020. Available at: <https://www2.deloitte.com/us/en/pages/public-sector/articles/covid-19-impact-on-higher-education.html>.
- [26] R. Frutos, M. Lopez Roig, J. Serra-Cobo, and C. A. Devaux. Covid-19: the conjunction of events leading to the coronavirus pandemic and lessons to learn for future threats. *Frontiers in medicine*, 7:223, 2020.
- [27] K. Gaythorpe, N. Imai, G. Cuomo-Dannenburg, M. Baguelin, S. Bhatia, A. Boonyasiri, and A. Cori. Report 8: Symptom progression of covid-19, 2020.
- [28] G. Gibson, J. S. Weitz, M. P. Shannon, B. Holton, A. Bryksin, B. Liu, S. Bramblett, J. Williamson, M. Farrell, A. Ortiz, C. T. Abdallah, and A. J. García. Surveillance-to-diagnostic testing program for asymptomatic sars-cov-2 infections on a large, urban campus - georgia institute of technology, fall 2020. *medRxiv*, 2021. Available at: <https://www.medrxiv.org/content/early/2021/01/31/2021.01.28.21250700>.
- [29] P. T. Gressman and J. R. Peck. Simulating covid-19 in a university environment. *Mathematical biosciences*, 328:108436, 2020.

- [30] E. S. Gurley. Strategies to support the covid-19 response in lmic, 2020. Available at: [https://hopkinglobalhealth.org/assets/documents/CGH_Webinar_-_Contact_Tracing_\(Final_Version\).pdf](https://hopkinglobalhealth.org/assets/documents/CGH_Webinar_-_Contact_Tracing_(Final_Version).pdf).
- [31] H. L. Hambridge, R. Kahn, and J.-P. Onnela. Examining sars-cov-2 interventions in residential colleges using an empirical network. *medRxiv*, 2021.
- [32] M. Harris and K. Holley. Universities as anchor institutions: Economic and social potential for urban development. In *Higher education: Handbook of theory and research*, pages 393–439. Springer, 2016.
- [33] N. Haug, L. Geyrhofer, A. Londei, E. Dervic, A. Desvars-Larrive, V. Loreto, B. Pinior, S. Thurner, and P. Klimek. Ranking the effectiveness of worldwide covid-19 government interventions. *Nature human behaviour*, 4(12):1303–1312, 2020.
- [34] J. S. Jia, X. Lu, Y. Yuan, G. Xu, J. Jia, and N. A. Christakis. Population flow drives spatio-temporal distribution of covid-19 in china. *Nature*, 582(7812):389–394, 2020.
- [35] R. E. Jordan, P. Adab, and K. Cheng. Covid-19: risk factors for severe disease and death, 2020.
- [36] P. Keskinocak, B. E. Oruc, A. Baxter, J. Asplund, and N. Serban. The impact of social distancing on covid19 spread: State of georgia case study. *Plos one*, 15(10):e0239798, 2020.
- [37] S. M. Kissler, C. Tedijanto, E. Goldstein, Y. H. Grad, and M. Lipsitch. Projecting the transmission dynamics of sars-cov-2 through the postpandemic period. *Science*, 368(6493):860–868, 2020.
- [38] K. Kondo. Simulating the impacts of interregional mobility restriction on the spatial spread of covid-19 in japan. *medRxiv*, pages 2020–12, 2021.
- [39] M. Korn. Colleges begin mapping out a more normal fall—with caveats, 2021. Available at: https://www.wsj.com/articles/colleges-begin-mapping-out-a-more-normal-fall-with-caveats-11615800600?reflink=desktopwebshare_permalink.
- [40] W. H. Kruskal and W. A. Wallis. Use of ranks in one-criterion variance analysis. *Journal of the American statistical Association*, 47(260):583–621, 1952.
- [41] M. E. Loades, E. Chatburn, N. Higson-Sweeney, S. Reynolds, R. Shafran, A. Brigden, C. Linney, M. N. McManus, C. Borwick, and E. Crawley. Rapid systematic review: the impact of social isolation and loneliness on the mental health of children and adolescents in the context of covid-19. *Journal of the American Academy of Child & Adolescent Psychiatry*, 2020.
- [42] B. Lopman, C. Y. Liu, A. Le Guillou, A. Handel, T. L. Lash, A. P. Isakov, and S. M. Jenness. A modeling study to inform screening and testing interventions for the control of sars-cov-2 on university campuses. *Scientific Reports*, 11(1):1–11, 2021.

- [43] D. Mangrum and P. Niekamp. Jue insight: College student travel contributed to local covid-19 spread. *Journal of Urban Economics*, page 103311, 2020.
- [44] K. I. McKinnon. Convergence of the nelder–mead simplex method to a nonstationary point. *SIAM Journal on optimization*, 9(1):148–158, 1998.
- [45] Z. Mehrab, A. goud Ranga, D. Sarkar, S. Venkatramanan, Y. C. Baek, S. Swarup, and M. Marathe. High resolution proximity statistics as early warning for us universities reopening during covid-19. *medRxiv*, 2020.
- [46] A. W.-F. L. Monitor. Wifi location monitor accuracy, 2016. Available at: <https://www.accuware.com/support/wi-fi-location-monitor-accuracy/>.
- [47] S. S. Morse, R. L. Garwin, and P. J. Olsiewski. Next flu pandemic: what to do until the vaccine arrives? 2006.
- [48] M. E. Newman. Scientific collaboration networks. ii. shortest paths, weighted networks, and centrality. *Physical review E*, 64(1):016132, 2001.
- [49] A. Nierenberg and A. Pasick. Schools briefing: University outbreaks and parental angst, 2020. Available at: <https://www.nytimes.com/2020/08/19/us/colleges-closing-covid.html>.
- [50] U. of Illinois at Urbana-Champaign. On-campus covid-19 testing, 2020. Available at: <https://covid19.illinois.edu/on-campus-covid-19-testing-data-dashboard/>.
- [51] G. D. of Public Health. Georgia department of public health daily status report, 2020. Available at: <https://dph.georgia.gov/covid-19-daily-status-report>.
- [52] G. I. of Technology. Georgia tech launches campus coronavirus testing, 2020. Available at: <https://health.gatech.edu/coronavirus/testing-launched>.
- [53] W. H. Organization et al. Critical preparedness, readiness and response actions for covid-19: interim guidance, 22 march 2020. Technical report, World Health Organization, 2020.
- [54] L. Page, S. Brin, R. Motwani, and T. Winograd. The pagerank citation ranking: Bringing order to the web. Technical report, Stanford InfoLab, 1999.
- [55] B. Pfefferbaum and C. S. North. Mental health and the covid-19 pandemic. *New England Journal of Medicine*, 383(6):510–512, 2020.
- [56] R. C. Rabin. C.d.c. officials say most available evidence indicates schools can be safe if precautions are taken on campus and in the community, 2021. Available at: <https://www.nytimes.com/2021/01/26/world/cdc-schools-reopening.html>.
- [57] A. Rodríguez, A. Tabassum, J. X. Jiaming Cui, J. Ho, P. Agarwal, B. Adhikari, and B. A. Prakash. Deepcovid: An operational deep learning-driven framework for explainable real-time covid-19 forecasting. *Proceedings of the AAAI Conference on Artificial Intelligence*, Apr. 2021.

- [58] R. Rojas and M. Delkic. As states reopen, governors balance existing risks with new ones, 2020. Available at: <https://www.nytimes.com/2020/05/17/us/coronavirus-states-reopen.html>.
- [59] M. Salathé, M. Kazandjieva, J. W. Lee, P. Levis, M. W. Feldman, and J. H. Jones. A high-resolution human contact network for infectious disease transmission. *Proceedings of the National Academy of Sciences*, 107(51):22020–22025, 2010.
- [60] L. Y. Saltzman, T. C. Hansel, and P. S. Bordnick. Loneliness, isolation, and social support factors in post-covid-19 mental health. *Psychological Trauma: Theory, Research, Practice, and Policy*, 2020.
- [61] P. Sapiezynski, A. Stopczynski, R. Gatej, and S. Lehmann. Tracking human mobility using wifi signals. *PloS one*, 10(7):e0130824, 2015.
- [62] S. Saul and S. Hubler. Colleges vowed a safer spring. then students, and variants, arrived, 2021. Available at: <https://www.nytimes.com/2021/02/09/us/colleges-covid.html>.
- [63] L. J. Schoen. Guidance for building operations during the covid-19 pandemic. *ASHRAE Journal*, 5(3), 2020.
- [64] A. Smalley. Higher education responses to coronavirus (covid-19). In *National Conference of State Legislatures*. [Accessed May 15, 2020]. <https://www.ncsl.org/research/education/higher-education-responses-to-coronavirus-covid-19.aspx>, 2020.
- [65] J. Suh, E. Horvitz, R. W. White, and T. Althoff. Population-scale study of human needs during the covid-19 pandemic: Analysis and implications. In *Proceedings of the 14th ACM International Conference on Web Search and Data Mining*, pages 4–12, 2021.
- [66] T. N. Y. Times. Tracking coronavirus cases at u.s. colleges and universities, 2021. Available at: <https://www.nytimes.com/interactive/2021/us/college-covid-tracker.html>.
- [67] A. Trivedi, C. Zakaria, R. Balan, and P. Shenoy. Wifitrace: Network-based contact tracing for infectious diseases using passive wifi sensing. *arXiv preprint arXiv:2005.12045*, 2020.
- [68] B. University of California. Coronavirus dashboard testing, 2020. Available at: <https://coronavirus.berkeley.edu/dashboard/>.
- [69] J. L. Wang and M. C. Loui. Privacy and ethical issues in location-based tracking systems. In *2009 IEEE International Symposium on Technology and Society*, pages 1–4. IEEE, 2009.
- [70] S. Ware, C. Yue, R. Morillo, J. Lu, C. Shang, J. Kamath, A. Bamis, J. Bi, A. Russell, and B. Wang. Large-scale automatic depression screening using meta-data from wifi infrastructure. *Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies*, 2(4):1–27, 2018.

- [71] S. Watson, S. Hubler, D. Ivory, and R. Gebeloff. A new front in america's pandemic: College towns, 2020. Available at: <https://www.nytimes.com/2020/09/06/us/colleges-coronavirus-students.html>.
- [72] K. A. Weeden and B. Cornwell. The small-world network of college classes: implications for epidemic spread on a university campus. *Sociological science*, 7:222–241, 2020.
- [73] A. Wesolowski, C. Metcalf, N. Eagle, J. Kombich, B. T. Grenfell, O. N. Bjørnstad, J. Lessler, A. J. Tatem, and C. O. Buckee. Quantifying seasonal population fluxes driving rubella transmission dynamics using mobile phone data. *Proceedings of the National Academy of Sciences*, 112(35):11114–11119, 2015.
- [74] C. Woolston. Signs of depression and anxiety soar among us graduate students during pandemic, 2020. Available at: <https://www.nature.com/articles/d41586-020-02439-6>.
- [75] V. Yuen. Mounting peril for public higher education during the coronavirus pandemic. *Center for American Progress*, 2020.
- [76] C. Zakaria, A. Trivedi, E. Cecchet, M. Chee, P. Shenoy, and R. Balan. Analyzing the impact of covid-19 control policies on campus occupancy and mobility via passive wifi sensing. *arXiv preprint arXiv:2005.12050*, 2020.
- [77] Y. Zhang, B. Li, and K. Ramayya. Learning individual behavior using sensor data: The case of gps traces and taxi drivers. *Forthcoming in Information Systems Research*, 2020.
- [78] H. Zhao and Z. Feng. Staggered release policies for covid-19 control: Costs and benefits of relaxing restrictions by age and risk. *Mathematical biosciences*, 326:108405, 2020.
- [79] Y. Zhou, R. Xu, D. Hu, Y. Yue, Q. Li, and J. Xia. Effects of human mobility restrictions on the spread of covid-19 in shenzhen, china: a modelling study using mobile phone data. *The Lancet Digital Health*, 2(8):e417–e424, 2020.

Supplementary Information Appendix

1 Supplementary Methods

2 In this section, first, we describe the primary data source for mobility models (WiMOB),
3 the data used for calibrating our simulations, and for comparison of contact networks with
4 methods using enrollment data (EN). Next, we describe how we construct counterfactual
5 mobility networks under the two main policies of interest in our study: remote instruction
6 (RI) and localized closures (LC). Finally, we describe an agent-based-model (ABM) of disease
7 transmission, which has a contact structure based on WiMOB, and how this model was
8 calibrated.

9 Data

10

11 WiFi Mobility

12 We use data provided by the IT management facility at Georgia Institute of Technology (GT)
13 which accumulates WiFi access point (AP) logs over time. The primary use of WiFi network
14 logs is for maintenance and security purposes. We mine these logs post-hoc to describe the
15 mobility of individuals on campus, which we refer to as WiMOB. Here mobility is expressed
16 by visits to certain locations that are demarcated by a corresponding AP. WiMOB can also
17 describe dwelling (duration of visits) and collocation (dwelling in the presence of others
18 around the same AP).

19 The campus WiFi network spans 6959 APs distributed between 240 buildings (and some
20 outdoor locations). We label APs according to which building they are inside, along with
21 the closest room or space (e.g, hallway, lobby, suite, cafe, etc.). The AP may or may not
22 reside inside the room, however, in most cases, only a single AP is associated with space.
23 For less than 5% of the APs, the AP shared association to space with another AP. This
24 many-to-one mapping is typically in the case of large halls and auditoriums. We resolve such
25 many-to-one associations by using APs as a proxy of the space they are associated with.
26 Therefore, individuals connected to different APs in the same space will still be identified
27 as collocated. Similarly, an individual could connect to the network with multiple devices.
28 However, less than 1% logs show that a user is connected to multiple APs around the same
29 time. Therefore, WiMOB is agnostic to which device connects to the APs to proxy the
30 presence of the individual. For this study, we obtain the WiFi network logs retrospectively
31 for all of Fall 2019, and the data for Fall 2020 was provided on a per-day basis. Each day,
32 approximately 33,000 different people connect their devices to the WiFi network on campus.
33 Overall in Fall 2019, approximately 40,000 different people connected to the campus network.

34 Asymptomatic surveillance testing data

35 We calibrated the ABM using the publicly reported positivity rate on the GT campus as
36 reported through the asymptomatic surveillance and diagnostic testing program [52]. The

1 testing program used pooled saliva sample surveillance with follow-up diagnostic testing.
2 The positivity rate was reported each day, but individuals must wait at least 1 week between
3 tests. We aggregated the positivity rate by week during the Fall 2020 semester.

4 **Confirmed case data**

5 When calibrating our ABM, we considered the reported confirmed cases in Fulton County [51],
6 the county in which GT is located. The ‘Confirmed COVID-19 Cases’ reported in this dataset
7 are cases that have been confirmed with a positive molecular (PCR) test. We considered
8 cases during the Fall 2020 semester to inform external transmissions in the ABM.

9 **Enrollment network summary statistics**

10 We compare structural properties of contact networks constructed with WIMOB to contact
11 networks constructed from GT’s course enrollment transcripts (EN) To ensure that individ-
12 uals cannot be identified by combining anonymous WiFi network logs and course enrollment
13 transcripts, we only use aggregate statistics from EN— structural characteristics of the con-
14 tact networks described in Table S2. The EN network was based on Fall 2019 transcripts for
15 GT’s Atlanta campus. These were cleaned to account for cross-listed courses and was used
16 to determine which students were classmates with each other to form a contact network.

17 **WiFi Mobility Models**

18 **Inferring location from Logs**

19 WIMOB is our approach to describe contact between people and movement of people be-
20 tween locations. The first step requires using WiFi network logs to infer when individuals
21 were at specific locations on campus by determining when devices were connected to the
22 corresponding APs. Our system mines the WiFi network logs that are populated via the
23 Simple Network Management Protocol (SNMP) — a standard and widely used monitoring
24 protocol to organize device association behavior to a WiFi network. Periodic SNMP updates
25 can be caused either by poll requests to the APs that log which devices are associated with
26 it at that time. However, devices can appear invisible to detached from an AP for multiple
27 reasons, for example, when devices are idle. Otherwise, SNMP updates can occur whenever
28 a new device connects, which is typical when individuals move between APs. Our approach
29 exploits this factor to first mine periods when individuals are moving, then identify periods
30 of dwelling between movements, and finally determine collocation when two or more individ-
31 uals are dwelling near the same AP. This system follows from other studies that mine WiFi
32 logs [20, 70] and the detailed processing pipeline and evaluation is presented in [15]. This
33 system to infer collocations has been tested against lecture attendance and reports a high
34 precision of 0.89, but a relatively lower specificity of 0.79 [15]. While it is not likely to show
35 false-positives, it has a possibility to erroneously mark people absent from a location even
36 though they were there. However, for the purposes of our study, a contact network is made
37 over an entire day and it only needs a single collocation instance for us to consider contact.
38 And therefore we believe this limitation would not significantly affect our models.

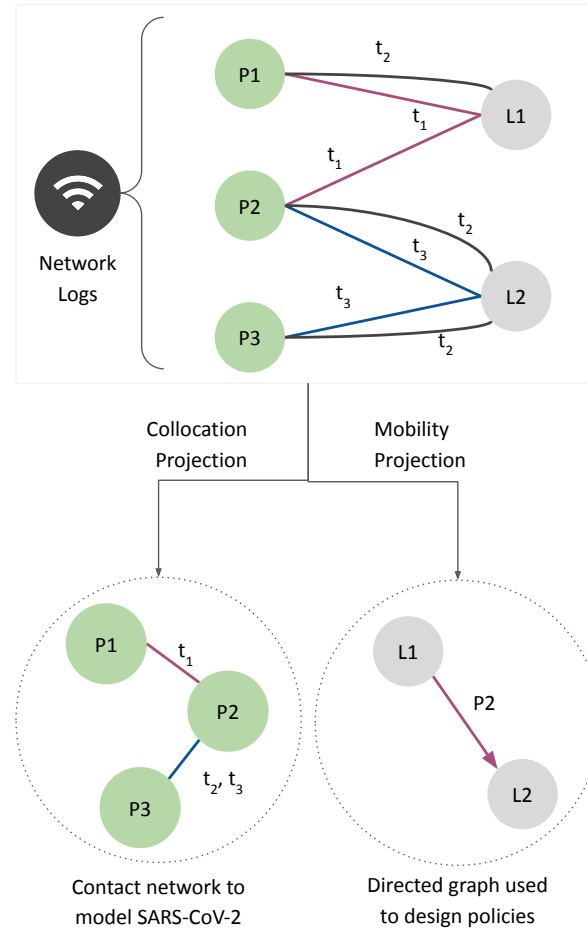


Figure S1: In a managed network, SNMP updates the logs by describing device association to an AP at a certain timestamp. WiMOB mines these logs to characterize mobility as a bipartite graph. The nodes are partitioned to describe people nodes (e.g., $P1$, $P2$) connected to locations nodes (e.g., $L1$, $L2$). Every edge across the partition describes people visiting locations on campus during different times (e.g., t_1 , t_2). Projecting the bipartite on people nodes helps construct a contact network (e.g., $P1$ and $P2$ were collocated at $L1$ at t_1), while projecting it on locations helps construct a directed movement graph ($P2$ dwelled at $L1$ and then at $L2$).

1 Characterizing Logs as Contact and Movement Networks

2 After inferring where an individual is located on campus, we represent the entire community
3 behavior as graphs. We describe a bipartite graph, K , that shows when a user is at a given
4 location on campus (Figure S1). This bipartite graph has edges connecting a set of m
5 people, P , to a set of n locations, L . An individual can have multiple edges connecting to
6 the location if they visited that location multiple times (e.g., t_1 , t_2). The edge data contains
7 the start and end times of these dwelling periods. For these bipartite graphs, we make a
8 projection on set P to describe collocation. This projection graph, G , contains an edge
9 between users if they were visiting the same location during overlapping times. Since we
10 do not use RTLS, our approach can only identify if people were in the vicinity of the same
11 AP, but does not describe the distance between them. However, it can reasonably determine
12 collocation in the same room [15]. Since our study is limited to localizing people indoors,

1 we adapt the definition of *proximate contact* [30] where people might be “more than 6 feet
2 but in the same room for an extended period”. In our work, we use a lower bound threshold
3 of 40 minutes to determine proximate contact. Therefore, individuals are only considered
4 in contact when they are collocated in a room for 40 minutes or more. This threshold
5 was set up to account for typical lecture duration on campus (for standard 3-credit hour
6 courses taught 3 times a week). Additionally, we compared the clustering coefficient of the
7 contact networks for different days by varying contact thresholds as 30 and 40 minutes. The
8 Pearson’s r correlation of these was very high 0.97. Thus, we chose to use the 40 minute
9 threshold as it produced structurally similar graphs while requiring lower space constraints.
10 Every edge between two individuals contains a list of locations where they were possibly
11 in contact. G forms the basis of the contact-network that we use an agent-based model
12 to simulate. Alternatively, we also make a projection on the set L . This projection is a
13 directed graph, H , where an edge from L_i to L_j represents movement from the first location
14 to the next within a span of 60 minutes. GT’s large urban campus with pedestrian pathways
15 and motorized transit services enables direct movement between any two places on campus
16 within the threshold. The 60 minutes threshold helps discount erroneously labeling returning
17 from outside campus (e.g., non-residential students visiting two different locations between
18 2 days). H effectively describes how locations are connected and which locations could be
19 more conducive to attracting and disseminating the virus. As a consequence, the H helps
20 inform policy design. We compute the bipartite graph and its projections for each day of
21 the semester.

22 **Modeling Policies and Scenarios**

23

24 **RI: Offering Large Classes Online**

25 As a response to COVID-19, prior work has recommended using EN to enforce a form of
26 RI—moving classes large to an online remote instruction setup while other classes are offered
27 in-person [29, 9, 72]. While we have access to aggregate insights on EN contact networks,
28 our study protocol prohibits us from accessing course-specific information at an individual
29 level. Therefore to infer individual enrollment, we analyze the edges of the bipartite graph
30 K . For this, we first scrape the GT’s course roster for Fall 2019 (filtered to only represent
31 the Atlanta campus). This process provides us with a location and weekly schedule for every
32 lecture conducted on campus, including its various sections. With this information, we are
33 able to identify which edges represent visits to lectures, and subsequently, we can account
34 for unique visitors to a lecture. Thus, we can first identify the number of unique individuals
35 on campus who are enrolled in classes. The aggregate data from course enrollment reports
36 that 21,299 students were enrolled in Fall 2019. In comparison, our inference identifies
37 22,248 students. The excess number can be explained by the fact that our method does
38 not distinguish between instructors, TAs, and students. Next, we study the unique visitors
39 to every lecture in the scraped course schedule which gives us an estimate for the size of
40 every class. Given the limitations of our data processing, actual enrollment sizes could be
41 larger, but our process is less likely to count false positives [15]. Finally, to model RI, for the

1 contact network G_t , we create a counterfactual network G'_t for each day t . These exclude
2 collocations that took place at lecture locations during lecture times. If two people were
3 connected solely by proximity during lectures — in a class with large enrollment — they will
4 appear disconnected in the counterfactual network.

5 **LC: Closing Important Locations**

6 This article demonstrates the effectiveness of localized closures, LC, which are targeted in-
7 terventions to seize mobility at different spaces on campus. For this, we identify important
8 locations on campus by analyzing H . In the main paper, LC uses *PageRank* [54] as an illus-
9 trative algorithm to identify important location nodes. For robustness, we apply various ad-
10 ditional algorithms to identify highly authoritative nodes in H — betweenness centrality [24],
11 eigenvector centrality [8], and load centrality [48]. In the SI Appendix, we distinguish these
12 different policies as LC_{PRank} , LC_{BCen} , LC_{ECen} , LC_{LCen} . Since RI captures a weekly schedule to
13 determine enrollment, LC is implemented to find locations based on behavior from the past
14 7 days of mobility. We apply the weighted version of the algorithms mentioned earlier on
15 the directed graph representing movement, H . The edge weight is based on the number of
16 instances of movement between any L_i and L_j . After sorting the locations by importance,
17 we determine the number of locations to shut down based on different budgets induced by
18 RI— mobility and risk of exposure. For this purpose, we take the approach of a greedy algo-
19 rithm which successively removes highly-ranked locations till the constraint is met (within
20 1% margin of error). Similar to RI, LC also render counterfactual collocation networks, G''_t
21 for each day t . In these networks, we remove instances of collocations that occurred at the
22 shutdown locations. **Figure S19** and **Figure S20** shows the categories of buildings where
23 different spaces are closed by LC policies.

24 **Inducing Budgets and Characterizing Behavioral Scenarios**

25 We now describe how we compare the RI and LC policies. First, we consider the effects of
26 these policies under three behavioral scenarios. These scenarios express the spillover effects of
27 closure that lead to students avoiding campus entirely because their entire schedule is forced
28 online. This analysis assumes that the motivation to be present on campus is determined
29 primarily by enrollment. We consider that, if a student has a full course load (enrolled in a
30 minimum of 3 classes) and all their classes are offered online, that student might have less
31 incentive to visit campus at all (for any engagement) and thus practice *Avoidance*. Since LC
32 could end up closing classrooms, it can also lead to academic schedules being affected and
33 elicit *Avoidance* behavior. As a result, we describe three behavioral scenarios. *Persistence*,
34 is the preliminary, or null scenario, which represents no *Avoidance*. This counterfactual
35 collocation graph only removes edges directly affected by RI or LC. The second scenario
36 we model is *Non-Residential Avoidance* where only non-residential students with full online
37 schedules stop visiting campus entirely. Here the counterfactual graph will remove all edges
38 of non-residential students with fully online schedules. Lastly, the third scenario we model is
39 *Complete Avoidance* where any student with fully online schedules stops activity on campus
40 entirely (including residential students). Here the counterfactual graph will remove all edges
41 from any student with fully online schedules. Since our study protocol prohibits us from

1 mapping our data to other sources, we heuristically infer which individuals are likely to
2 be residential and which are not. We label individuals as residential when they dwell an
3 average of at least 15 minutes at residential locations between 6pm and 10am, on workdays
4 (Monday–Thursday).

5 Under each behavioral scenario, we limit the number of locations that can be closed under
6 the LC policy to ensure the level of restriction is constrained to be similar to the RI policy.
7 We limit the number of locations under two types of restrictive budgets. The first budget
8 is based on *mobility*, which is the percentage of edges remaining in the bipartite graph if
9 a policy were to be implemented. The second budget is based on *exposure risk*, which is
10 the number of unique individuals who would be in the 1-hop collocation neighborhood of
11 positive individuals. We compute this budget by randomly sampling 2.5% of the population
12 as positive, based on the highest 7-day average positivity rate reported by GT [28] in Fall
13 2019. Note, however, the effect of RI on campus can vary in different behavioral scenarios,
14 thereby changing the budget available to design a comparable LC policy. For instance, the
15 number of people at exposure risk is much lower in *Complete Avoidance*. As a result, we
16 build multiple alternate networks representing the effect of policies under counterfactual
17 behavioral scenarios.

18 The infection reduction outcomes and burdens of different policy interventions (under
19 various behavioral scenarios and budgets) is described in Table S4—Table S7 presents box-
20 plots that compares the distribution of disease control outcomes. Figure S11—Figure S14
21 show cumulative plots of disease control outcomes

22 Agent-based Model

23

24 Agent-Based Model

25 We constructed an agent-based model (ABM) that captures the spread of COVID-19 be-
26 tween individuals active within the GT community. The model is used to evaluate the
27 effectiveness of different policy interventions. We consider a modified version of the SEIR
28 framework for simulating the spread of COVID-19 [34, 11] by using an underlying contact
29 network given by WIMOB. Figure S2 shows the compartments of the framework. The
30 *susceptible* state (S) represents individuals who have not been infected and can contract the
31 disease by having contact with an infectious individual. The *exposed* state (E) is canoni-
32 cally equivalent to the “incubation period” and is similar to the pre-symptomatic state found
33 in related work [39, 36]. Individuals are considered *infectious* when they are in either the
34 *asymptomatic* state (Asym) or *symptomatic* state (Sym). Individuals in the *asymptomatic*
35 state are assumed to be the major “spreaders” [36] and transmit the infections to *susceptible*
36 individuals before they are *recovered* (R) [23] — after 7 days [36]. Since *asymptomatic*
37 is considered a state of mild severity [32], individuals in this state do not have a risk of
38 fatality. By contrast, for individuals in the *symptomatic* state, will be eventually *isolated*
39 (Iso) (e.g. self-quarantine, or hospitalization on campus). Once in the *isolated* state, they
40 cannot transmit the disease to individuals in the *susceptible* state. Unlike the *asymptomatic*
41 track, the *symptomatic* state is considered critical severity. Therefore, after moving to the

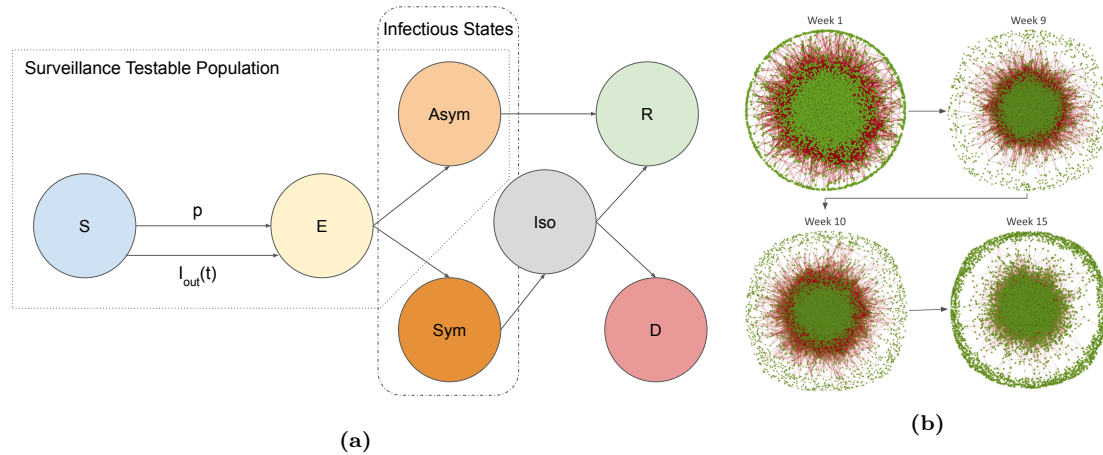


Figure S2: (a) The schematic of the compartments in our modified SEIR model. By the design of the GT surveillance testing [52, 28], the total testable population is defined as the summation of *susceptible*, *exposed*, and *asymptomatic*. Infectious persons are in either *symptomatic* or *asymptomatic*. For every effective edge in the mobility network, a susceptible individual that is exposed to an infectious person becomes infected with probability p . Individuals may also get infected due to an exposure not captured by the WiMOB network which occurs with probability $I_{out}(t)$ on day t , account for new infected cases. (b) The mobility behavior represented by WIMOB changes every day of the semester (shown weekly here). The contact network constructed from WiMOB forms the underlying contact structure of the ABM.

- 1 *isolated* state, individuals have risk of fatality and entering the death state (D). If the *iso-*
- 2 *lated* individual survives, they enter the *recovered* state. We assume immunity is preserved
- 3 and therefore after recovery the individual is no longer *susceptible*.

4 Definitions

5 Let $t = \{0, 1, 2, 3, \dots, T\}$ be the index of days in simulations. We denote the sequence of

6 dynamic collocation networks indexed by day t , as $\{G_t(A_t, B_t)\}_{t=0}^T$. A_t is the set of vertices,

7 i.e. individuals on campus, and B_t is the set of edges. The universe set of the population

8 throughout the simulation time period is given by $M = \bigcup_{i=1}^T A_t$. For convenience, we use

9 $a_i \in M$ to index every person in the universe population set.

10 The SEIR model consists of seven compartments. Each of these corresponds to a function

11 of population subsets with respect to day t : *susceptible* $S(t)$, *exposed* $E(t)$, *asymptomatic*

12 $Asym(t)$, *symptomatic* $Sym(t)$, *isolation* $I(t)$, *recovered* $R(t)$, and *dead* $D(t)$. For example,

13 $a_i \in I(t)$ means a_i is in the *isolation* state at day t . We use $N_{S \rightarrow E}^t$, $N_{E \rightarrow Asym}^t$, $N_{E \rightarrow Sym}^t$,

14 $N_{Asym \rightarrow R}^t$, $N_{Sym \rightarrow I}^t$, $N_{I \rightarrow R}^t$, and $N_{I \rightarrow D}^t$ to denote the transitions between states between day t

15 and day $t + 1$.

16 Model Initialization

The entire population M is fixed where $M = S(t) + E(t) + Asym(t) + Sym(t) + I(t) + R(t) + D(t)$ for all t . To capture the positivity out of the students coming back to campus at the start of the semester, we initialize the system by setting a subset of M into $Asym(0)$ and the

remainder into $S(0)$. The initial percentage of *asymptomatic* is described by:

$$Asym(0) \sim Binomial(M, I_0)$$

$$S(0) \sim M - Asym(0)$$

1 where I_0 is a parameter defined as the initial percentage of *Asymptomatic* at day $t = 0$.

2 New exposures

3 We consider two ways that an individual in the ABM could be exposed: (i) exposures
4 that occur due to contacts among individuals captured by the mobility network (*internal*
5 *transmission*) and (ii) exposures that occur due to contacts that occur outside of the mobility
6 network (*external transmission*).

7 Internal transmissions happen exclusively among individuals in the model. On any given
8 day, an edge becomes effective, when one of the *susceptible* individual comes in contact with
9 the other which is infectious, i.e. *asymptomatic* or *symptomatic*, individual. Therefore, for
10 every effective edge between two such people, the probability of the susceptible individual
11 getting *exposed* is described by the transmission probability p , which is another model pa-
12 rameter. The probability for an susceptible individual a_i entering *exposed* at the end of day
13 t is given by the following function:

14

$$f_p(a_i, t, p) = \begin{cases} 1 - (1 - p)^{e(t, a_i)}, & \text{if } a_i \in V_t \\ 0, & \text{otherwise} \end{cases}$$

15 Here, $e(t, a_i)$ is the number of effective edges of individual a_i at time t . Since $(1 - p)^{e(t, a_i)}$
16 is the probability that a_i does not contracted the disease at time t under $e(t, a_i)$ Bernoulli
17 trials, $1 - (1 - p)^{e(t, a_i)}$ is the probability that at least one effective edge leading a_i to *exposed*.

18 In addition to exposure due to internal transmission, we also consider new exposure due
19 to external transmission. We consider external transmission to be exposure resulting from
20 the physical collocations outside the scope of mobility network. For instance, the WIMOB
21 does not capture the connections between individuals without access to the campus WiFi or
22 someone contacting infectious persons outside the campus. To reflect this risk in our model,
23 for any day t , $I_{out}(t)$ describes the probability of infection on day t from a collocation that is
24 external to the mobility network. We assume that the probability an individual is infected
25 due to an external source is proportional to the number of cases in the broader community.
26 Therefore, we model the probability of external infection as a function of confirmed cases
27 in Fulton county, where GT is located [51]. C_t represents the confirmed cases reported by
28 Fulton County where C_{max} is the maximum number of the cases over the whole period,
29 $I_{out}(t)$ is given by

$$I_{out}(t) = \alpha * \frac{C_t}{C_{max}} \quad (1)$$

1 where α is a parameter scaling the normalized confirm cases in the surrounding county. The
 2 resulting number of external infections on day t is then modeled to be are Binomial with
 3 $|S(t)|$ trials with probability of success $I_{out}(t)$.

In summary, for every day $t > 0$, the overall number of individuals that become newly
 exposed is represented as $N_{S \rightarrow E}^t$ which is the result of both external and internal transmis-
 sions.

$$4 \quad N_{S \rightarrow E}^t \sim \underbrace{Binomial(|S(t)|, I_{out}(t))}_{\text{external infections}} + \underbrace{\sum_{a_i \in M} f_p(a_i, t, p)}_{\text{internal transmissions}}$$

5 Model dynamics after exposure

6 After exposure, individuals in the model will progress through other disease states in our
 7 model. We update the number of individuals in each state daily to reflect transitions between
 8 them. The transitions between the states on day t are summarized according to the following
 9 equations:

$$10 \quad \begin{aligned} S(t+1) - S(t) &= - N_{S \rightarrow E}^t \\ E(t+1) - E(t) &= N_{S \rightarrow E}^t - N_{E \rightarrow Asym}^t - N_{E \rightarrow Sym}^t \\ Asym(t+1) - Asym(t) &= N_{E \rightarrow Asym}^t - N_{Asym \rightarrow R}^t \\ Sym(t+1) - Sym(t) &= N_{E \rightarrow Sym}^t - N_{Sym \rightarrow I}^t \\ I(t+1) - I(t) &= N_{Sym \rightarrow I}^t - N_{I \rightarrow D} - N_{I \rightarrow R} \\ R(t+1) - R(t) &= N_{I \rightarrow R} \\ 11 \quad D(t+1) - D(t) &= N_{I \rightarrow D} \end{aligned}$$

After an individual has been exposed, they will spend Δ_S days in an incubation period. At
 day Δ_S after their exposure, individuals will become a *symptomatic* infection with probability
 p_S . Otherwise the agent will become an *asymptomatic* infection This process is given by the
 following two equations:

$$12 \quad N_{E \rightarrow Sym}^t \sim \begin{cases} Binomial(|E(t - \Delta_S)|, p_S), & t \geq \Delta_S \\ 0, & \text{otherwise} \end{cases}$$

$$N_{E \rightarrow \text{Asym}}^t \sim \begin{cases} |E(t - \Delta_S)| - N_{E \rightarrow \text{Sym}}^t, & t \geq \Delta_S \\ 0, & \text{otherwise} \end{cases}$$

Individuals who enter the *asymptomatic* state will recover after $\Delta_{\text{Asym} \rightarrow R}$ days since they were first *exposed*. Thus, we represent the number of transitions from *asymptomatic* to *recovered* on day t as:

$$N_{\text{Asym} \rightarrow R}^t \sim \begin{cases} N_{E \rightarrow \text{Asym}}^{t - \Delta_{\text{Asym} \rightarrow R}}, & t \geq \Delta_{\text{Asym} \rightarrow R} \\ 0, & \text{otherwise} \end{cases}$$

On the other hand, individuals who enter the *symptomatic* will eventually enter the *isolation* state [36]. The time that individuals spend in the *symptomatic* state before entering the *isolated* state is normally distributed $\delta_I^t \sim \text{Normal}(\Delta_I, \sigma_I^2)$. We simulate each individual's transition between *symptomatic* and *isolated* by using a sampling function $\Gamma(a_i, t, \Delta_t)$ and a function $\tau(a_i, t)$ that returns the days since *exposed* respectively:

$$\Gamma(a_i, t, \delta_I^t) = \begin{cases} 1, & t - \tau(a_i, t) \geq \delta_I^t \\ 0, & \text{otherwise} \end{cases}$$

$$\tau(a_i, t) = \begin{cases} \text{first day of } a_i \text{ entering } \textit{exposed}, & a_i \in \textit{Sym}(t) \\ +\infty, & \text{otherwise} \end{cases}$$

The aggregated transitions $N_{\text{Sym} \rightarrow I}^t$ between *symptomatic* and *isolated* is the sum of the distribution above on each day t .

$$N_{\text{Sym} \rightarrow I}^t \sim \sum_{a_i \in M} \Gamma(a_i, t, \delta_I^t)$$

Individuals who enter the *isolated* state may end up with one of two states: *dead* or *recovered*. We defined $N_{I \rightarrow D}^t$ as following another binomial distribution with parameter p_D :

$$N_{I \rightarrow D}^t \sim \text{Binomial}(|I(t)|, p_D)$$

The transitions between *isolation* and *recovered* is quite similar to the transitions between *symptomatic* and *isolation* except $\delta_R^t \sim \text{Normal}(\Delta_R, \sigma_R^2)$ where Δ_R and σ_R are the two parameters standing for the mean and standard deviation of days for an individual in the *isolation* state entering *recovered* since the first day of infection. This leads to:

$$N_{I \rightarrow R}^t \sim \sum_{a_i \in M} \Gamma(a_i, t, \delta_R^t).$$

Table S1: Model Parameters of the ABM

Parameter	Definition	Value	Std	Source
p	Transmission probability: For any edge between a <i>susceptible</i> and <i>infectious</i> individual in the contact network, p is the probability that the <i>susceptible</i> person will enter into the <i>exposed</i> state. This only dictates internal transmission	0.034	0.007	Calibration
α	Scaling factor of the normalized confirmed cases in the surrounding county (1). This is the parameter for us to generate $I_{out}(t)$	0.032	0.0032	Calibration
I_0	Proportion of population that is <i>asymptomatic</i> at day 0	0.012	0.0009	Calibration
p_S	Probability of <i>exposed</i> persons becoming symptomatic	0.66	-	[36]
Δ_S	Incubation period (days) since the first day of exposure	5	-	[36]
$\Delta_{Asym \rightarrow R}$	Asymptomatic duration (days); it is the time taken for an <i>asymptomatic</i> person to recover since the first day of exposure	7	-	[36]
Δ_I, σ_I	Time of an <i>symptomatic</i> entering <i>isolated</i> since the first day of exposure of a <i>symptomatic</i> person	8	2	[27]
Δ_R, σ_R	Time for recovery for a <i>symptomatic</i> , since the first day of exposure	12	2	[42]
p_D	Death rate under isolation	0.0006	-	[42]

The variables p , α , and I_0 are estimated by calibrating the simulation model on the first 5 weeks of positivity rates provided by GT surveillance for Fall 2020, while incorporating external cases from Fulton County. These parameters were found by validating the ABM on the remaining weeks of Fall 2020. [Figure S3](#) shows model estimate during the calibration and validation period.

1 Model calibration

Most of our model parameters can be estimated from previous studies (see [Table S1](#)). However, three parameters in our study are not easily estimated from previous studies: (i) the proportion of the agents that begin the semester asymptotically infected, I_0 , (ii) the probability of transmission between a given infectious individual and susceptible individual given a contact in the mobility network, p , and (iii) the scaling factor α used to determine probability of transmission due to contact outside of WIMOB network on day t , $I_{out}(t)$ (see [\(1\)](#)). We fit these three parameters to the published weekly positivity rate (percentage of asymptomatic cases) as reported by GT’s asymptomatic surveillance testing program [\[52\]](#). To fit the parameters, we performed calibration to minimize the root mean square of error (r.m.s.e) between the simulation estimates of the weekly positivity rate and the observed weekly positivity rate on GT’s campus of the Fall 2020 semester as reported by the surveillance testing program.

To perform the calibration, we used two sets of public data pertaining to 2020 Fall semester at GT: (i) the confirmed cases in Fulton County [\[51\]](#), and (ii) the aggregated surveillance test positivity rate for each week [\[52\]](#). The former helps estimate the daily external infection percentage. The latter is the ground truth trajectory we fit our model on. We consider the data aggregated by week because each individual on campus can only get tested once per week. The positivity rate provided by the surveillance testing data can be interpreted as the estimated percentage of new *asymptomatic* cases out of the total testable population which includes *susceptible*, *exposed*, and *asymptomatic* — with an assumption that every testable population get tested at the same rate.

To formalize the calibration problem, let R_w be the surveillance-testing aggregated result at week w . Let $S(I_0, \alpha, p, w)$ be the function of the simulation model which returns the percentage of new *asymptomatic* in week w out of the total testable population. For every combination of parameters, the predicted result for each week w is estimated by taking the average of N simulation outputs. The objective function is:

$$f(I_0, \alpha, p) = \sqrt{\frac{1}{W} \sum_{w=1}^W \left(\frac{\sum_{i=1}^N S(I_0 \alpha, p, w)}{N} - R_w \right)^2}$$

The optimization problem is:

$$\min_{I_0, \alpha, p} f(I_0, \alpha, p)$$

1 We fit our model to the first 5 weeks of Fall 2020 and validate the results on the remaining
2 weeks. After obtaining the optimal set of parameters, for robust comparison of policies with
3 different viral variants, we generate a range of parameters by compromising the r.m.s.e within
4 40% of the minima [11]. First, we implement the Nelder Mead method [44] to discover
5 the optimal set of parameters that minimizes the r.m.s.e. Next, we sample 40 different
6 combinations of parameters within 40% of the minimum r.m.s.e to estimate the means and
7 standard deviations of these parameters (Table S1). Throughout this paper, we pool together
8 all simulation results across those parameters over multiple runs ($N = 15$) and report the
9 2.5th and 97.5th percentiles of the simulation outputs for every policy experiment.

10 Sensitivity Analyses

11 In this section, we design complementary experiments to inspect the robustness LC policies
12 under different setups and calibration approaches. These variations are defined as follows:

- 13 • *Calibration periods (V1)*: For the results in the main paper, we discuss results with
14 our ABM calibrated on the first 5 weeks of surveillance testing data. For additional
15 analyses, the model parameters are re-estimated based on the surveillance data from
16 week 5–9 and 10–14 in Fall 2020 at GT. The calibration is validated on the remaining
17 weeks in the semester. Figure S3 shows the calibration and validation. The results
18 of policy comparison with these variations can be found in Table S8 and Table S9,
19 for weeks 5–9 and 10–14 respectively. Additionally, Figure S9 shows boxplots to
20 compare the distributions of different policies, while Figure S15 and Figure S16 show
21 cumulative plots of the disease control outcomes, for weeks 5–9 and 10–14 respectively.
22
- 23 • *Campuses and counties (V2)*: For the results in the main paper, the calibration of
24 our ABM reflects certain latent factors inherent to GT that could affect both mobility
25 behavior as well as testing results. To complement this we consider calibrating our
26 data under different settings informed by surveillance testing from other similar large
27 universities. This analysis is intended to represent the GT community in a different
28 geographic setting, which is influenced by a different surrounding community, policies
29 and resources. The new parameters are estimated based on the first 5 weeks of surveil-
30 lance testing from the University of Illinois at Urbana-Champaign (UIUC) and the
31 University of California, Berkeley (Berkeley) [50, 68], and the corresponding county
32 data [10, 9] The calibration is validated on the remaining weeks in the semester.
33 Figure S4 and Figure S5 show the calibration and validation for UIUC and Berkeley
34 respectively. The results of policy comparison with these variations can be found in
35 Table S10 and Table S11. Additionally, Figure S10 shows boxplots to compare the

1 distributions of different policies, while [Figure S17](#) and [Figure S18](#) show cumulative
2 plots of the disease control outcomes.

3
4 The estimated parameters with these calibration variations are described in [Table S3](#).
5 Both RI and LC are evaluated in the same infection reduction metrics and burden metrics
6 again under behavioral scenarios S1, S2, and S3. Since the budgets are structural (mobility,
7 and exposure risk) the LC policies are unchanged among the variants. Moreover, since the
8 burden metrics are structural, those results are invariant.

9 **Supplementary Discussion**

10 **Implications for Policy Design**

11 To evaluate the efficacy of policies, we inspect infection reduction by simulating the disease
12 with contact networks from Fall 2019. Since managed WiFi networks accumulate logs for
13 long periods of time, policymakers can use WIMOB to model data from previous semesters
14 and experiment with closure policies like LC. We show that WIMOB can provide retrospective
15 disease-mitigating insight into multiple counterfactual behavioral scenarios. For instance,
16 policymakers can consider studying seasonal behaviors over multiple semesters for more ro-
17 bustness. Since the underlying data is longitudinal, it provides the flexibility to realistically
18 assess policy interventions at different time points and also study updating policies. Re-
19 stricting movement on campus at different time-points is known to exert varying degrees of
20 control on disease spread [11]. Our data also shows that mobility on campus varies across
21 the semester and therefore, allows policymakers to consider loosening shutdowns depending
22 on the phase of the semester.

23 Policy design is determined by practical budgets. We model two kinds of budgets, mo-
24 bility reduction and risk of exposure. The former represents disruptions in space utilization,
25 availing services, and social life. The latter translates to the testing burden on campus. Our
26 analysis determines the budget in different behavioral scenarios by observing the changes
27 to the graph when large classes are moved online. This is to ensure an equitable com-
28 parison with targeted policies. However, in real situations, these budgets can be relaxed
29 or restricted based on that campus' preparedness to tackle a pandemic. For instance, a
30 hypothetical campus that can test everyone every day might not be constrained by risk of
31 exposure. Alternatively, policymakers can model other tangible budgets such as the capacity
32 in isolation wards or available hospital beds. This can be informed by practical limitations of
33 the campus. Similarly, this paper only assesses limited forms of cost, e.g., students avoiding
34 campus or closing locations. From a financial perspective, university campuses can digitize
35 their core service—education—but still realize losses from other curtailed services [21, 7, 71].
36 When students avoid campus it can lead to direct losses from meal passes and parking and
37 also quantifiable losses to learning outcomes [2, 18] Policymakers can compute actual costs
38 by complementing this data with information from other sources (e.g., revenue generated
39 by cafes and stores on campus). This can help qualifying WIMOB to reflect different costs
40 and in turn help design policies that optimize for financial losses. Different campuses have
41 different priorities and challenges in implementing policies.

1 Privacy, Ethics and Legal Considerations

2 We purposefully compare our prototype targeted policies against moving classes online
3 because of practical budgets within the university. Both the WiMOB and EN based contact
4 networks are derived from archival data accumulated by universities. This does not require
5 instrumenting campus or its community with any new form of surveillance infrastructure.
6 However, its use for a different purpose demands approval by an IRB. Moreover, acquiring
7 these kinds of data would require collaborating with data-stewards (e.g., the IT department)
8 to establish a data-use agreement. This document must clarify how the data will be de-
9 identified, transferred, and stored.

10 For this form of data, the critical privacy challenge might not be localization itself, but
11 rather the aggregation of data over a period of time [69]. Data spanning a longer period are
12 more susceptible to cross-analyzing and identifying. To mitigate over-accumulation of data,
13 we suggest an adherence to principles of data minimization [31]. Instead of storing entire
14 mobility graphs, the campus can compute and preserve only high-level insights, such as the
15 importance of locations. This redacts any underlying individual behavior and corresponding
16 identifiable information. Actually, for future purposes campuses can consider a form of
17 differential privacy that authorizes limited forms of data querying depending on the privileges
18 of the stakeholder [4].

19 An operational application would require the university to update the terms of use for
20 its managed network. Particularly, the university should disclose how this data can be used
21 in critical circumstances that invoke shared vulnerabilities [6]. On notifying the campus
22 community of this change it offers individuals the choice to refrain from using the university
23 network. Prior work on a sample within the same university campus shows that 90% of
24 students are connected to the network on any given day [15]. Therefore, proposing such
25 an opt-out condition can be viewed as an unfair choice. As a result, the campus needs to
26 develop a contingency plan to accommodate network access to users who do not want their
27 mobility behavior to constitute the aggregated insights.

28 Limitations and Future Work

29 This work presents evidence that university campuses can repurpose existing data sources
30 to inform the design of LC policies that can control COVID-19. We evaluate these policies
31 as alternatives to other data-driven, but, broad impact policies that universities consider
32 implementing, such as moving large classes online. One of the drawbacks of this analysis,
33 however, is that it assumes all edges to be the same. For example, when constraining by
34 mobility, in real scenarios losing certain visits might be more valuable than others. Decline in
35 mobility around profit-making services, such as shops and cafeterias, versus losing mobility at
36 common rooms have a different tangible effects on campus. Currently, we take an agnostic
37 stance towards the mobility behavior, where all visits at all locations are the same. In
38 reality, implementing policies could have inequitable qualitative impacts despite appearing
39 to have a similar network configuration. This can be improved by embedding more qualitative
40 information into the network and conceiving ingenious ways to associate costs to edges.

41 Similar to the assumption that all visits and locations, the current work also assumes
42 all people to be equal. However, different people have different underlying conditions that

1 can make their vulnerabilities more concerning [55]. The privacy safeguards of this study
2 restricted the research team from acquiring any additional demographic or historical in-
3 formation. Further work can attempt to characterize the nodes by randomly seeding the
4 network to reflect the approximate demographic break up of the community. Alternatively,
5 researchers could try to estimate some demographic based on behavior as well. However,
6 to leverage accurate individual information, even for operational use during a public health
7 emergency, policymakers and researchers need to develop new privacy protocols [24].

8 Lastly, this paper only studies three rudimentary behavioral scenarios, *persistence*, *non-*
9 *residential avoidance*, *complete avoidance*. Yet, other substitution behaviors are possible
10 and the richness of networks leveraged with WIMOB enables the exploration of various new
11 scenarios that can be triggered by policy interventions on campus. For instance, individuals
12 might not even visit transitory spaces, such as lobbies or cafes between classes. Certain
13 collocations could be the consequence of social ties which might never be developed because
14 of a shutdown (e.g., project teams meeting outside of class). Further research can illuminate
15 the effects of policies in more specific scenarios by modeling post-intervention behavior more
16 accurately.

It is made available under a [CC-BY 4.0 International license](https://creativecommons.org/licenses/by/4.0/).

Table S2: Comparison of Contact Network Structure (Fall 2019)

	Cornell				Georgia Tech		
Contact Network	EN		EN		WiMOB		
Contact Situations	Course Lectures	RI	Course Lectures	RI	All Spaces	Course Lectures	RI
Number of Active Nodes	22051		21299		15379(± 3353)	15379(± 3353)	15380(± 3353)
Average Contacts	529	22 – 41	341	30	152(± 63)	86(± 35)	86(± 34)
Density	0.024	0.001	0.016	0.001	0.009(± 0.002)	0.005(± 0.001)	0.0053(± 0.0014)
Largest Connected Component(%)	0.991	0.763	0.994	0.627	0.999(± 0.001)	0.999(± 0.02)	0.978(± 0.025)
Average Shortest Path	2.47	3.75	2.54	3.54	2.67(± 0.28)	3.26(± 0.5)	2.953(± 0.35)

We create a contact network of only students with WiMOB and compare it with insights from contact networks created with EN. On average, we find the contact network constructed with WiMOB shows fewer average contacts, lower density and higher average shortest path (between reachable paths). Moreover, within WiMOB itself, characterizing all spaces reveals more contacts and shorter paths than only focusing on contacts in lectures. While the proportion of the largest component appears similar, note that with WiMOB, on average about only 70% of the students visit campus on a given week. We further inspect the disease-mitigating structural changes of the RI policy on the network. We observe that the changes across all metrics with EN appear to be more drastic than compared to WiMOB.

Table S3: Calibration outcomes with variations

	Calibrating on Positivity Rate at GT			Calibrating on Positivity Rate with other University Behavior	
Parameter	weeks 0 – 4	weeks 5 – 9	weeks 10 – 14	UIUC	Berkeley
p	0.034 ± 0.007	0.073 ± 0.005	0.0024 ± 0.0003	0.024 ± 0.0009	0.041 ± 0.003
α	0.032 ± 0.0032	0.0042 ± 0.0006	0.0159 ± 0.002	0.0069 ± 0.0013	0.038 ± 0.006
I_0	0.012 ± 0.0009	0.00057 ± 0.00007	0.0030 ± 0.0007	0.0039 ± 0.0013	0.0048 ± 0.0003
Optimal r.m.s.e	0.0034	0.0007	0.0015	0.0028	0.0031
Effective R_0 (min - max), Fall 2020	1.15 – 1.18	1.17 – 2.14	0.33 – 0.95	1.12 – 1.19	1.24 – 1.28
Effective R_0 (min - max), Fall 2019	2.87 – 5.68	5.15 – 12.93	1.27 – 1.36	3.35 – 5.35	3.32 – 7.00

The results in the main paper use variables p , α , and I_0 as estimated by calibrating the simulation model on the first 5 weeks of positivity rates provided by GT surveillance for Fall 2020, while incorporating external cases from Fulton County. For sensitivity analyses, we perform calibrations on GT data for weeks 5 – 9 and 10 – 14. Additionally, we perform calibrations on first five weeks of UIUC and Berkeley positivity rate (along with data from their respective county). These parameters were found by validating the ABM on the remaining weeks of Fall 2020. To assess the basic reproductive number (R_0) of our ABM we study the first 4 weeks of the disease. We find the effective R_0 to be higher for Fall 2019 than Fall 2020 as the mobility behaviors between the 2 semesters was vastly different. Note, Fall 2020 exhibits only 39% of the mobility we observe in Fall 2019. In fact, the ABM is calibrated on Fall 2020, where behavior was subject to pandemic related closures, but in Fall 2019 the mobility was not hindered by any interventions. Thus, Fall 2019 reflects a counterfactual of Fall 2020 without any closures.

It is made available under a [CC-BY 4.0 International license](https://creativecommons.org/licenses/by/4.0/) .

Table S4: Comparison of different LC_{PRank} policies in terms of controlling the disease and impacts on campus in Fall 2019; calibrated from week 0 – 4 in Fall 2020 at GT

Behavioral Scenario	S1: Persistence			S2: Non-Res Avoidance			S3: Complete Avoidance		
Policy	RI	LC		RI	LC		RI	LC	
Budget	-	Mobility (95.5%)	Exposure Risk (18800)	-	Mobility (92.3%)	Exposure Risk (16900)	-	Mobility (69.2%)	Exposure Risk (12700)
Infection Reduction Outcomes									
Peak Infections (%)	25.34(±12)	36.92(±14)**	34.30(±13)**	35.44(±10)	49.33(±11)**	52.19(±10)**	61.62(±7)	69.34(±5)**	64.44(±6)**
Total Infections (%)	6.99(±5)	10.63(±6)**	8.19(±5)**	14.88(±4)	13.96(±6)*	15.67(±6)	33.00(±5)	33.4(±5)	26.94(±5)**
Internal Transmissions (%)	17.13(±9)	22.62(±11)**	21.01(±11)**	27.58(±8)	35.35(±12)**	39.20(±11)**	54.00(±8)	70.89(±7)**	60.90(±9)**
Burdens on Campus									
Locations Affected	58	18	19	58	38	50	58	192	124
Students Avoiding (%)	0	0	0	9.30	0.20	0.45	27.21	12.45	6.57
Completely Isolated on Campus (%)	5.42	8.40	8.40	5.95	5.72	5.71	7.09	5.18	5.23

Note that this table is the same as [Table 1](#). We repeat the results here for easier comparison of LC_{PRank} to other algorithms shown in [Table S5](#), [Table S6](#) and [Table S7](#). Within each behavioral scenario, we perform the Kruskal-Wallis H-Test [40] to compare outcomes of LC_{PRank} with RI.

We find that LC_{PRank} leads to significantly improved peak infection reduction and internal transmission. In terms of reduction in total infections, the outcomes are comparable in general but can vary by specific scenarios. In addition, every policy also exerts some burden on campus, either in terms of locations affected, students avoiding campus or isolation. We observe that LC_{PRank} policies focus on fewer locations (except in S3). Moreover, these policies affect fewer student's schedules and therefore fewer people avoid campus due to completely remote schedules. Finally, LC_{PRank} does not increase the percentage of people completely isolated on campus (p -value: < 0.01 *, < 0.001 **).

Table S5: Comparison of different LC_{BCen} policies in terms of controlling the disease and impacts on campus in Fall 2019; calibrated from week 0 – 4 in Fall 2020 at GT

Behavioral Scenario	S1: Persistence			S2: Non-Res Avoidance			S3: Complete Avoidance		
Policy	RI	LC_{BCen}		RI	LC_{BCen}		RI	LC_{BCen}	
Budget	-	Mobility (95.5%)	Exposure Risk (18800)	-	Mobility (92.3%)	Exposure Risk (16900)	-	Mobility (69.2%)	Exposure Risk (12700)
Infection Reduction Outcomes									
Peak Infections (%)	25.34(±12)	19.14(±12)**	30.93(±13)**	35.44(±10)	30.79(±13)**	51.87(±10)**	61.62(±7)	65.07(±6)**	61.38(±7)
Total Infections (%)	6.99(±5)	4.85(±4)**	7.74(±5)	14.88(±4)	7.76(±5)**	15.30(±6)	33.00(±5)	25.32(±5)**	22.08(±6)**
Internal Transmissions (%)	17.13(±9)	11.96(±9)**	19.64(±10)**	27.58(±8)	19.63(±10)**	38.74(±11)**	54.00(±8)	63.29(±8)**	54.00(±8)
Burdens on Campus									
Locations Affected	58	18	19	58	38	50	58	192	124
Students Avoiding (%)	0	0	0	9.30	0.07	0.45	27.21	11.47	6.74
Completely Isolated on Campus (%)	5.42	8.63	8.63	5.95	5.49	5.47	7.09	5.15	5.19

Within each behavioral scenario, we perform the Kruskal-Wallis H-Test [40] to compare outcomes of LC_{BCen} with RI. We find that LC_{BCen} leads to significantly improved peak infection reduction and internal transmission, when designed with the exposure risk budget, but can be worse with the mobility budget. In terms of reduction in total infections, the outcomes are typically worse. In addition, every policy also exerts some burden on campus, either in terms of locations affected, students avoiding campus or isolation. We observe that LC_{BCen} policies focus on fewer locations (except in S3). Moreover, these policies affect fewer student's schedules and therefore fewer people avoid campus due to completely remote schedules. Finally, LC_{BCen} does not increase the percentage of people completely isolated on campus (p -value: < 0.01 *, < 0.001 **).

It is made available under a [CC-BY 4.0 International license](https://creativecommons.org/licenses/by/4.0/) .

Table S6: Comparison of different LC_{ECen} policies in terms of controlling the disease and impacts on campus in Fall 2019; calibrated from week 0 – 4 in Fall 2020 at GT

Behavioral Scenario	S1: Persistence			S2: Non-Res Avoidance			S3: Complete Avoidance		
Policy	RI	LC_{ECen}		RI	LC_{ECen}		RI	LC_{ECen}	
Budget	-	Mobility (95.5%)	Exposure Risk (18800)	-	Mobility (92.3%)	Exposure Risk (16900)	-	Mobility (69.2%)	Exposure Risk (12700)
Infection Reduction Outcomes									
Peak Infections (%)	25.34(±12)	36.15(±13)**	36.13(±13)**	35.44(±10)	44.52(±12)**	51.33(±10)**	61.62(±7)	65.13(±6)**	62.15(±7)
Total Infections (%)	6.99(±5)	8.66(±6)**	8.69(±6)**	14.88(±4)	11.75(±6)**	14.96(±6)	33.00(±5)	25.39(±5)**	22.82(±6)**
Internal Transmissions (%)	17.13(±9)	22.33(±11)**	22.37(±11)**	27.58(±8)	29.95(±12)*	37.94(±11)**	54.00(±8)	63.56(±8)**	57.07(±10)**
Burdens on Campus									
Locations Affected	58	18	19	58	38	50	58	192	124
Students Avoiding (%)	0	0	0	9.30	0.20	0.55	27.21	13.11	6.96
Completely Isolated on Campus (%)	5.42	8.59	8.59	5.95	5.53	5.51	7.09	5.17	5.23

Within each behavioral scenario, we perform the Kruskal-Wallis H-Test [40] to compare outcomes of LC_{ECen} with RI. We find that LC_{ECen} leads to significantly improved peak infection reduction and internal transmission. In terms of reduction in total infections, the outcomes vary by specific scenarios. In addition, every policy also exerts some burden on campus, either in terms of locations affected, students avoiding campus or isolation. We observe that LC_{ECen} policies focus on fewer locations (except in S3). Moreover, these policies affect fewer student’s schedules and therefore fewer people avoid campus due to completely remote schedules. Finally, LC_{ECen} does not increase the percentage of people completely isolated on campus (p -value: < 0.01 :*, < 0.001 :**).

Table S7: Comparison of different LC_{LCen} policies in terms of controlling the disease and impacts on campus in Fall 2019; calibrated from week 0 – 4 in Fall 2020 at GT

Behavioral Scenario	S1: Persistence			S2: Non-Res Avoidance			S3: Complete Avoidance		
Policy	RI	LC_{LCen}		RI	LC_{LCen}		RI	LC_{LCen}	
Budget	-	Mobility (95.5%)	Exposure Risk (18800)	-	Mobility (92.3%)	Exposure Risk (16900)	-	Mobility (69.2%)	Exposure Risk (12700)
Infection Reduction Outcomes									
Peak Infections (%)	25.34(±12)	22.42(±13)**	30.73(±13)**	35.44(±10)	32.85(±13)*	51.44(±10)**	61.62(±7)	65.01(±6)**	61.40(±7)
Total Infections (%)	6.99(±5)	5.48(±5)**	7.64(±5)	14.88(±4)	8.23(±5)**	15.03(±6)	33.00(±5)	25.33(±5)**	21.98(±6)**
Internal Transmissions (%)	17.13(±9)	13.79(±9)**	19.37(±10)**	27.58(±8)	20.86(±11)**	38.08(±11)**	54.00(±8)	63.28(±8)**	55.28(±9)
Burdens on Campus									
Locations Affected	58	18	19	58	38	50	58	192	124
Students Avoiding (%)	0	0	0	9.30	0.07	0.43	27.21	11.47	6.73
Completely Isolated on Campus (%)	5.42	8.63	8.63	5.95	5.49	5.47	7.09	5.15	5.20

Within each behavioral scenario, we perform the Kruskal-Wallis H-Test [40] to compare outcomes of LC_{LCen} with RI. We find that LC_{LCen} leads to significantly improved peak infection reduction and internal transmission. In terms of reduction in total infections, the outcomes are comparable in some scenarios but can vary in specific scenarios. In addition, every policy also exerts some burden on campus, either in terms of locations affected, students avoiding campus or isolation. We observe that LC_{LCen} policies focus on fewer locations (except in S3). Moreover, these policies affect fewer student’s schedules and therefore fewer people avoid campus due to completely remote schedules. Finally, LC_{LCen} does not increase the percentage of people completely isolated on campus (p -value: < 0.01 :*, < 0.001 :**).

Table S8: Comparison of different $LC_{P_{Rank}}$ policies in terms of controlling the disease and impacts on campus in Fall 2019; calibrated from week 5 – 9 in Fall 2020 at GT

Behavioral Scenario	S1: Persistence			S2: Non-Res Avoidance			S3: Complete Avoidance		
Policy	Broad	$LC_{P_{Rank}}$		RI	$LC_{P_{Rank}}$		RI	$LC_{P_{Rank}}$	
Budget	-	Mobility (95.5%)	Exposure Risk (18800)	-	Mobility (92.3%)	Exposure Risk (16900)	-	Mobility (69.2%)	Exposure Risk (12700)
Infection Reduction Outcomes									
Peak Infections (%)	20.10(±4)	25.60(±3)**	25.63(±3)**	31.25(±3)	42.32(±4)**	47.29(±4)**	62.35(±2)	88.87(±2)**	76.89(±3)**
Total Infections (%)	8.89(±2)	10.50(±3)**	9.70(±3)**	20.26(±2)	20.02(±3)	23.71(±4)**	46.72(±2)	67.92(±4)**	51.30(±4)**
Internal Transmissions (%)	9.97(±2)	11.51(±2)**	10.95(±2)**	21.84(±2)	22.51(±3)	26.64(±3)**	49.80(±2)	74.96(±3)**	56.89(±4)**

Within each behavioral scenario, we perform the Kruskal-Wallis H-Test [40] to compare outcomes of $LC_{P_{Rank}}$ with RI. We find that $LC_{P_{Rank}}$ leads to significantly improved peak infection reduction and internal transmission. In terms of reduction in total infections, the outcomes are better in general but can be comparable in specific scenarios. The burden exerted on campus is the same as structural impacts of $LC_{P_{Rank}}$ (Table S4). (p -value: < 0.01:*, < 0.001:**).

Table S9: Comparison of different $LC_{P_{Rank}}$ policies in terms of controlling the disease and impacts on campus in Fall 2019; calibrated from week 10 – 14 in Fall 2020 at GT

Behavioral Scenario	S1: Persistence			S2: Non-Res Avoidance			S3: Complete Avoidance		
Policy	Broad	$LC_{P_{Rank}}$		RI	$LC_{P_{Rank}}$		RI	$LC_{P_{Rank}}$	
Budget	-	Mobility (95.5%)	Exposure Risk (18800)	-	Mobility (92.3%)	Exposure Risk (16900)	-	Mobility (69.2%)	Exposure Risk (12700)
Infection Reduction Outcomes									
Peak Infections (%)	-1.75(±8)	3.65(±8)**	-1.95(±8)	3.88(±8)	-2.24(±8)**	-2.06(±8)**	20.39(±7)	7.57(±8)**	2.81(±8)**
Total Infections (%)	3.93(±9)	10.36(±8)**	5.13(±9)	9.87(±8)	6.36(±9)**	6.48(±9)**	26.02(±7)	16.37(±8)**	11.80(±8)**
Internal Transmissions (%)	42.33(±10)	61.15(±7)**	56.25(±8)**	49.83(±9)	67.10(±6)**	69.10(±6)**	74.74(±5)	84.80(±3)**	79.90(±4)**

Within each behavioral scenario, we perform the Kruskal-Wallis H-Test [40] to compare outcomes of $LC_{P_{Rank}}$ with RI. We find that $LC_{P_{Rank}}$ leads to significantly improved peak infection reduction and internal transmission. In terms of reduction in total infections, the outcomes are better in general but can be comparable in specific scenarios. The burden exerted on campus is the same as structural impacts of $LC_{P_{Rank}}$ (Table S4). (p -value: < 0.01:*, < 0.001:**).

Table S10: Comparison of different LC_{PRank} policies in terms of controlling the disease and impacts on campus in Fall 2019; calibrated from week 0 – 4 in Fall 2020 at UIUC

Behavioral Scenario	S1: Persistence			S2: Non-Res Avoidance			S3: Complete Avoidance		
Policy	Broad	LC_{PRank}		RI	LC_{PRank}		RI	LC_{PRank}	
Budget	-	Mobility (95.5%)	Exposure Risk (18800)	-	Mobility (92.3%)	Exposure Risk (16900)	-	Mobility (69.2%)	Exposure Risk (12700)
Infection Reduction Outcomes									
Peak Infections (%)	41.40(±3)	60.44(±2)**	59.52(±2)**	49.75(±2)	74.22(±2)**	76.44(±2)**	78.14(±1)	85.81(±1)**	83.71(±1)**
Total Infections (%)	18.46(±3)	27.12(±3)**	25.25(±3)**	27.09(±3)	38.00(±4)**	40.68(±4)**	51.97(±3)	59.93(±5)**	54.07(±5)**
Internal Transmissions (%)	28.22(±3)	40.93(±3)**	39.09(±3)**	37.89(±3)	58.47(±2)**	65.45(±2)**	68.04(±2)	86.45(±1)**	80.08(±1)**

Within each behavioral scenario, we perform the Kruskal-Wallis H-Test [40] to compare outcomes of LC_{PRank} with RI. We find that LC_{PRank} leads to significantly improved peak infection reduction, internal transmission and total infections. The burden exerted on campus is the same as structural impacts of LC_{PRank} (Table S4). (p -value: < 0.01:*, < 0.001:**).

Table S11: Comparison of different LC_{PRank} policies in terms of controlling the disease and impacts on campus in Fall 2019; calibrated from week 0 – 4 in Fall 2020 at UC Berkeley

Behavioral Scenario	S1: Persistence			S2: Non-Res Avoidance			S3: Complete Avoidance		
Policy	Broad	LC_{PRank}		RI	LC_{PRank}		RI	LC_{PRank}	
Budget	-	Mobility (95.5%)	Exposure Risk (18800)	-	Mobility (92.3%)	Exposure Risk (16900)	-	Mobility (69.2%)	Exposure Risk (12700)
Infection Reduction Outcomes									
Peak Infections (%)	29.13(±3)	36.46(±5)**	36.34(±5)**	38.83(±3)	54.95(±4)**	58.88(±4)**	66.69(±2)	78.18(±1)**	77.65(±2)**
Total Infections (%)	6.34(±3)	8.59(±3)**	7.28(±3)**	14.71(±3)	13.18(±4)**	14.83(±4)	33.86(±4)	33.98(±5)	27.10(±5)**
Internal Transmissions (%)	15.99(±3)	20.43(±4)**	19.17(±4)**	27.01(±3)	34.60(±4)**	38.78(±4)**	55.01(±2)	74.65(±2)**	63.57(±3)**

Within each behavioral scenario, we perform the Kruskal-Wallis H-Test [40] to compare outcomes of LC_{PRank} with RI. We find that LC_{PRank} leads to significantly improved peak infection reduction, internal transmission and total infections. The burden exerted on campus is the same as structural impacts of LC_{PRank} (Table S4). (p -value: < 0.01:*, < 0.001:**).

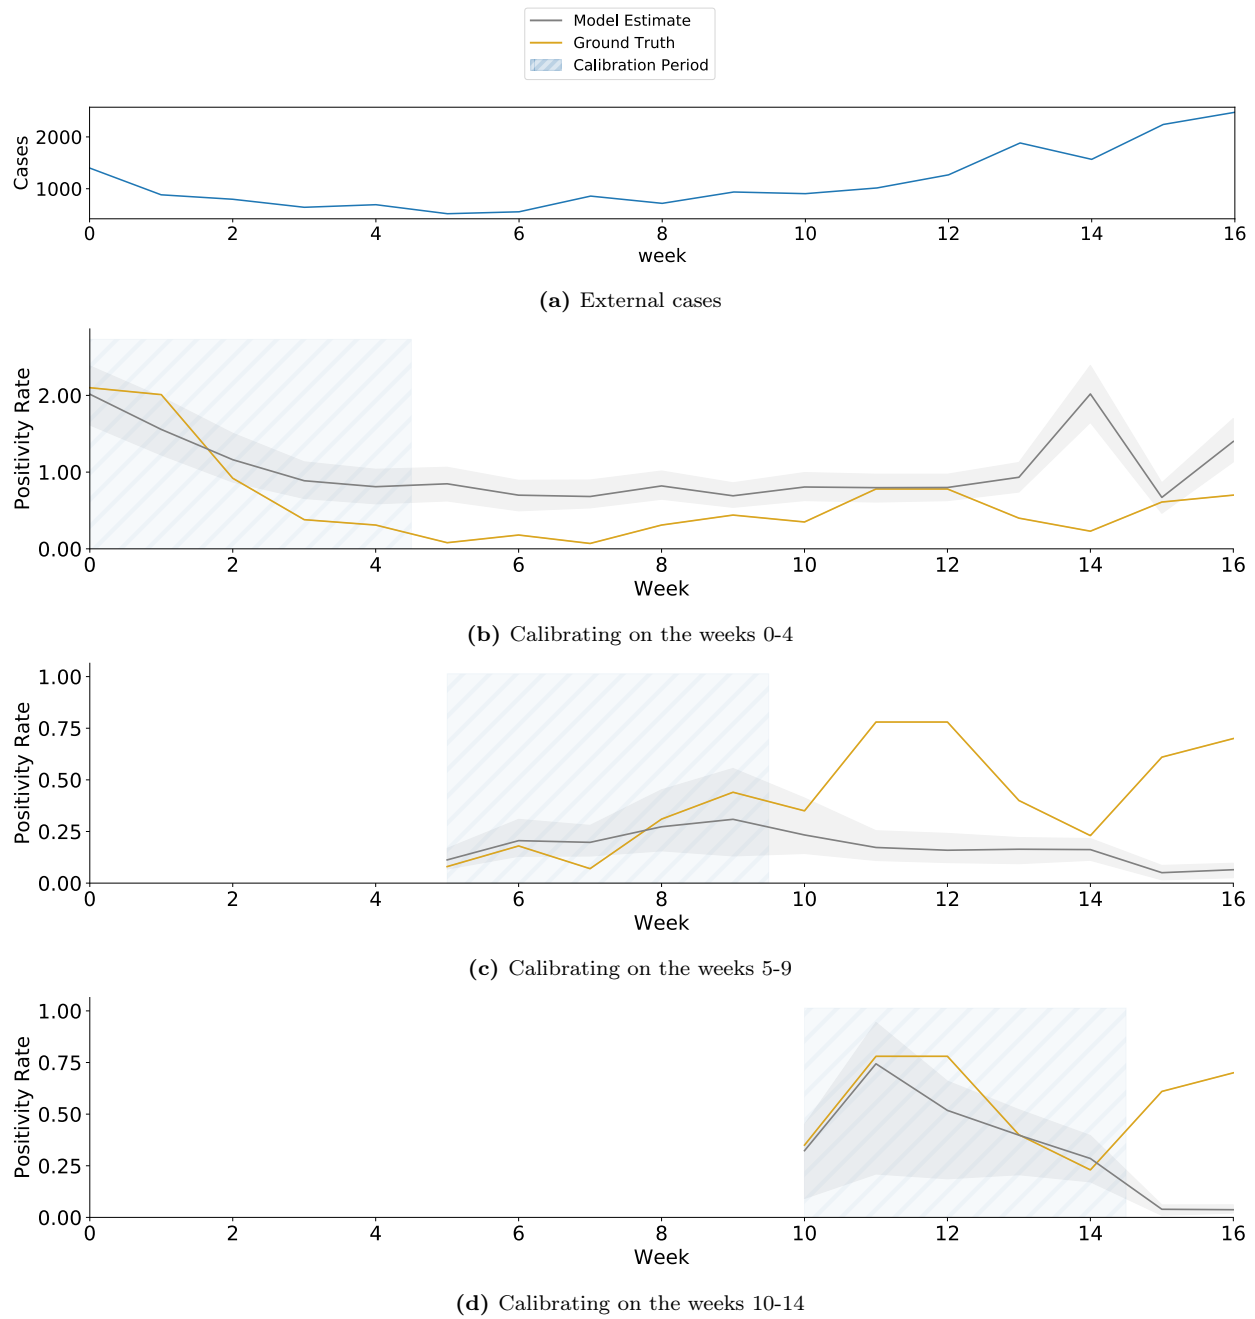


Figure S3: We calibrate ABM on positivity rates from Fall 2020 at GT. The objective function of the calibration is to minimize the r.m.s.e. with the weekly average of positivity rate obtained from surveillance testing results at GT [28]. (a) The parameter that determines external transmission of infections on a given day, $I_{out}(t)$, is a function of cases in Fulton county (where GT is located). (b) The models discussed in the main paper are calibrated using the first 5 weeks of data. We illustrate the output for a range of parameters that incorporate quantitative uncertainty, i.e., within 40% of the r.m.s.e. (c, d) illustrate calibration on the second period of 5 weeks and third period of 5 weeks respectively. These only show the optimal parameter output. The shaded region around the lines show the 2.5th and 97.5th percentile.

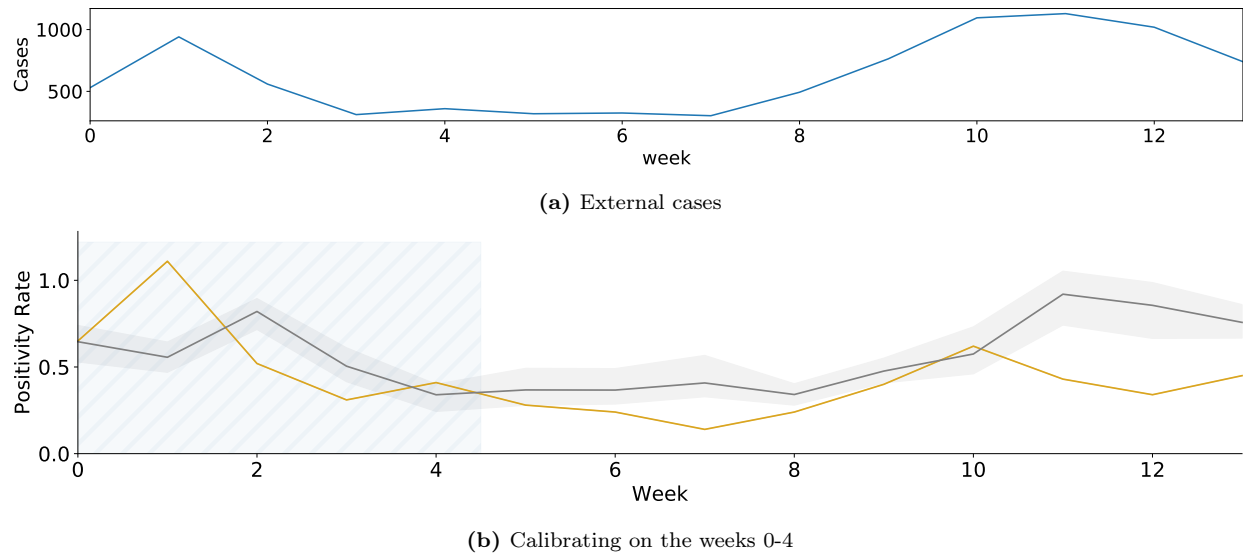


Figure S4: We calibrate ABM on positivity rates from first 5 weeks of Fall 2020 at UIUC. The objective function of the calibration is to minimize the r.m.s.e. with the weekly average of positivity rate obtained from surveillance testing results at GT [28]. (a) The parameter that determines external transmission of infections on a given day, $I_{out}(t)$, is a function of cases in Champaign county (where UIUC is located). (b) We illustrate the output for a range of parameters that incorporate quantitative uncertainty, i.e., within 40% of the r.m.s.e. The shaded region around the lines show the 2.5th and 97.5th percentile.

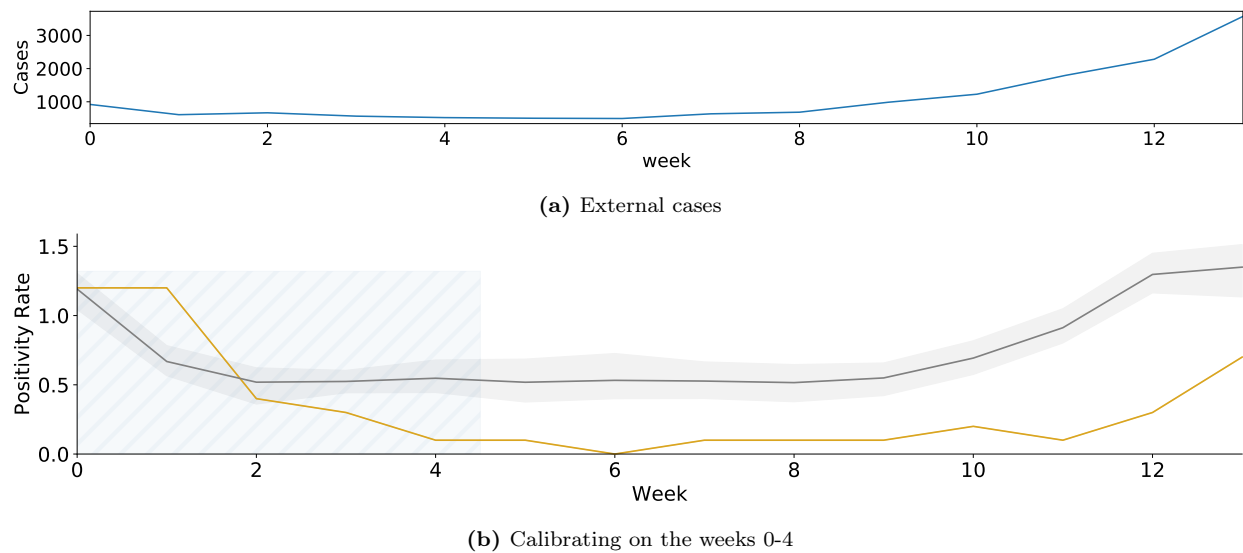


Figure S6: We calibrate ABM on positivity rates from first 5 weeks of Fall 2020 at UC Berkeley. The objective function of the calibration is to minimize the r.m.s.e. with the weekly average of positivity rate obtained from surveillance testing results at GT [28]. (a) The parameter that determines external transmission of infections on a given day, $I_{out}(t)$, is a function of cases in Alameda county (where UIUC is located). (b) We illustrate the output for a range of parameters that incorporate quantitative uncertainty, i.e., within 40% of the r.m.s.e. The shaded region around the lines show the 2.5th and 97.5th percentile.

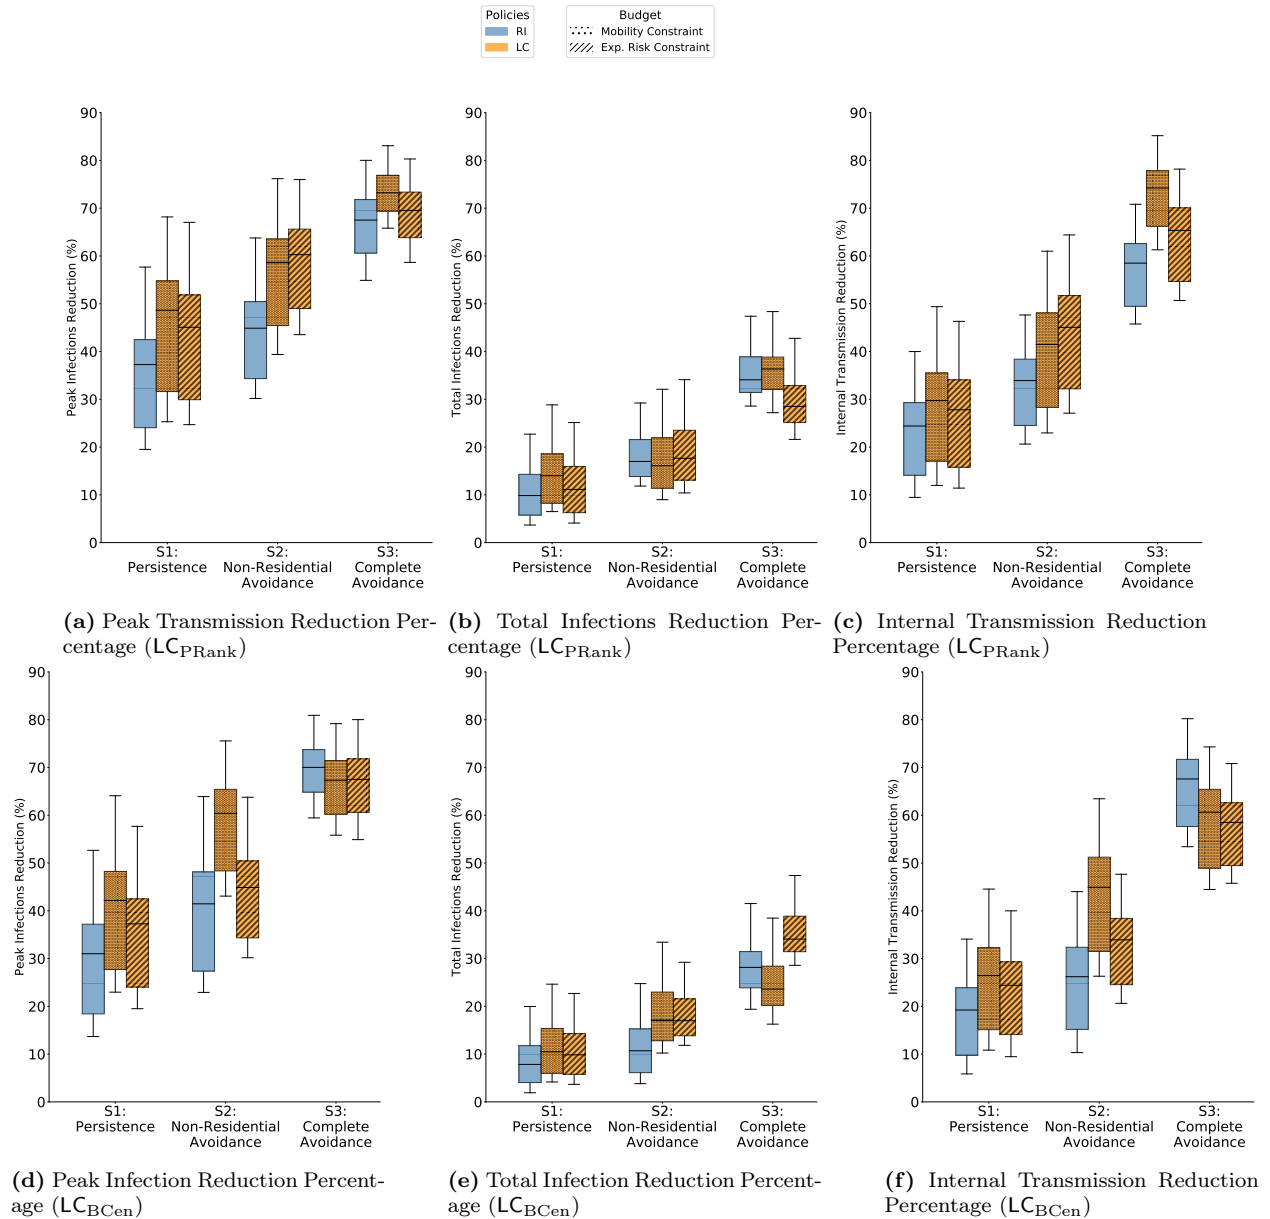


Figure S7: Disease control outcomes in Fall 2019 for different algorithms of LC with the ABM is calibrated on weeks 0–4 of Fall 2020 at GT. (a–c) Comparison of RI with LC_{PRank}. Under all behavioral scenarios, for peak infection reduction (b) and internal transmission reduction (c), LC_{PRank} shows better disease control outcomes than RI. For total infection reduction (b), LC_{PRank} is better in S1, worse in S3 when designed within an exposure risk budget, and comparable in others. (d–f) Comparison of RI with LC_{BCen}. Under all behavioral scenarios, for peak infection reduction (d) and internal transmission reduction (f) LC_{BCen} is better when designed within an exposure risk budget. For total infection reduction (e), LC_{BCen} is always worse than RI

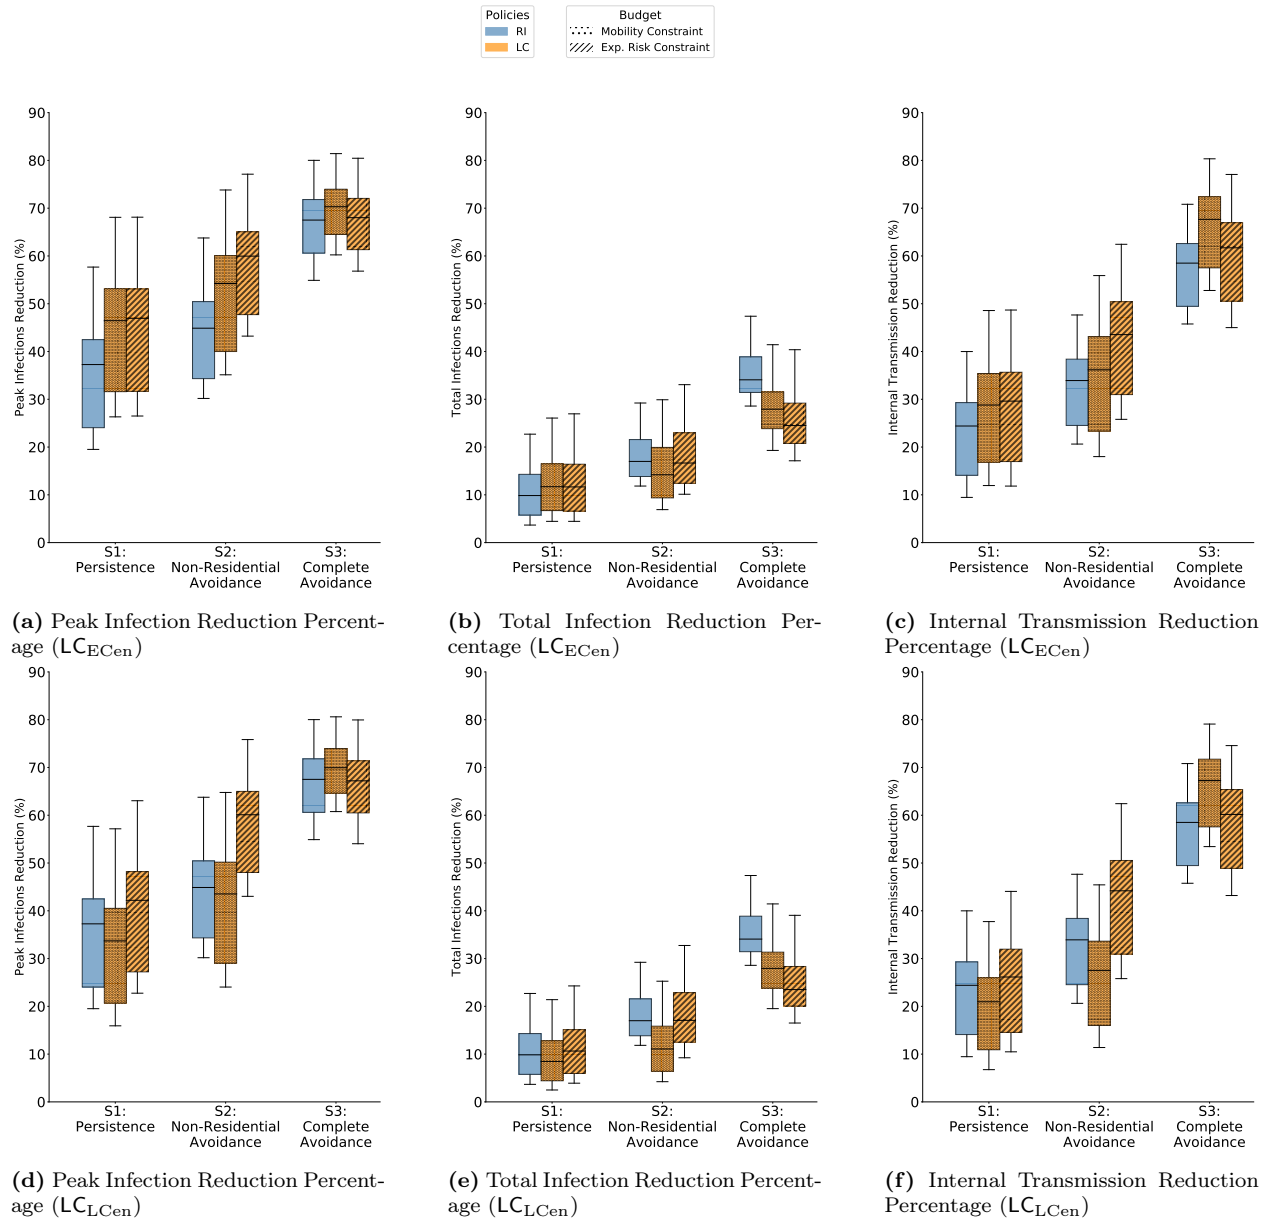


Figure S8: Disease control outcomes in Fall 2019 for different algorithms of LC with the ABM is calibrated on weeks 0 – 4 of Fall 2020 at GT. (a – c) Comparison of RI with LC_{ECen} . Under all behavioral scenarios, for peak infection reduction (b) and internal transmission reduction (c), LC_{ECen} shows better disease control outcomes than RI. For total infection reduction (b), LC_{ECen} is better in *S1* and worse in *S3* when designed within an exposure risk budget. (d – f) Comparison of RI with LC_{LCen} . Under all behavioral scenarios, for peak infection reduction (d) and internal transmission reduction (f), LC_{LCen} shows better disease control outcomes than RI. For total infection reduction (e), LC_{LCen} is better in *S1* and worse in *S3* when designed within an exposure risk budget.

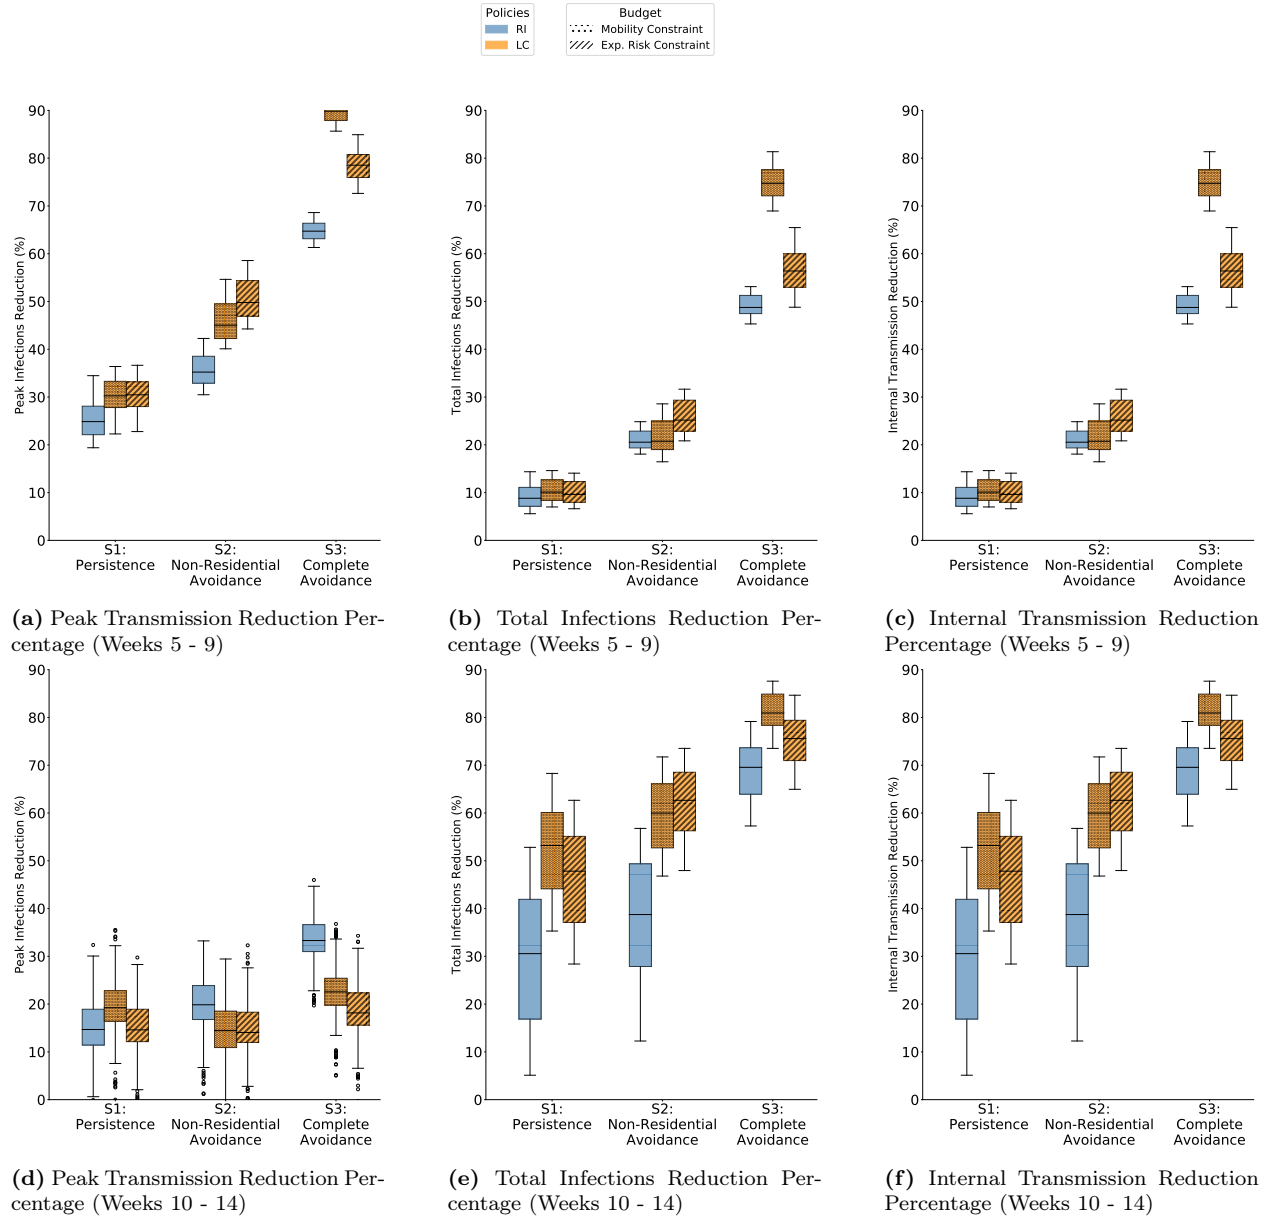


Figure S9: Disease control outcomes in Fall 2019 for LC_{PRank} . (a - c) The ABM was calibrated on weeks 5 – 9 of Fall 2020 at GT. Under all behavioral scenarios, for all outcomes, LC_{PRank} is better than RI. (d - f) The ABM was calibrated on weeks 10 – 14 of Fall 2020 at GT. Under all behavioral scenarios, for all outcomes, LC_{PRank} is better than RI.

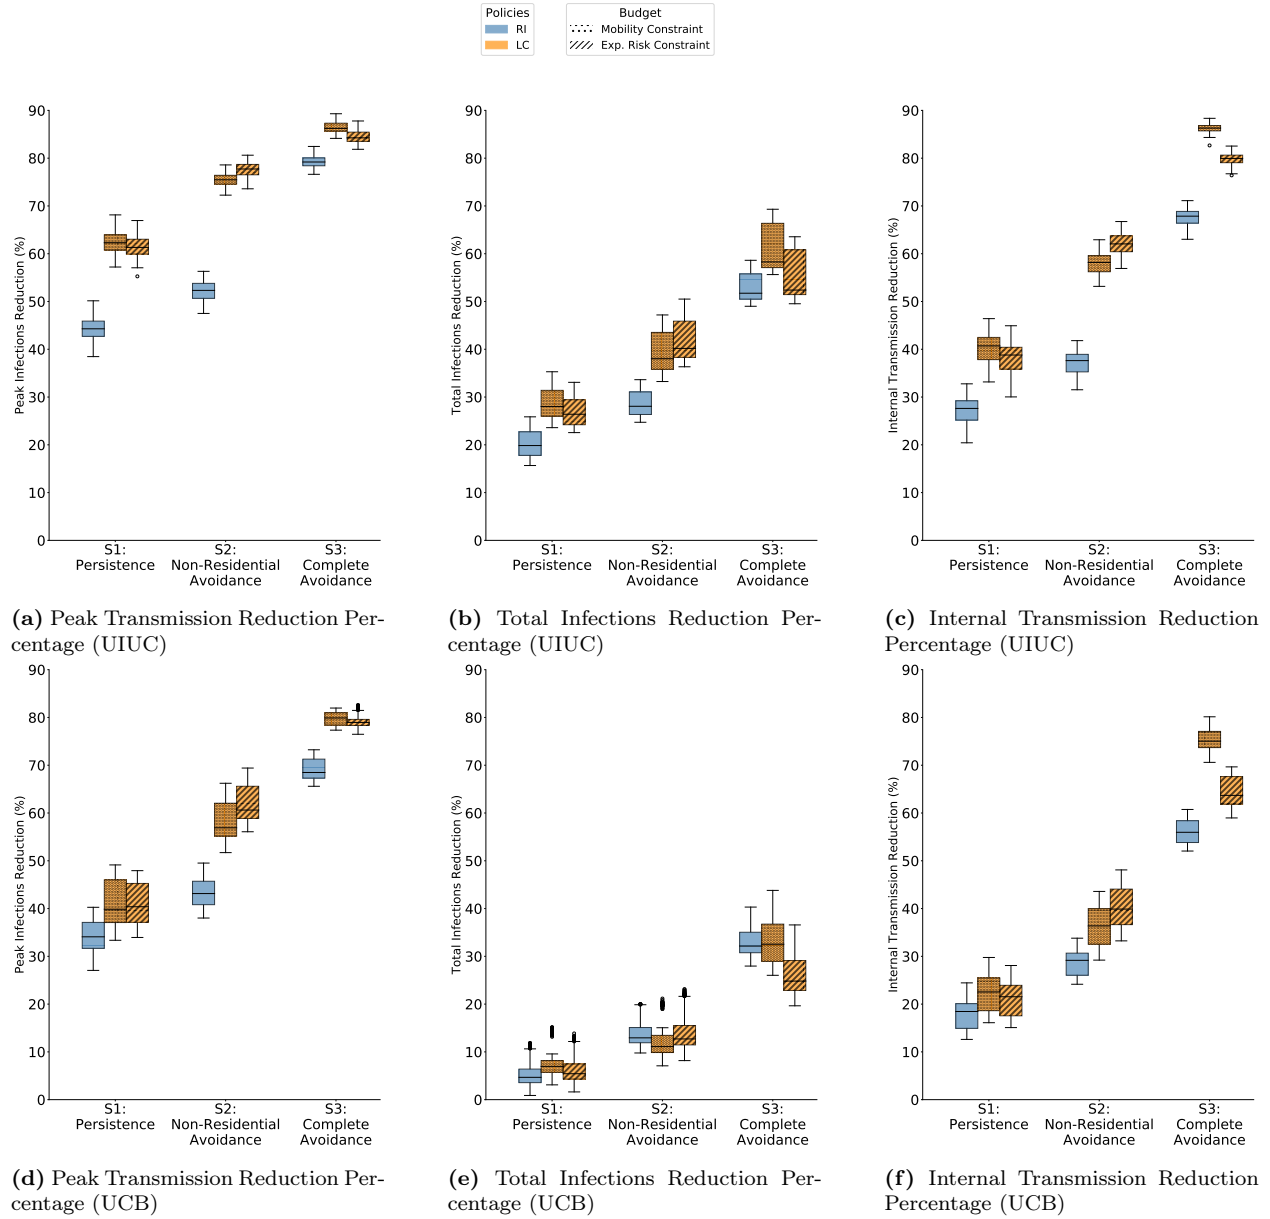


Figure S10: Disease control outcomes in Fall 2019 for LC_{PRank} . (a – c) The ABM was calibrated on weeks 0 – 4 of Fall 2020 at UIUC. Under all behavioral scenarios, for all outcomes, LC_{PRank} is better than RI. (d – f) The ABM was calibrated on weeks 0 – 4 of Fall 2020 at UC Berkeley. Under all behavioral scenarios, for all outcomes, LC_{PRank} is better than RI.

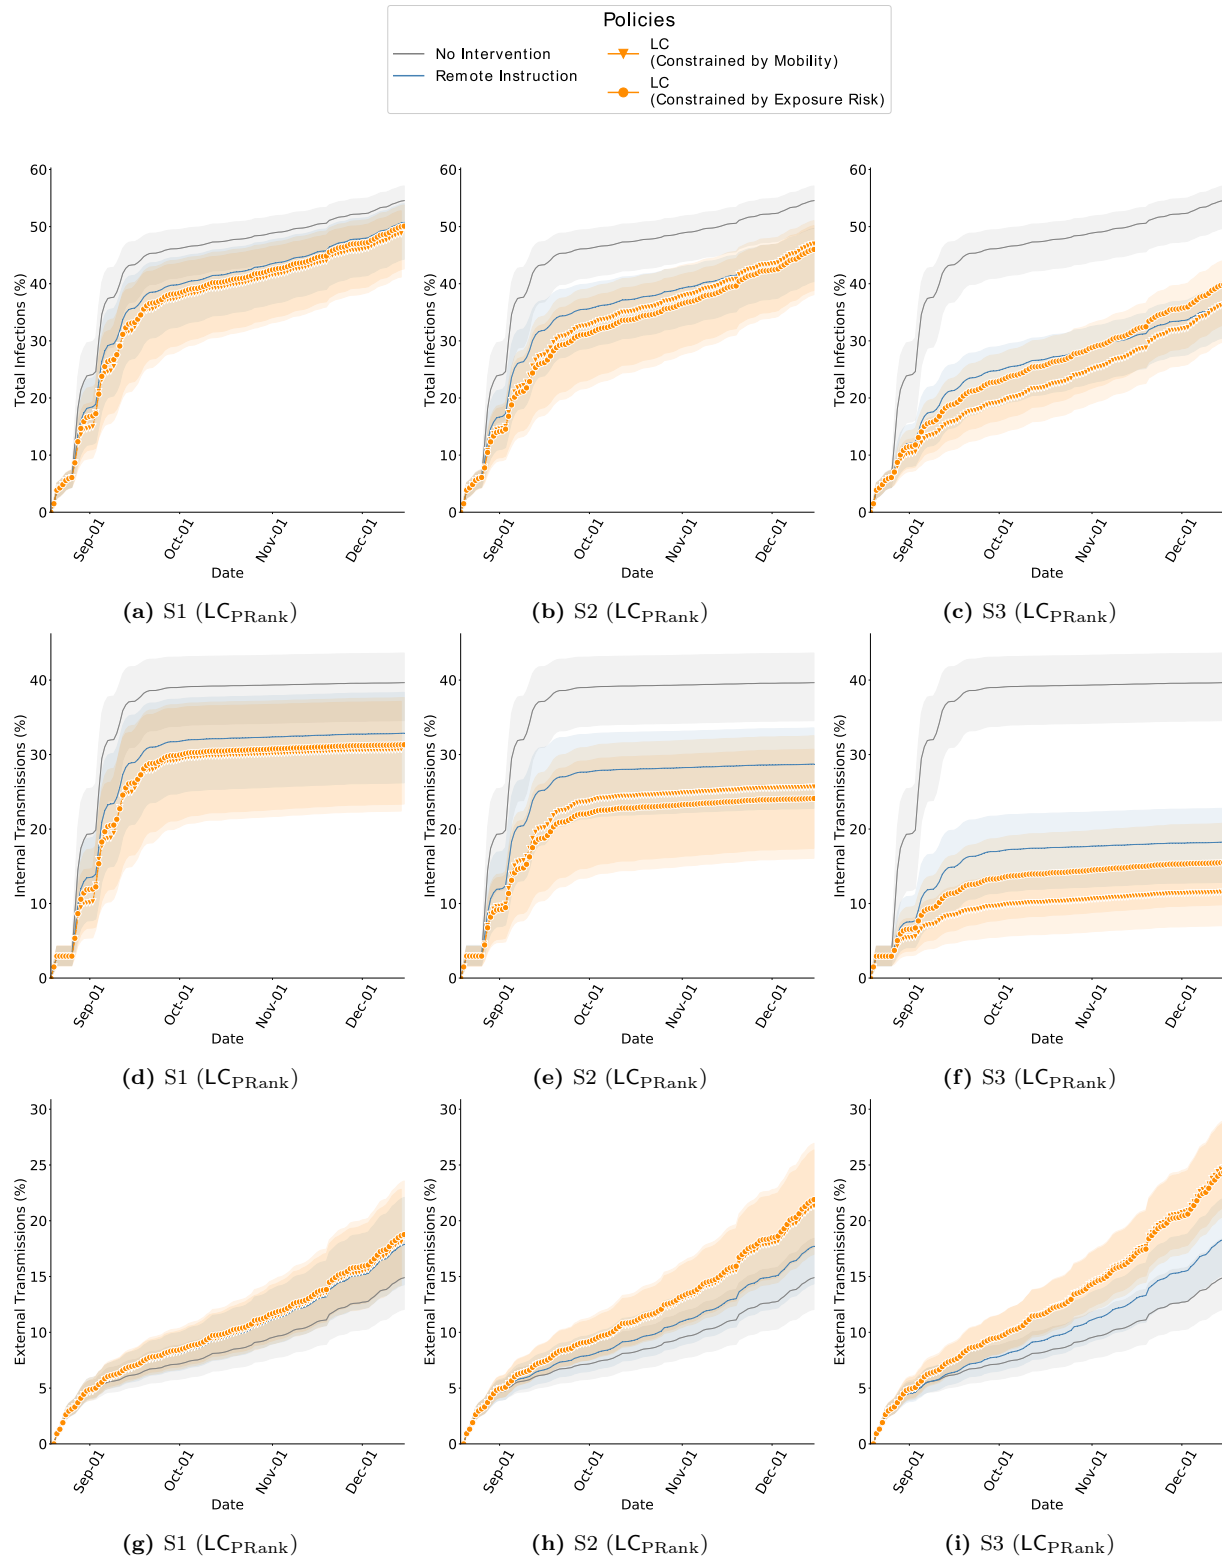


Figure S11: Cumulative infections in Fall 2019 while comparing RI and LC_{PRank} with ABM calibrated on weeks 0 – 4 of Fall 2020, GT. The bands show the 2.75th and 97.25th percentile. (a – c) Total infections of interventions is lower than no-intervention and is lowest in the S3 scenario. In this behavioral scenario, the mobility budget is 69% of what it would be without interventions, and therefore the transmissions are also contained. In comparison, in Fall 2020, we saw far fewer infections which is because the mobility was 39% of that in Fall 2019. (d – f) Internal transmissions are lower with LC_{PRank} in comparison to RI. (g – i) External transmissions are higher with LC_{PRank} in comparison to RI. Since internal transmission is controlled, more individuals remain susceptible to infections from outside campus.

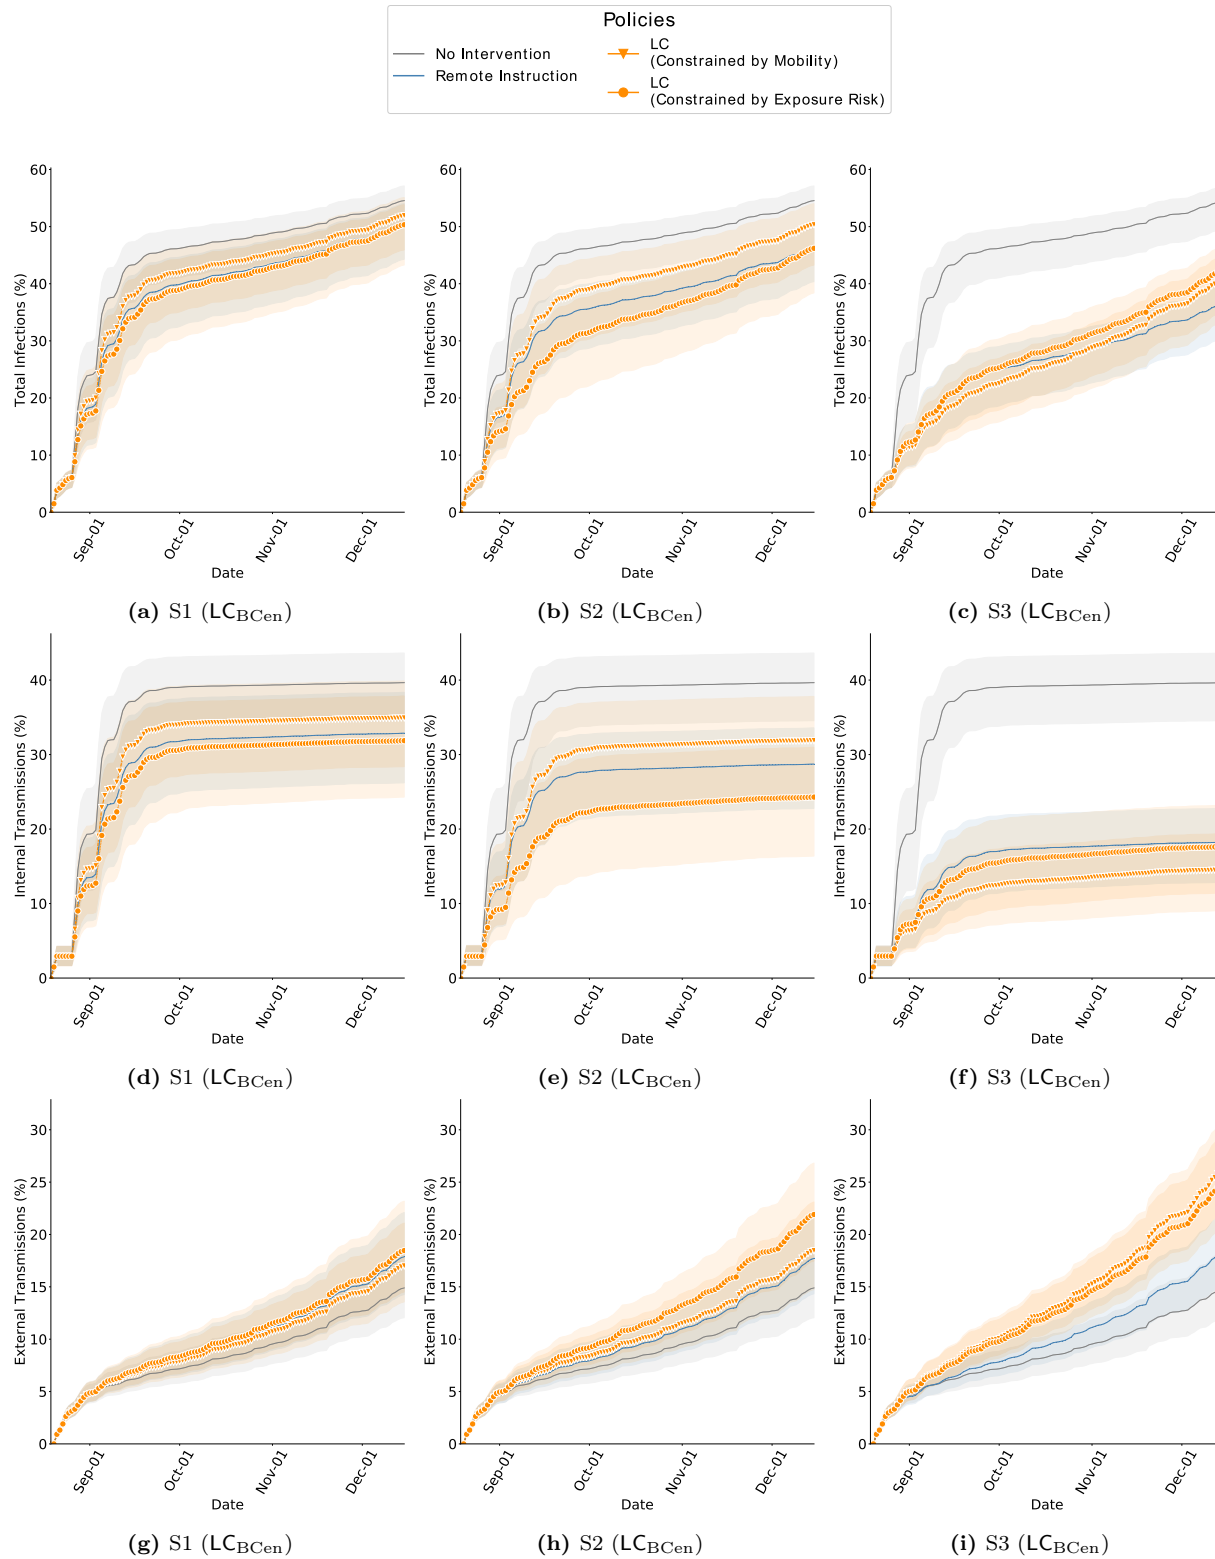


Figure S12: Cumulative infections in Fall 2019 while comparing RI and LC_{BCen} with ABM calibrated on weeks 0 – 4 of Fall 2020, GT. The bands show the 2.75th and 97.25th percentile. (a – c) Total infections of interventions is lower than no-intervention and is lowest in the S3 scenario. In this scenario, the mobility budget is 69% of what it would be without interventions, and therefore the transmissions are also contained. In comparison, in Fall 2020, we saw far fewer infections which is because the mobility was 39% of that in Fall 2019. (d – f) Internal transmissions are lower with LC_{BCen} in comparison to RI, only when constrained under the exposure risk budget. (g – i) External transmissions are higher with LC_{BCen} in comparison to RI. Since internal transmission is controlled, more individuals remain susceptible to infections from outside campus.

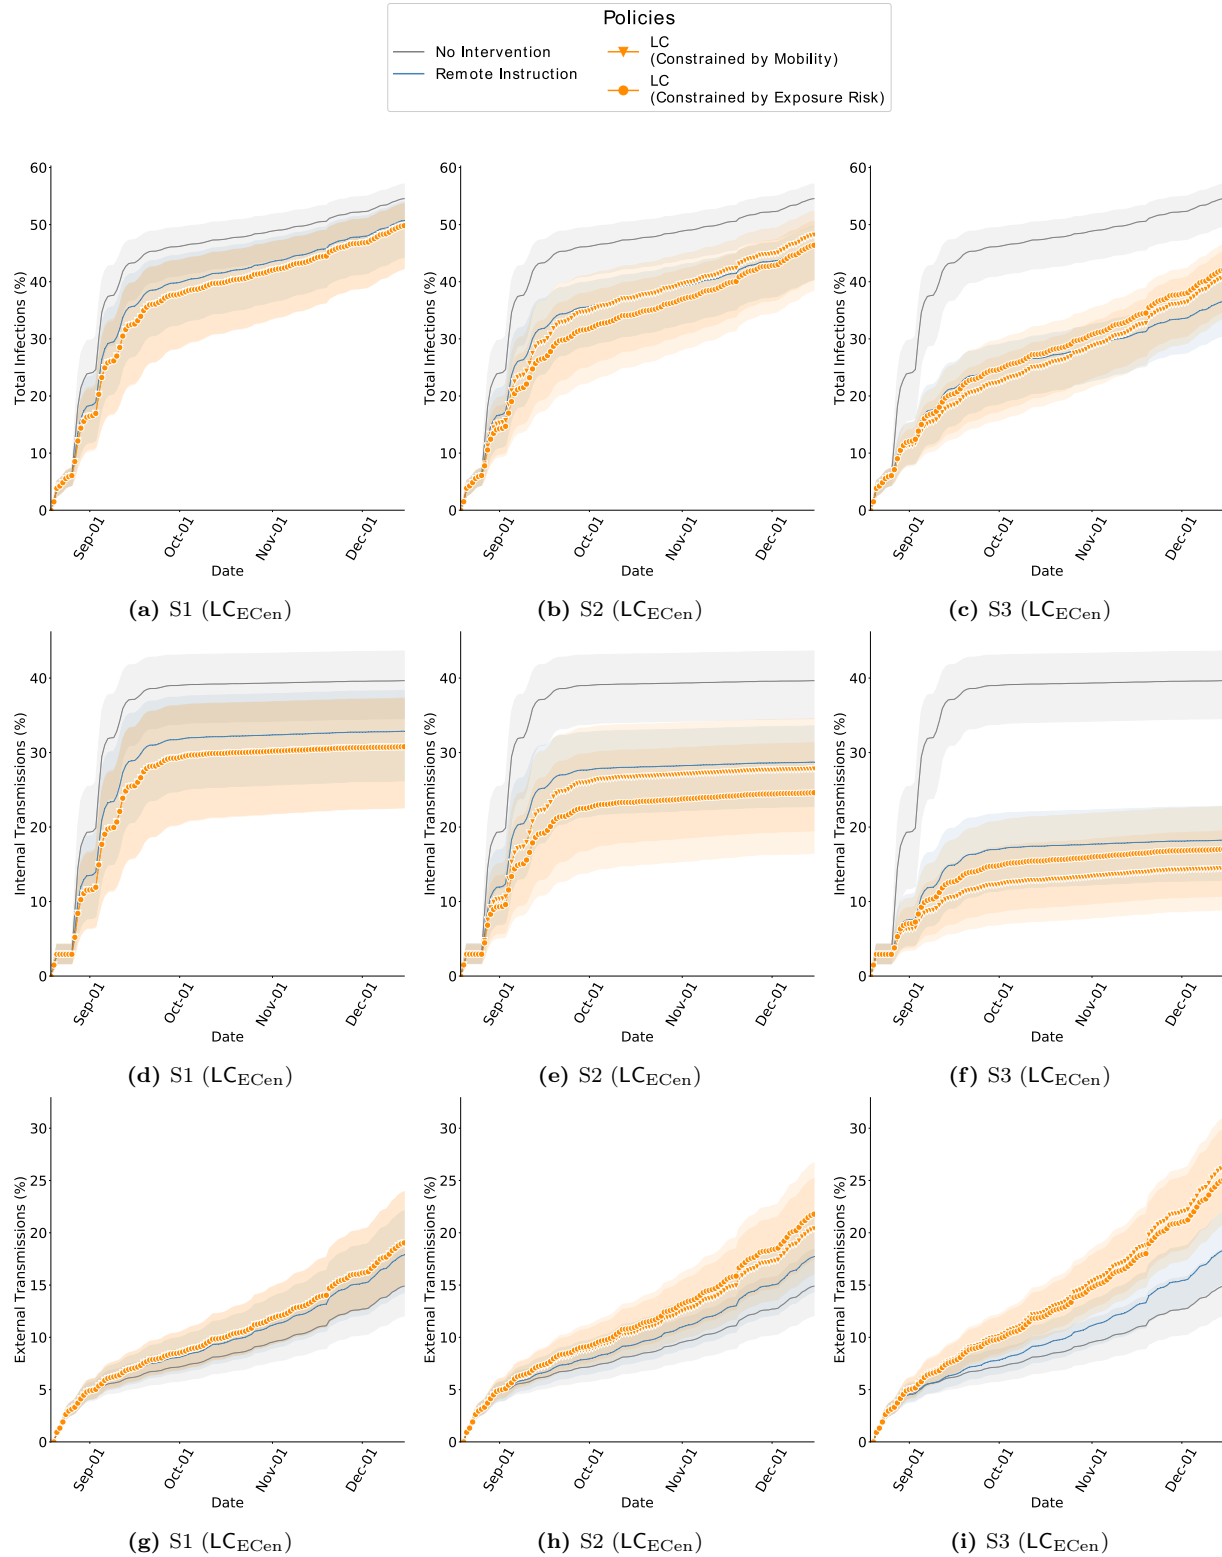


Figure S13: Cumulative infections in Fall 2019 while comparing RI and LC_{ECen} with ABM calibrated on weeks 0 – 4 of Fall 2020, GT. The bands show the 2.75th and 97.25th percentile. (a – c) Total infections of interventions is lower than no-intervention scenarios and is lowest in the S3 scenario. In this scenario, the mobility budget is 69% of what it would be without interventions, and therefore the transmissions are also contained. In comparison, in Fall 2020, we saw far fewer infections which is because the mobility was 39% of that in Fall 2019. (d – f) Internal transmissions are lower with LC_{ECen} in comparison to RI. (g – i) External transmissions are higher with LC_{ECen} in comparison to RI. Since internal transmission is controlled, more individuals remain susceptible to infections from outside campus.

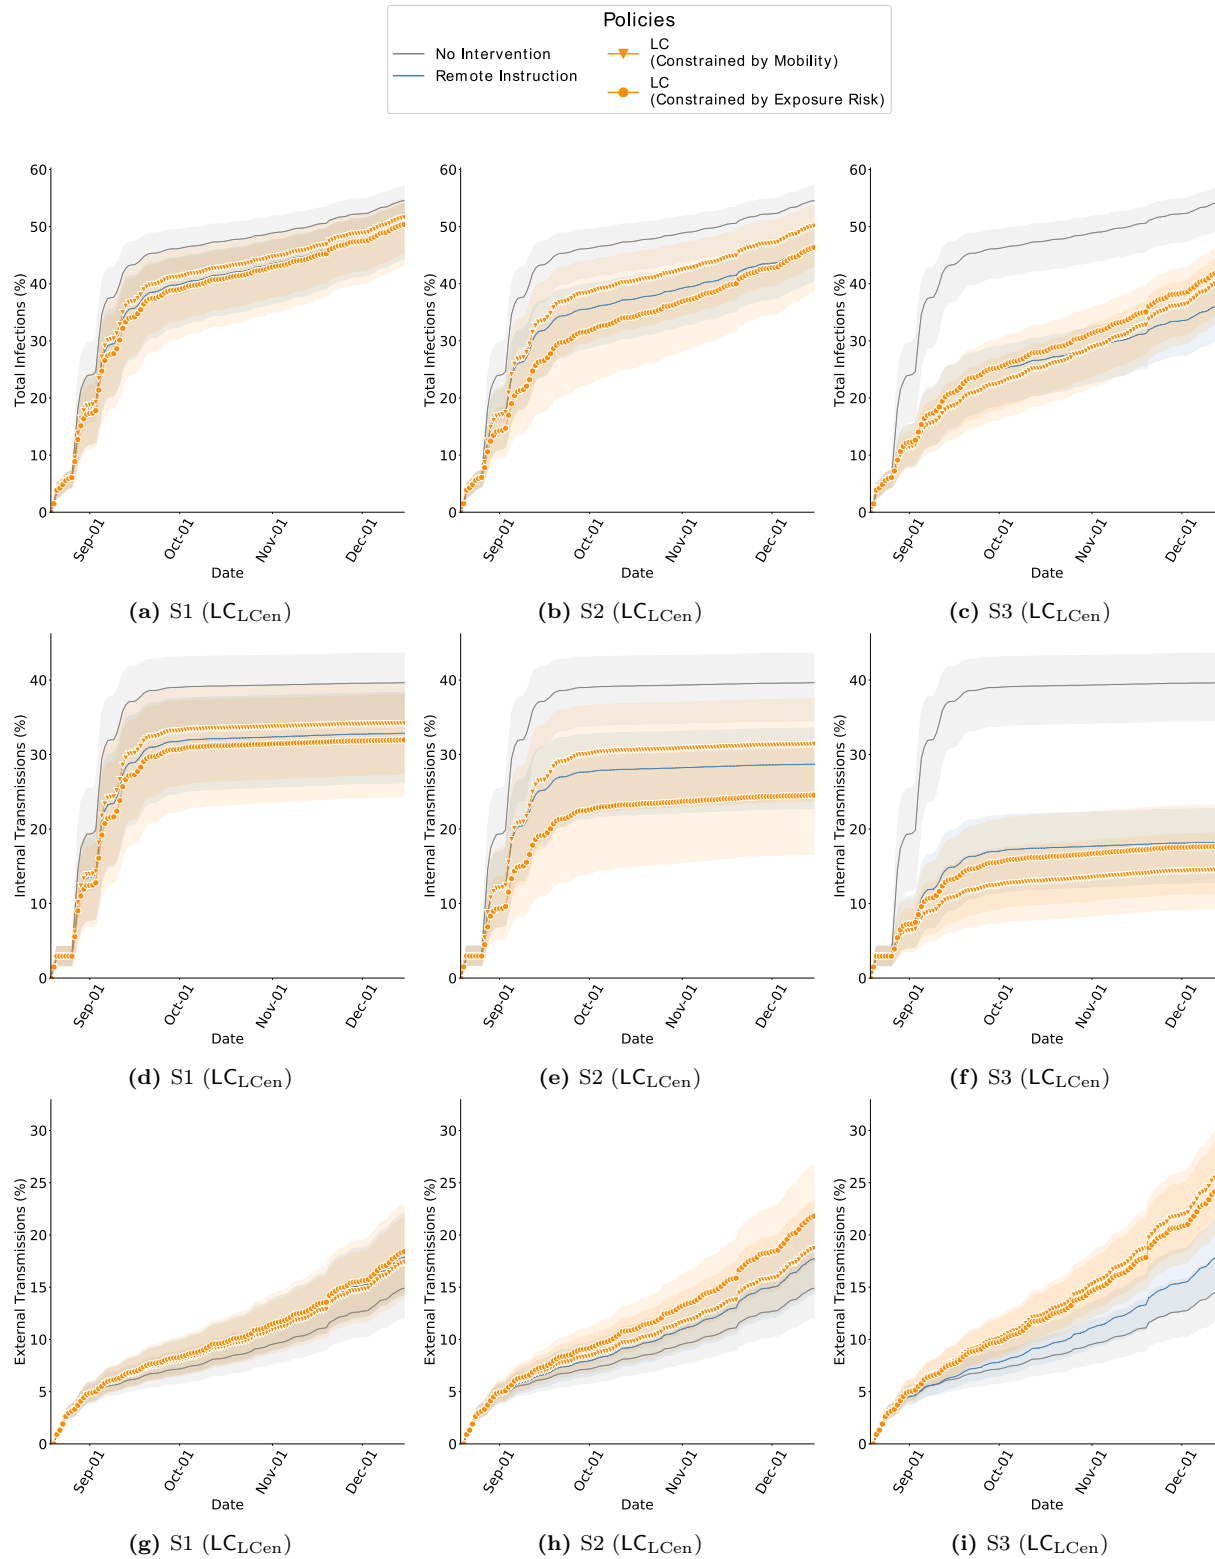


Figure S14: Cumulative infections in Fall 2019 while comparing RI and LC_{LC}Cen with ABM calibrated on weeks 0 – 4 of Fall 2020, GT. The bands show the 2.75th and 97.25th percentile. (a – c) Total infections of interventions is lower than no-intervention scenarios and is lowest in the S3 scenario. In this scenario, the mobility budget is 69% of what it would be without interventions, and therefore the transmissions are also contained. In comparison, in Fall 2020, we saw far fewer infections which is because the mobility was 39% of that in Fall 2019. (d – f) Internal transmissions are lower with LC_{LC}Cen in comparison to RI. (g – i) External transmissions are higher with LC_{LC}Cen in comparison to RI. Since internal transmission is controlled, more individuals remain susceptible to infections from outside campus.

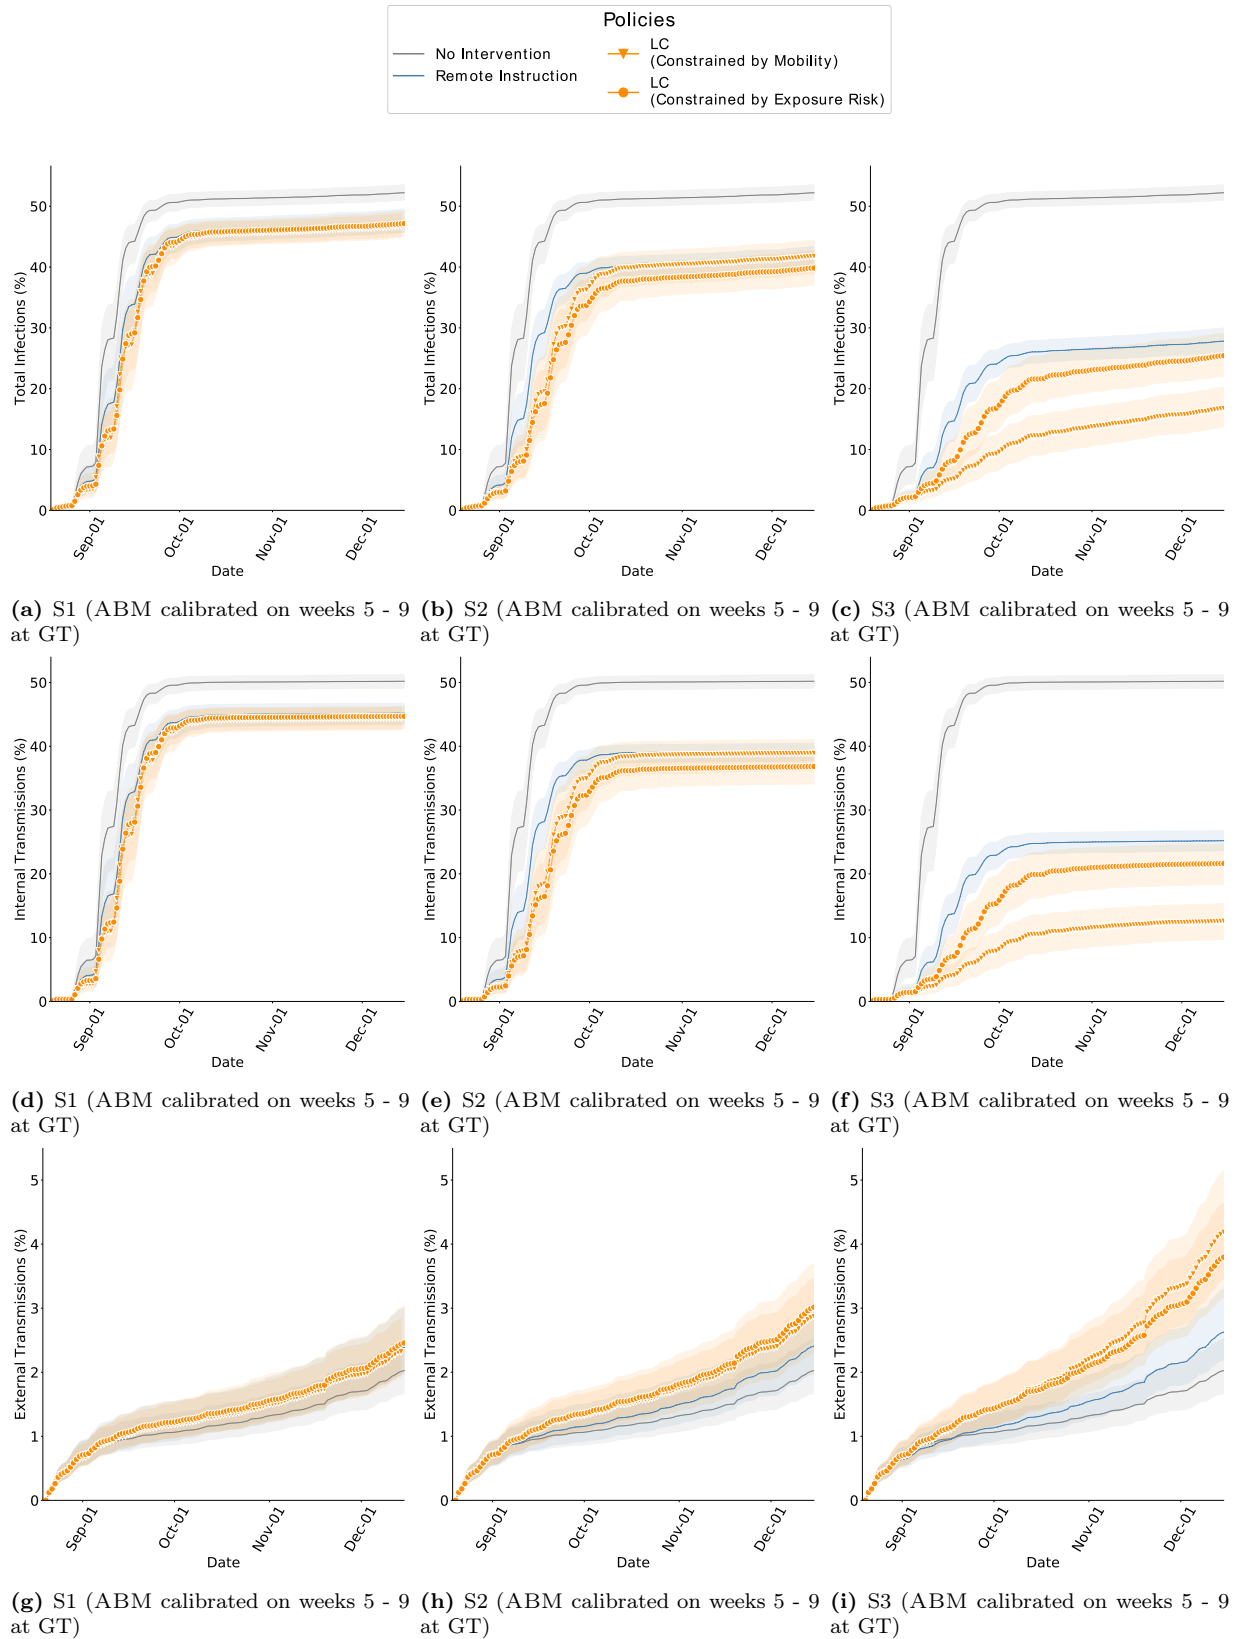


Figure S15: Cumulative infections in Fall 2019 while comparing RI and LC_{PRank} with ABM calibrated on weeks 5 – 9 of Fall 2020, GT. The bands show the 2.75th and 97.25th percentile. (a – c) Total infections of interventions is lower than no-intervention scenarios and is lowest in the S3 scenario. In this scenario, the mobility budget is 69% of what it would be without interventions, and therefore the transmissions are also contained. In comparison, in Fall 2020, we saw far fewer infections which is because the mobility was 39% of that in Fall 2019. (d – f) Internal transmissions are lower with LC_{PRank} in comparison to RI. (g – i) External transmissions are higher with LC_{PRank} in comparison to RI. Since internal transmission is controlled, more individuals remain susceptible to infections from outside campus.

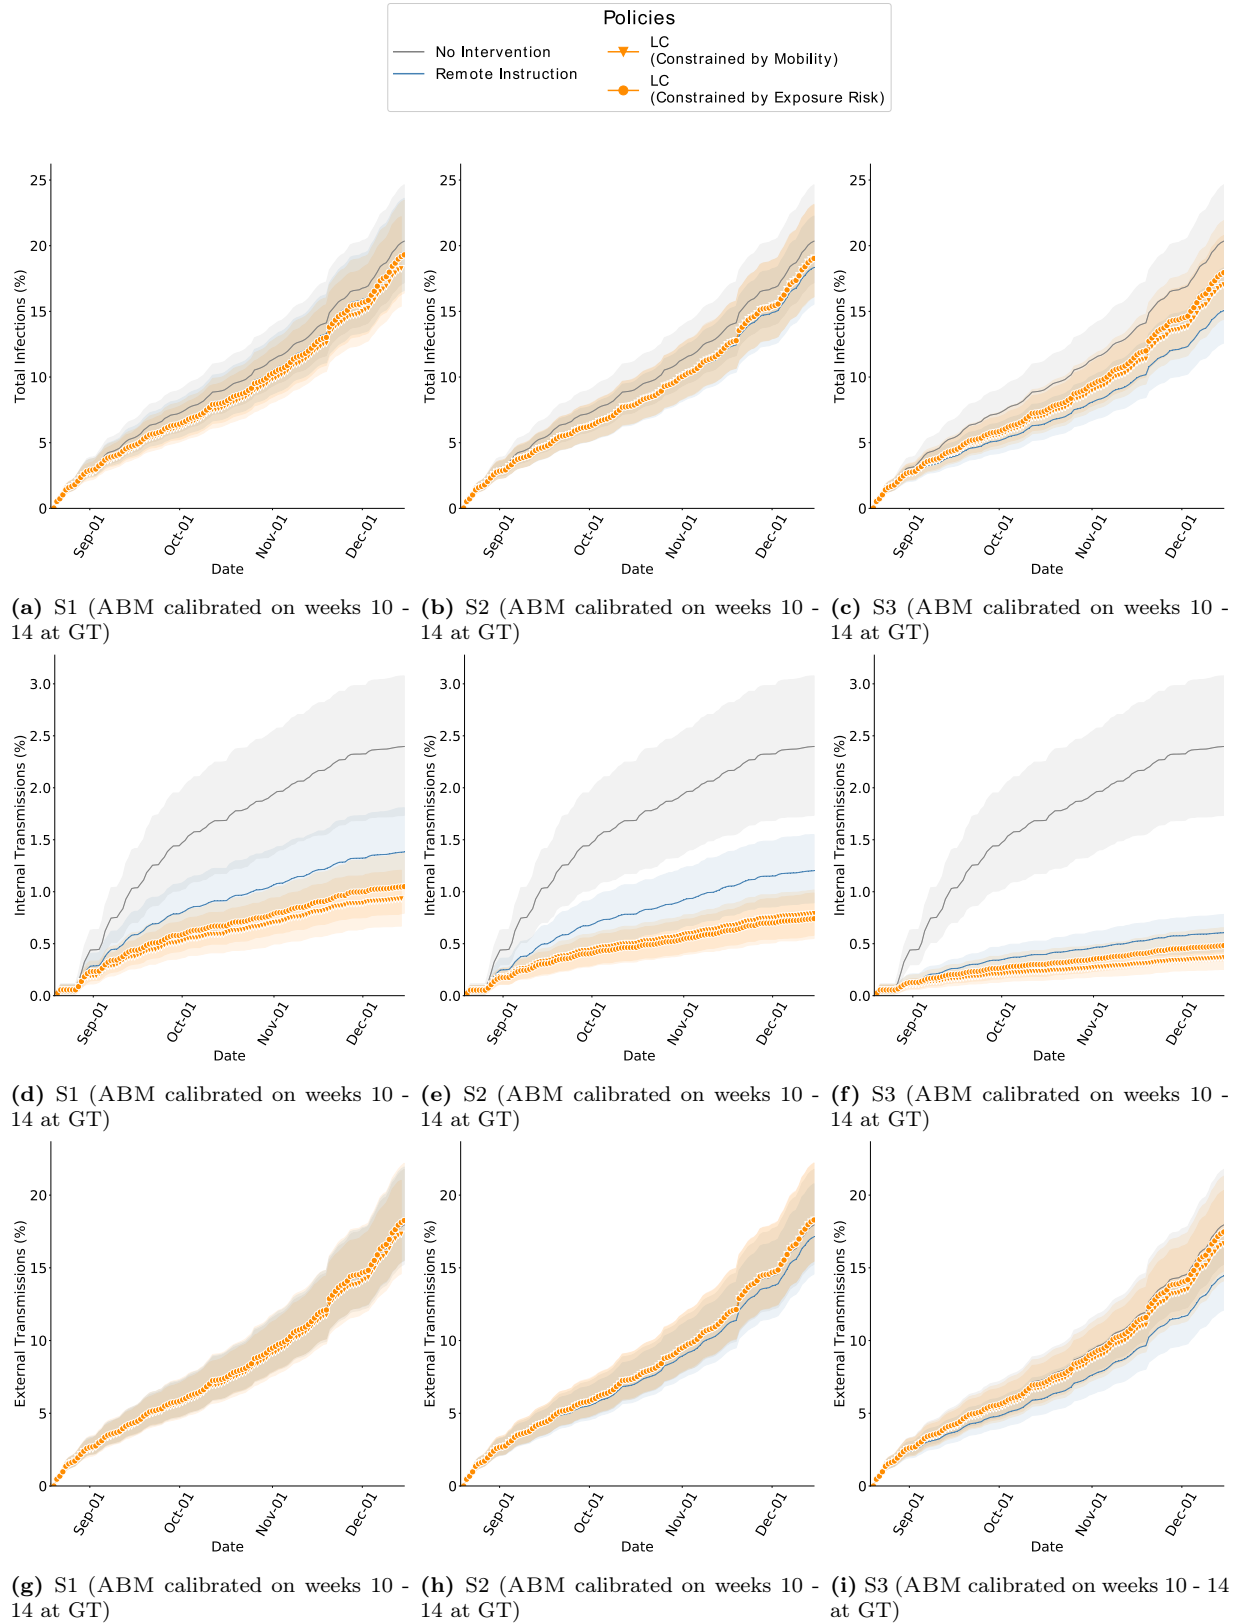


Figure S16: Cumulative infections in Fall 2019 while comparing RI and LC_{PRank} with ABM calibrated on weeks 10 – 14 of Fall 2020, GT. The bands show the 2.75th and 97.25th percentile. (a – c) Total infections of interventions is lower than no-intervention scenarios and is lowest in the S3 scenario. In this scenario, the mobility budget is 69% of what it would be without interventions, and therefore the transmissions are also contained. In comparison, in Fall 2020, we saw far fewer infections which is because the mobility was 39% of that in Fall 2019. (d – f) Internal transmissions are lower with LC_{PRank} in comparison to RI. (g – i) External transmissions are higher with LC_{PRank} in comparison to RI. Since internal transmission is controlled, more individuals remain susceptible to infections from outside campus.

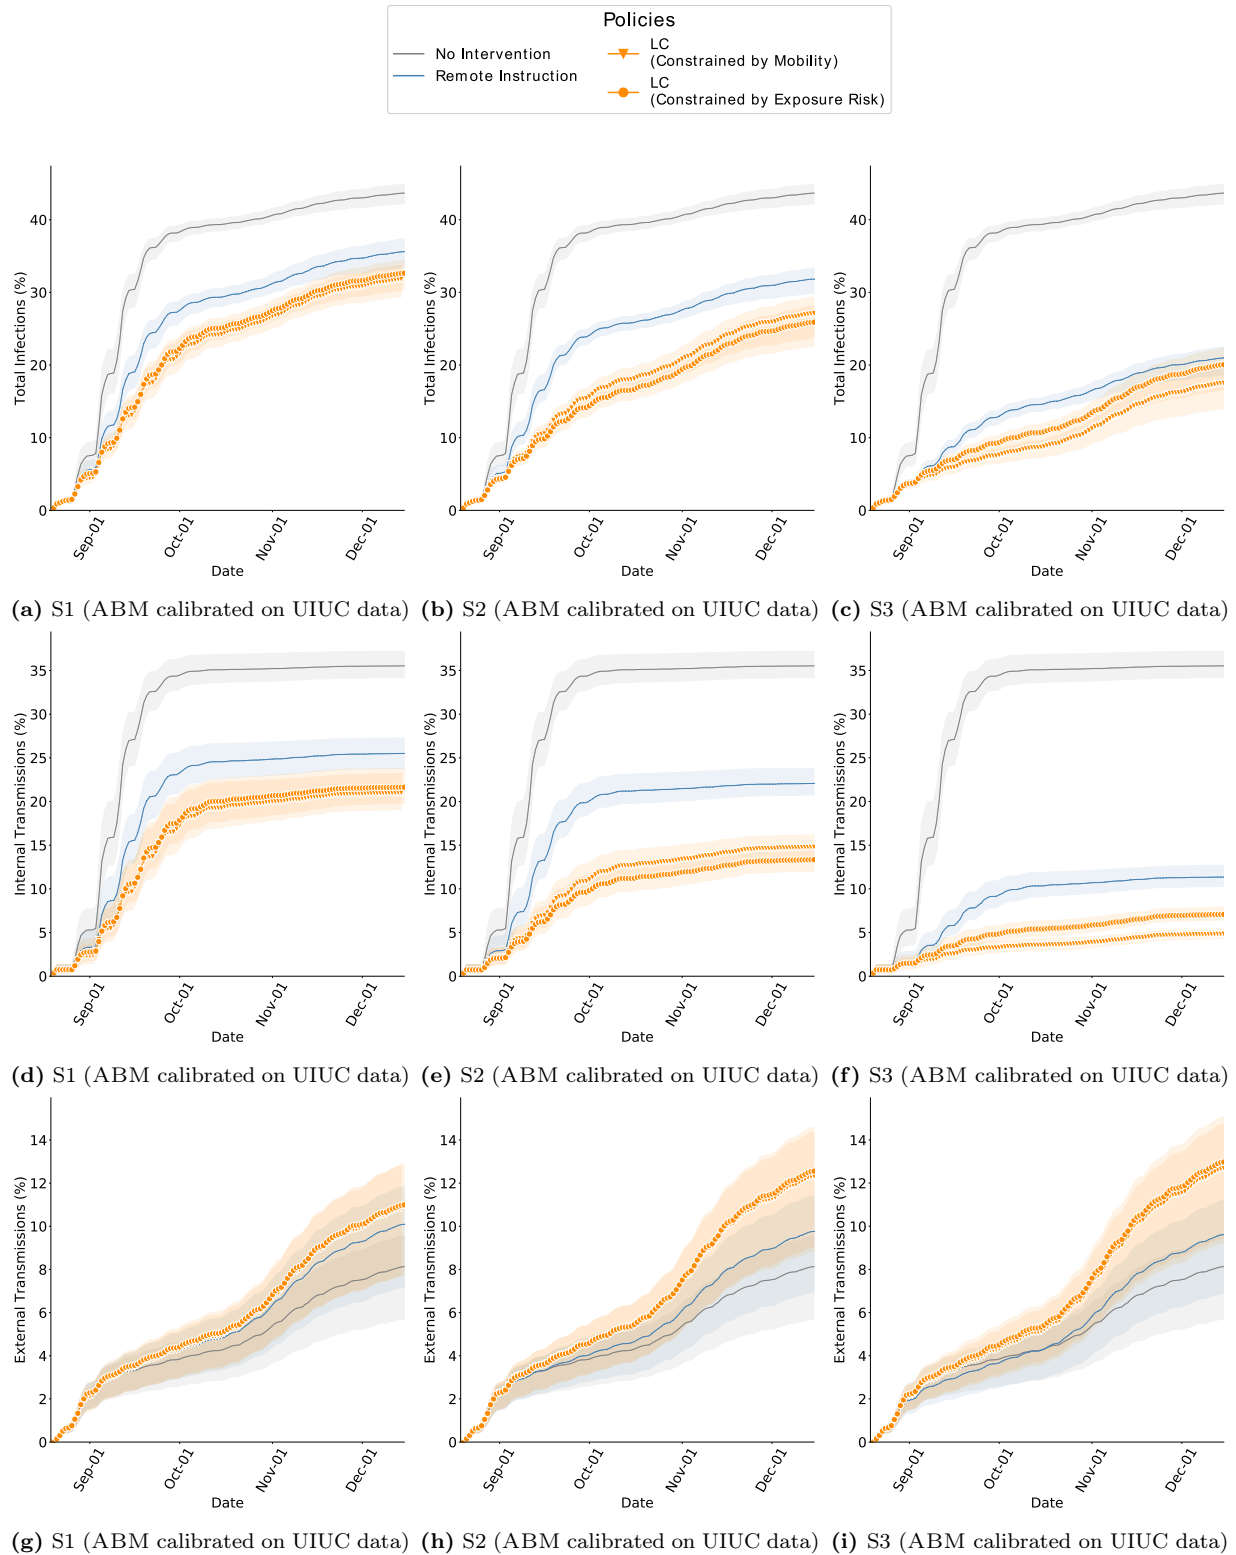


Figure S17: Cumulative infections in Fall 2019 while comparing RI and LC_{PRank} with ABM calibrated on weeks 0 – 4 of Fall 2020, UIUC. The bands show the 2.75th and 97.25th percentile. (a – c) Total infections of interventions is lower than no-intervention scenarios and is lowest in the S3 scenario. In this scenario, the mobility budget is 69% of what it would be without interventions, and therefore the transmissions are also contained. In comparison, in Fall 2020, we saw far fewer infections which is because the mobility was 39% of that in Fall 2019. (d – f) Internal transmissions are lower with LC_{PRank} in comparison to RI. (g – i) External transmissions are higher with LC_{PRank} in comparison to RI. Since internal transmission is controlled, more individuals remain susceptible to infections from outside campus.

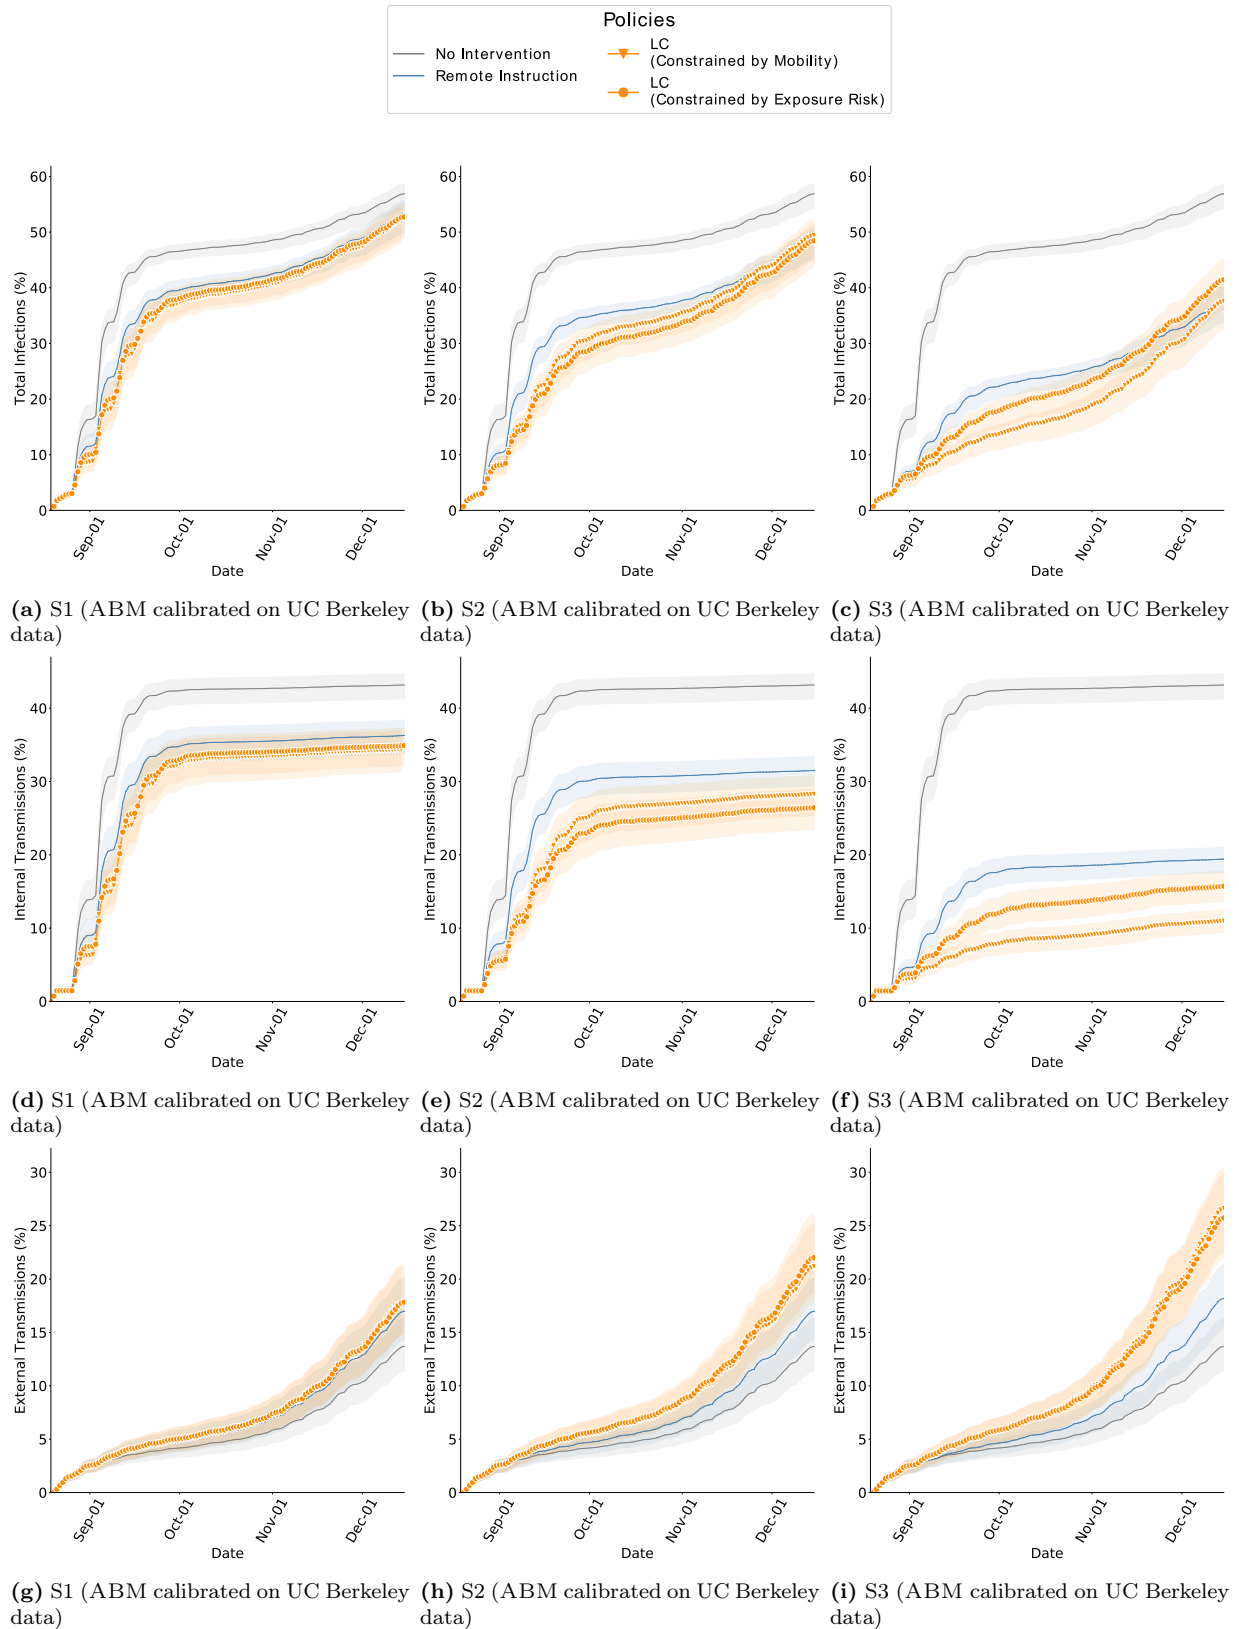


Figure S18: Cumulative infections in Fall 2019 while comparing RI and LC_{PRank} with ABM calibrated on weeks 0 – 4 of Fall 2020, UC Berkeley. The bands show the 2.75th and 97.25th percentile. (a – c) Total infections of interventions is lower than no-intervention scenarios and is lowest in the S3 scenario. In this scenario, the mobility budget is 69% of what it would be without interventions, and therefore the transmissions are also contained. In comparison, in Fall 2020, we saw far fewer infections which is because the mobility was 39% of that in Fall 2019. (d – f) Internal transmissions are lower with LC_{PRank} in comparison to RI. (g – i) External transmissions are higher with LC_{PRank} in comparison to RI. Since internal transmission is controlled, more individuals remain susceptible to infections from outside campus.

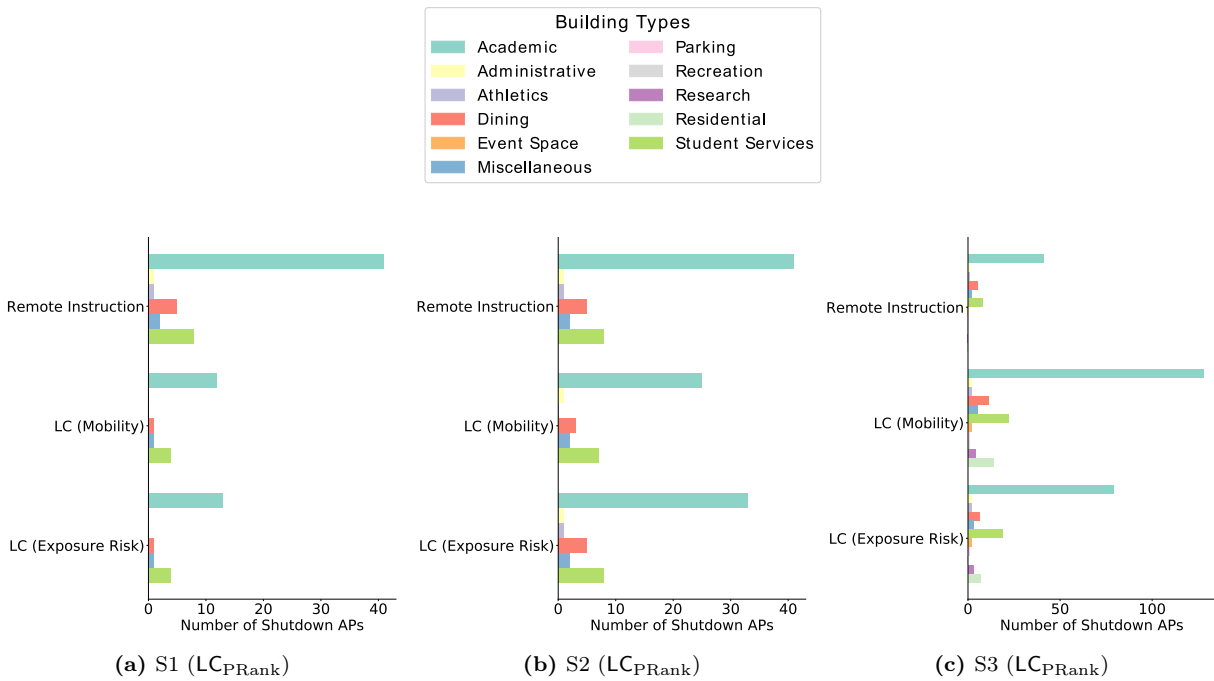


Figure S19: The locations shutdown by each policy are grouped into the the general building category. The distribution of locations is different between policies, for example, in *S1* (a) and *S2* (b), LC closes fewer locations than RI. Even when targeting spaces in similar buildings, the locations are qualitatively different — RI only affects classrooms, whereas LC also closes smaller spaces like breakout rooms, reading areas and cafes. LC In *S3* (c) we find LC to target locations in a greater variety of buildings, but it also targets more locations to utilize the budget.

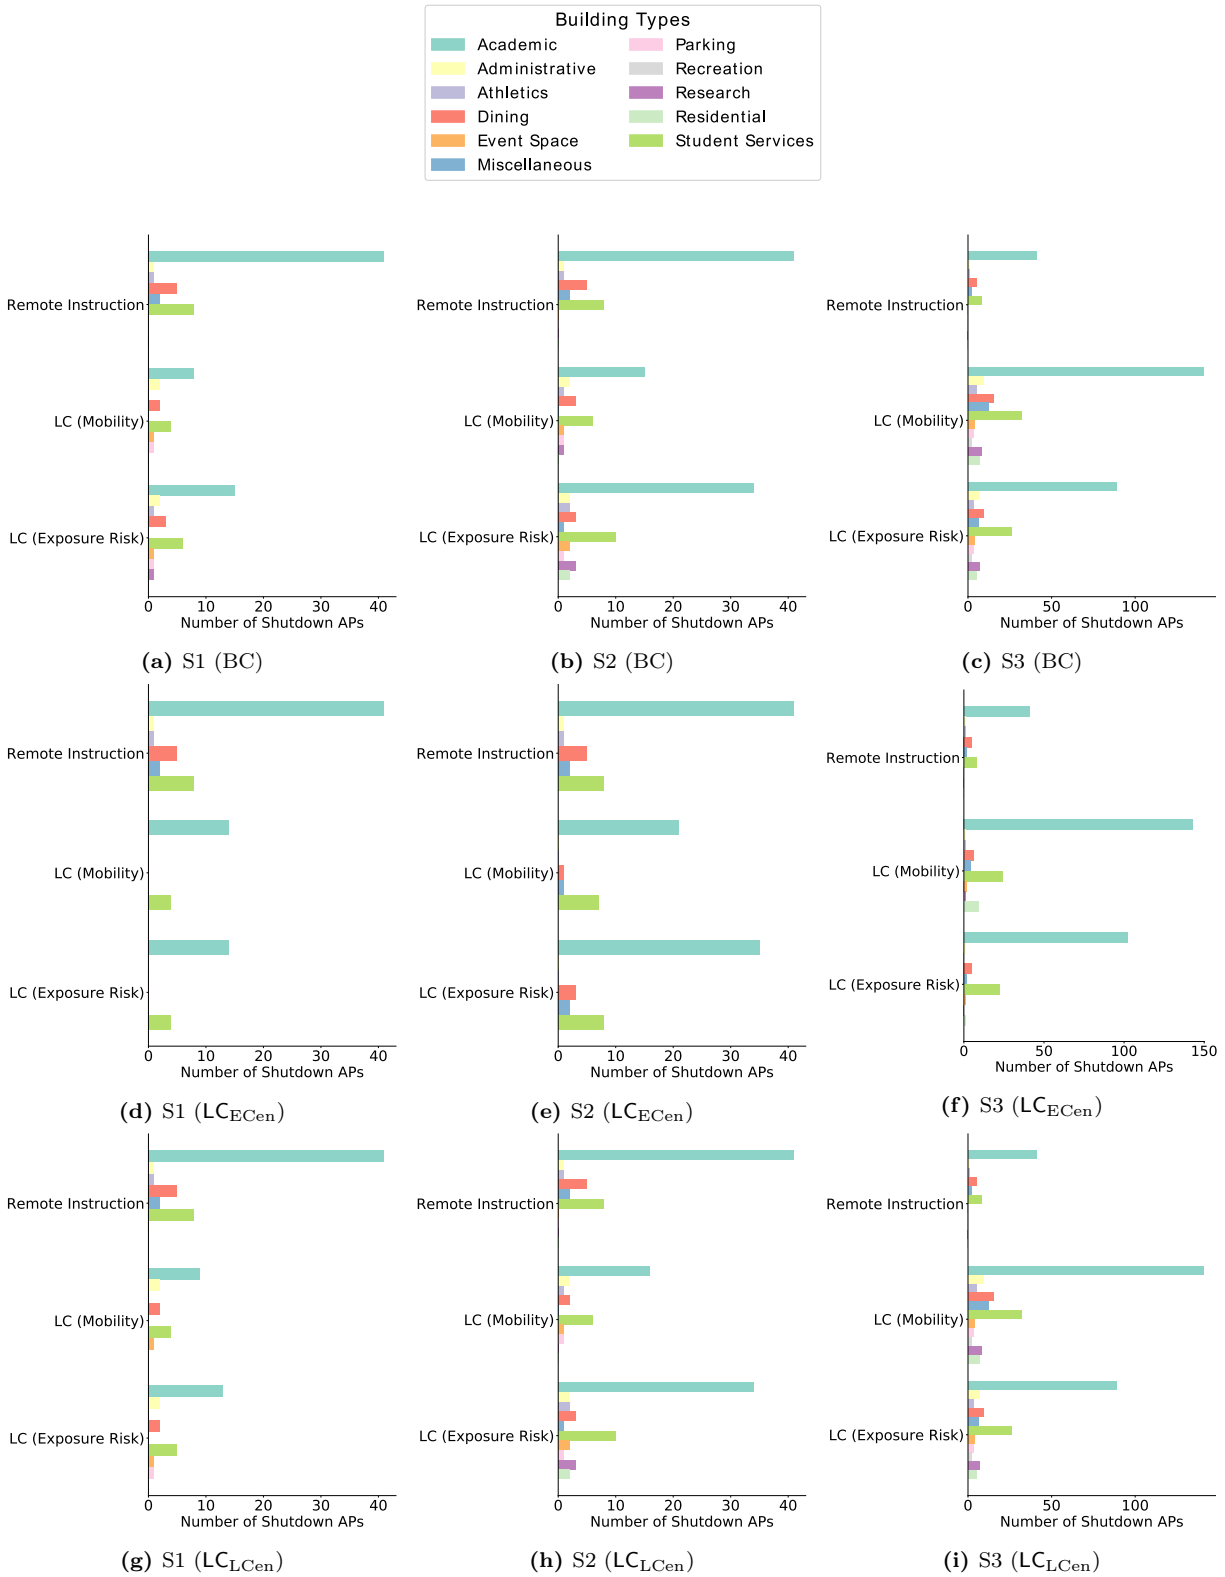


Figure S20: The locations shutdown by each policy are grouped into the the general building category. The distribution of locations is different between policies, for example, in *S1* (a) and *S2* (b), LC closes fewer locations than RI. Even when targeting spaces in similar buildings, the locations are qualitatively different — RI only affects classrooms, whereas LC also closes smaller spaces like breakout rooms, reading areas and cafes. LC In *S3* (c) we find LC to target locations in a greater variety of buildings, but it also targets more locations to utilize the budget.

SI References

- [1] João Pedro Azevedo, Amer Hasan, Diana Goldemberg, Syedah Aroob Iqbal, and Koen Geven. *Simulating the potential impacts of COVID-19 school closures on schooling and learning outcomes: A set of global estimates*. The World Bank, 2020.
- [2] Eugene Bagdasaryan, Griffin Berlstein, Jason Waterman, Eleanor Birrell, Nate Foster, Fred B Schneider, and Deborah Estrin. Ancile: Enhancing privacy for ubiquitous computing with use-based privacy. In *Proceedings of the 18th ACM Workshop on Privacy in the Electronic Society*, pages 111–124, 2019.
- [3] Seth G Benzell, Avinash Collis, and Christos Nicolaides. Rationing social contact during the covid-19 pandemic: Transmission risk and social benefits of us locations. *Proceedings of the National Academy of Sciences*, 117(26):14642–14644, 2020.
- [4] Phillip Bonacich. Some unique properties of eigenvector centrality. *Social networks*, 29(4):555–564, 2007.
- [5] Molly Borowiak, Fayfay Ning, Justin Pei, Sarah Zhao, Hwai-Ray Tung, and Rick Durrett. Controlling the spread of covid-19 on college campuses. *arXiv preprint arXiv:2008.07293*, 2020.
- [6] Gabriela Arriagada Bruneau, Vincent C. Müller, and Mark S. Gilthorpe. The ethical imperatives of the covid 19 pandemic: A review from data ethics. *Veritas: Revista de Filosofía y Teología*, 46:13–35, 2020.
- [7] Serina Chang, Emma Pierson, Pang Wei Koh, Jaline Gerardin, Beth Redbird, David Grusky, and Jure Leskovec. Mobility network models of covid-19 explain inequities and inform reopening. *Nature*, 589(7840):82–87, 2021.
- [8] V Das Swain, H Kwon, B Saket, M Bin Morshed, K Tran, D Patel, Y Tian, J Philipose, Y Cui, T Plötz, et al. Leveraging wifi network logs to infer social interactions: A case study of academic performance and student behavior. *arXiv e-prints*, 2020.
- [9] Alameda County Public Health Department. Real-time data of the impact of covid-19, 2020. Available at: <https://covid-19.acgov.org/data.page>.
- [10] Champaign-Urbana Public Health Distric. Champaign-urbana covid-19 coronavirus information, 2020. Available at: <https://www.c-uphd.org/champaign-urbana-illinois-coronavirus-information.html>.
- [11] Emma Dorn, Bryan Hancock, Jimmy Sarakatsannis, and Ellen Viruleg. Covid-19 and student learning in the united states: The hurt could last a lifetime. *McKinsey & Company*, 2020.
- [12] Muawya Habib Sarnoub Eldaw, Mark Levene, and George Roussos. Presence analytics: making sense of human social presence within a learning environment. In *2018 IEEE/ACM 5th International Conference on Big Data Computing Applications and Technologies (BDCAT)*, pages 174–183. IEEE, 2018.

- [13] Linton C Freeman. A set of measures of centrality based on betweenness. *Sociometry*, pages 35–41, 1977.
- [14] Katy Gaythorpe, Natsuko Imai, Gina Cuomo-Dannenburg, Marc Baguelin, Sangeeta Bhatia, Adhiratha Boonyasiri, and A Cori. Report 8: Symptom progression of covid-19, 2020.
- [15] Greg Gibson, Joshua S. Weitz, Michael P. Shannon, Benjamin Holton, Anton Bryksin, Brian Liu, Sandra Bramblett, JulieAnne Williamson, Michael Farrell, Alexander Ortiz, Chaouki T. Abdallah, and Andrés J. García. Surveillance-to-diagnostic testing program for asymptomatic sars-cov-2 infections on a large, urban campus - georgia institute of technology, fall 2020. *medRxiv*, 2021. Available at: <https://www.medrxiv.org/content/early/2021/01/31/2021.01.28.21250700>.
- [16] Philip T Gressman and Jennifer R Peck. Simulating covid-19 in a university environment. *Mathematical biosciences*, 328:108436, 2020.
- [17] Emily S. Gurley. Strategies to support the covid-19 response in lmics, 2020. Available at: [https://hopkinglobalhealth.org/assets/documents/CGH_Webinar_-_Contact_Tracing_\(Final_Version\).pdf](https://hopkinglobalhealth.org/assets/documents/CGH_Webinar_-_Contact_Tracing_(Final_Version).pdf).
- [18] Pinar Keskinocak, Buse Eylul Oruc, Arden Baxter, John Asplund, and Nicoleta Serban. The impact of social distancing on covid19 spread: State of georgia case study. *Plos one*, 15(10):e0239798, 2020.
- [19] William H Kruskal and W Allen Wallis. Use of ranks in one-criterion variance analysis. *Journal of the American statistical Association*, 47(260):583–621, 1952.
- [20] Ben Lopman, Carol Y Liu, Adrien Le Guillou, Andreas Handel, Timothy L Lash, Alexander P Isakov, and Samuel M Jenness. A modeling study to inform screening and testing interventions for the control of sars-cov-2 on university campuses. *Scientific Reports*, 11(1):1–11, 2021.
- [21] Christos Makridis and Jonathan Hartley. The cost of covid-19: A rough estimate of the 2020 us gdp impact, 2020.
- [22] Ken IM McKinnon. Convergence of the nelder–mead simplex method to a nonstationary point. *SIAM Journal on optimization*, 9(1):148–158, 1998.
- [23] Seyed M Moghadas, Meagan C Fitzpatrick, Pratha Sah, Abhishek Pandey, Affan Shoukat, Burton H Singer, and Alison P Galvani. The implications of silent transmission for the control of covid-19 outbreaks. *Proceedings of the National Academy of Sciences*, 117(30):17513–17515, 2020.
- [24] Stephen J Mooney and Vikas Pejaver. Big data in public health: terminology, machine learning, and privacy. *Annual review of public health*, 39:95–112, 2018.
- [25] Mark EJ Newman. Scientific collaboration networks. ii. shortest paths, weighted networks, and centrality. *Physical review E*, 64(1):016132, 2001.

- [26] University of Illinois at Urbana-Champaign. On-campus covid-19 testing, 2020. Available at: <https://covid19.illinois.edu/on-campus-covid-19-testing-data-dashboard/>.
- [27] Georgia Department of Public Health. Georgia department of public health daily status report, 2020. Available at: <https://dph.georgia.gov/covid-19-daily-status-report>.
- [28] Georgia Institute of Technology. Georgia tech launches campus coronavirus testing, 2020. Available at: <https://health.gatech.edu/coronavirus/testing-launched>.
- [29] Lawrence Page, Sergey Brin, Rajeev Motwani, and Terry Winograd. The pagerank citation ranking: Bringing order to the web. Technical report, Stanford InfoLab, 1999.
- [30] Betty Pfefferbaum and Carol S North. Mental health and the covid-19 pandemic. *New England Journal of Medicine*, 383(6):510–512, 2020.
- [31] Andreas Pfitzmann and Marit Hansen. A terminology for talking about privacy by data minimization: Anonymity, unlinkability, undetectability, unobservability, pseudonymity, and identity management, 2010.
- [32] John H Stone, Matthew J Frigault, Naomi J Serling-Boyd, Ana D Fernandes, Liam Harvey, Andrea S Foulkes, Nora K Horick, Brian C Healy, Ruta Shah, Ana Maria Bensaci, et al. Efficacy of tocilizumab in patients hospitalized with covid-19. *New England Journal of Medicine*, 383(24):2333–2344, 2020.
- [33] Berkeley University of California. Coronavirus dashboard testing, 2020. Available at: <https://coronavirus.berkeley.edu/dashboard/>.
- [34] Srinivasan Venkatramanan, Adam Sadilek, Arindam Fadikar, Christopher L Barrett, Matthew Biggerstaff, Jiangzhuo Chen, Xerxes Dotiwalla, Paul Eastham, Bryant Gipson, Dave Higdon, et al. Forecasting influenza activity using machine-learned mobility map. *Nature Communications*, 12(1):1–12, 2021.
- [35] Jessa Liying Wang and Michael C Loui. Privacy and ethical issues in location-based tracking systems. In *2009 IEEE International Symposium on Technology and Society*, pages 1–4. IEEE, 2009.
- [36] Shweta Ware, Chaoqun Yue, Reynaldo Morillo, Jin Lu, Chao Shang, Jayesh Kamath, Athanasios Bamis, Jinbo Bi, Alexander Russell, and Bing Wang. Large-scale automatic depression screening using meta-data from wifi infrastructure. *Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies*, 2(4):1–27, 2018.
- [37] Sarah Watson, Shawn Hubler, Danielle Ivory, and Robert Gebeloff. A new front in america’s pandemic: College towns, 2020. Available at: <https://www.nytimes.com/2020/09/06/us/colleges-coronavirus-students.html>.

- [38] Kim A Weeden and Ben Cornwell. The small-world network of college classes: implications for epidemic spread on a university campus. *Sociological science*, 7:222–241, 2020.
- [39] Bryan Wilder, Marie Charpignon, Jackson A Killian, Han-Ching Ou, Aditya Mate, Shahin Jabbari, Andrew Perrault, Angel N Desai, Milind Tambe, and Maimuna S Majumder. Modeling between-population variation in covid-19 dynamics in hubei, lombardy, and new york city. *Proceedings of the National Academy of Sciences*, 117(41):25904–25910, 2020.