# 1 **Comparison of Phase Angle Using Bioelectrical Impedance Analysis According to Device** 2 **Type and Examination Posture** 3 Running title: Comparison of multiple PhA using BIA 4 5 6 Jihyun Yang<sup>1</sup>, Byung Chul Chun<sup>2,3,4</sup>, Jeehyun Kim<sup>2,3,4</sup>, Jae-myeong Lee<sup>5</sup> 7 <sup>1</sup>Division of Nephrology, Department of Internal Medicine, Sungkyunkwan University School 8 of Medicine, Kangbuk Samsung Hospital, 29 Saemunan-ro, Jongno-gu, Seoul, 03181, Korea 9 <sup>2</sup>Department of Preventive Medicine, Korea University College of Medicine, Goryeodae-ro 73, 10 11 Seongbuk-gu, Seoul, 02841, Republic of Korea 12 <sup>3</sup>Graduate School of Public Health, Korea University College of Medicine, Gorveodae-ro 73, Seongbuk-gu, Seoul, 02841, Republic of Korea 13 <sup>4</sup>Transdisciplinary Major in Learning Health Systems, Department of Healthcare Sciences, 14 Graduate School, Korea University College of Medicine, Goryeodae-ro 73, Seongbuk-gu, 15 Seoul, 02841, Republic of Korea 16 17 <sup>5</sup>Division of Acute Care Surgery, Department of Surgery, Korea University Anam Hospital, Korea University College of Medicine, Goryeodae-ro 73, Seongbuk-gu, Seoul, 02841, Republic 18 of Korea 19

20

- 21 Corresponding author: Jae-myeong Lee, Division of Acute Care Surgery, Department of
- 22 Surgery, Korea University Anam Hospital, Korea University College of Medicine, Goryeodae-
- ro 73, Seongbuk-gu, Seoul 02841, Republic of Korea
- 24 Phone: 82-2-920-6622
- 25 E-mail: ljm3225@hanmail.net
- 26
- 27 Word count: 1440
- 28 Number of figures: 3
- 29 Number of tables: 2

#### 30 Abstract

**Background:** Bioelectrical impedance analysis (BIA) is gaining popularity as a body composition assessment tool for patients. Although it has been studied and validated in different populations, age groups, and clinical settings, including critically ill patients, there are concerns about BIA reproducibility and reliability in different device types and postures. This study aimed to evaluate the reliability of BIA according to different devices, postures, and lead types.

Methods: Cross-sectional observational data of 74 healthy volunteers (32 women and 42 men) were collected. We used two types of devices, three types of postures (standing, sitting, and lying), and two lead types (clamp lead and adhesive lead) to measure the whole-body phase angle (phA) at a single frequency of 50 kHz. The measurements were validated using the intraclass correlation coefficient (ICC) and Bland–Altman plot analysis.

**Results:** All phA measurements recorded with two types of devices, three different postures, and two types of leads were equivalent to each other (mean ICC = 0.9932, 95% confidence interval (CI) 0.9905–0.0053). The average mean difference in phA was 0.31 (95% CI 0.16– 0.46). The largest phA value was measured using BWA with an adhesive-type lead in the lying position. There were no differences between standing and sitting positions.

46 Conclusion: This is the first study to show the consistency and reliability of BIA in measuring
47 phA using different devices, lead types, and postures. This could provide the confidence that
48 BIA can be used in various clinical settings.

49

Keywords: Bioelectrical impedance analysis; Intraclass correlation coefficient; Bland–Altman;
 Comparison; Reliability

# 52 Introduction

Body composition measurements can be useful for improving health in the general population, 53 54 achieving the best performance in athletes, and predicting clinical outcomes and nutritional status in patients (1-3). Bioelectrical impedance analysis (BIA) is a representative method for 55 56 body composition analysis, using resistance values or impedance resulting from differences in electrical conductivity according to the biological characteristics of the tissues (4). It can be 57 used to evaluate body water composition during treatment planning and monitoring in patients 58 59 with fluid imbalance. BIA is becoming popular as a body composition assessment tool for patients (1). It has been studied in the general population, patients with malignancy, sarcopenia, 60 obesity, frailty, chronic kidney disease, or cardiovascular disease, as well as in patients in 61 62 surgical care, and intensive care units (5-15).

However, although BIA has always been a topic of discussion, several limitations have been noted, including the reliability of different algorithms, time of measurement, effect of eating or exercise prior to measurement, ethnicity, sex, and age (15–20). It has also been speculated whether similar/reliable results can be obtained with different devices, measurement methods, postures, and contact locations of the electrode, because of technical limitations (21,22). However, there are no clear data yet.

Various devices have been developed to measure BIA. Inbody<sup>®</sup> (Inbody Co., Ltd., Korea) used in this study is a product that can quantitatively evaluate water composition in the human body through the measurement of human impedance using multiple frequencies. This study was designed to examine the differences in the BIA method for measuring body composition using different devices, postures, and electrode lead types. We measured the phase angle (phA) at a single frequency of 50 kHz using different methods and analyzed and compared the results.

75

#### 76 Methods

#### 77 Study population

This cross-sectional observational study was conducted between May and August 2019. Data 78 79 were obtained from 74 healthy volunteers, including 32 women and 42 men (Supplementary Information). Written informed consent was obtained from all the participants. Patients who 80 were under 20 years of age, were pregnant, or had a pacemaker insertion before enrollment 81 82 were excluded. We used the BSM330 (Inbody, Seoul, Korea) to measure the body weight and height of the participants. We compared the different phA measurements. This study was 83 approved by the Korea University Institutional Review Board (IRB No. 2020AN0145), which 84 has been conducted according to the principles expressed in the Declaration of Helsinki. 85

86

#### 87 BIA measurement protocol/technique

The BIA method was applied as follows: The participants were asked to refrain from consuming 88 any drinks or exercising 4 h before the measurements to minimize disturbance of body fluids. 89 The participants were asked to remain in a standing position for at least 10 min at the beginning 90 of the test. Then, phA was measured for all participants in the standing position using a multi-91 frequency bioelectrical impedance analyzer (Inbody 970, Inbody, Seoul, Korea) with a grab 92 lead. The device was then changed to BWA 2.0 (Inbody, Seoul, Korea), and phA was measured 93 in the standing position, initially using a clamp lead, followed by an adhesive lead. The 94 participants were asked to switch to a sitting position and were given a 10-min break before the 95 96 next test. Thereafter, the participants were tested in the sitting position using both the clamp lead and the adhesive lead. Finally, the participants were switched to the lying position, and 97

98 after a 10-min break, they were tested using the clamp lead followed by the adhesive lead. It 99 took approximately 1 h to complete the entire sequence for each participant. Data on seven 100 measurement methods, including two devices, two lead types, and three postures, were 101 collected. This study was conducted in a single individual.

102

#### 103 Statistical analysis

104 We compared the results of the seven measurements using the two-way random effects. 105 absolute agreement, and single rater/measurement intraclass correlation coefficient (ICC) method. This implies that our measurement was conducted by a single rater who was selected 106 randomly, and the extent to which the measurements absolutely matched was evaluated (23). 107 108 ICC values greater than 0.90 imply excellent reliability, whereas values less than 0.5 indicate poor reliability (23). Bland-Altman plots were used to investigate the range of agreement and 109 bias between each measurement (24). Statistical significance was set at p < 0.05 for all analyses. 110 Statistical analyses were conducted using SPSS (version 26.0; IBM, Chicago, IL) and MedCalc 111 20.008 (MedCalc Software Ltd., Ostend, Belgium). 112

113

#### 114 **Results**

The baseline characteristics and average phase angles are presented in Table 1 and Fig. 1, respectively. The data were not normally distributed and are presented as median  $\pm$  range and mean  $\pm$  standard deviation.

118

# 119 ICC of the phase angle (phA)

The mean ICC of the 50-kHz whole-body phA was 0.9932 (95% confidence interval [CI]
0.9905–0.9953) (Fig. 2).

122

### 123 Differences between the seven measurement methods

We further explored the differences in the results using the Bland–Altman plot analysis (Fig. 3, Table 2). The mean difference in the phA was 0.31 (95% CI 0.16–0.46; minimum -0.24, maximum 1.035). No differences in phA were observed between the use of BWA 2.0, adhesive lead in the sitting position, clamp lead in the lying position, and the use of BWA 2.0, adhesive lead in the sitting and standing postures (both mean difference = 0.00, p = 0.95 and 0.99, respectively). The difference between the BWA 2.0 adhesive lead in the lying position and Inbody 970 was the highest (mean difference = 1.04, p < 0.001).

131

# 132 **Discussion**

In this study, we confirmed that the value of phA may not be the same for different devices,
postures, and electrodes; however, statistical analyses showed that these values exhibited
significant levels of consistency.

BIA measures the volume of fluid and its distribution in the human body using changes in the resistance of the current passing through the fluid with the solute. When this technology was first developed, a single frequency was used to measure the total volume of the human body under the hypothesis that the body has a homogeneous cylindrical structure and current passes through it via electrolytes and water. Since then, further technologies have been developed to measure extracellular and intracellular fluids separately using multiple frequencies, with low-frequency currents not passing through the cell membrane and high-

frequency currents passing through it (4). Based on extensive research along with continuous improvements in BIA devices, the European Society for Clinical Nutrition and Metabolism published guidelines for their utilization in clinical practice (20). Although BIA can be useful and appropriately applied in certain populations, particularly in the general population, it has several limitations. This study provides an answer to one of these limitations.

The Bland–Altman plot method only defines the intervals of agreements; it does not indicate whether these limits are acceptable. Acceptable limits must be defined a priori based on clinical necessity, biological considerations, or other goals (24). Using the Bland–Altman plot to compare each parameter, we identified statistically significant differences between the different methods of measuring body composition; however, no clinically significant difference was observed. Previous studies conducted in the general healthy population in Iran and Taiwan reported body phA of  $7.32 \pm 1.17$  and  $6.0 \pm 0.8$ , respectively (25,26).

Notably, Inbody 970 showed the smallest value and BWA 2.0, with the adhesive electrode in the lying position, showing the largest value. In addition, the measurement using BWA 2.0, with an adhesive electrode in the standing position, was the same as that with clamping in the sitting position. Because the exact equation is not disclosed, it is difficult to determine the cause of this difference. It is speculated that the adhesive electrode method may detect electricity flow and reflect the characteristics of the body components better than the clamping method, and that the lying position is the most stable.

This is the first study to present consistency in results between different methods of measuring body composition using statistical analysis. The strength of this study is that we directly compared the results of different methods for each subject. However, this study has some limitations. First, we did not compare dual X-ray absorptiometry, which is the gold standard for body composition measurements. Second, the measurements were conducted only

167	in Asian populations. Third, elderly individuals aged >75 years were not included, and the study
168	population comprised relatively middle-aged adults. Fourth, we did not compare all devices;
169	only two representative devices were used.
170	In conclusion, to the best of our knowledge, this is the first study to show the
171	consistency and reliability of BIA for measuring phA using different devices, lead types, and
172	postures. This study provides information that BIA measured values in various situations can
173	be used interchangeably.
174	
175	Conflict of interest
176	The authors declare that they have no competing interests.
177	
178	Funding
179	None
180	
181	Acknowledgments
182	Not applicable
183	

#### 184 **References**

- Dehghan M, Merchant AT. Is bioelectrical impedance accurate for use in large epidemiological studies? Nutr J. 2008 Dec;7(1):26.
- Campa F, Toselli S, Mazzilli M, Gobbo LA, Coratella G. Assessment of Body
   Composition in Athletes: A Narrative Review of Available Methods with Special
   Reference to Quantitative and Qualitative Bioimpedance Analysis. Nutrients. 2021 May
   12;13(5):1620.
- Mialich MS, Sicchieri JMF, Junior AAJ. Analysis of Body Composition: A Critical Review of the Use of Bioelectrical Impedance Analysis. International Journal of Clinical Nutrition. :10.
- Kyle U. Bioelectrical impedance analysis?part I: review of principles and methods.
   Clinical Nutrition. 2004 Oct;23(5):1226–43.
- Aleixo GFP, Shachar SS, Nyrop KA, Muss HB, Battaglini CL, Williams GR. Bioelectrical Impedance Analysis for the Assessment of Sarcopenia in Patients with Cancer: A Systematic Review. The Oncol. 2020 Feb;25(2):170–82.
- Di Vincenzo O, Marra M, Di Gregorio A, Pasanisi F, Scalfi L. Bioelectrical impedance analysis (BIA) -derived phase angle in sarcopenia: A systematic review. Clinical Nutrition. 201 2021 May;40(5):3052–61.
- Orsso CE, Silva MIB, Gonzalez MC, Rubin DA, Heymsfield SB, Prado CM, et al.
  Assessment of body composition in pediatric overweight and obesity: A systematic review
  of the reliability and validity of common techniques. Obesity Reviews.
  2020;21(8):e13041.
- Lee SW, Ngoh CLY, Chua HR, Haroon S, Wong WK, Lee EJ, et al. Evaluation of different
   bioimpedance methods for assessing body composition in Asian non-dialysis chronic
   kidney disease patients. Kidney Res Clin Pract. 2019 Mar 31;38(1):71–80.
- 9. Mullie L, Obrand A, Bendayan M, Trnkus A, Ouimet M, Moss E, et al. Phase Angle as a 209 Biomarker for Frailty and Postoperative Mortality: The BICS Study. J Am Heart Assoc 210 [Internet]. 2018 Sep 4 [cited 2021 Jun 24];7(17). Available from: 211 https://www.ahajournals.org/doi/10.1161/JAHA.118.008721 212
- Bansal N, Zelnick LR, Himmelfarb J, Chertow GM. Bioelectrical Impedance Analysis
   Measures and Clinical Outcomes in CKD. American Journal of Kidney Diseases. 2018
   Nov;72(5):662–72.
- Böhm A, Heitmann BL. The use of bioelectrical impedance analysis for body composition
   in epidemiological studies. Eur J Clin Nutr. 2013 Jan;67(S1):S79–85.
- Stuivenberg N. The use of bio-electrical impedance analysis (BIA) to guide fluid
   management, resuscitation and deresuscitation in critically ill patients: a bench-to-bedside
   review. 2014;46(5):11.

- Chung YJ, Kim EY. Usefulness of Bioelectrical Impedance Analysis as a Guidance of Fluid Management in Critically Ill Patients after Major Abdomen Surgery; a Single Center, Prospective Cohort Study. Surg Metab Nutr. 2020 Dec 30;11(2):53–60.
- Lee YH, Lee J-D, Kang DR, Hong J, Lee J. Bioelectrical impedance analysis values as
   markers to predict severity in critically ill patients. Journal of Critical Care. 2017
   Aug;40:103–7.
- 15. Segal KR, Gutin B, Presta E, Wang J, Itallie TBV. Estimation of human body composition 227 228 by electrical impedance methods: a comparative study. Journal of Applied Physiology 229 [Internet]. 1985 May [cited 2021 Jun 24]; Available from: 1 https://journals.physiology.org/doi/abs/10.1152/jappl.1985.58.5.1565 230
- 16. Wattanapenpaiboon N, Lukito W, Strauss B, Hsu-Hage BH-H, Wahlqvist M, Stroud D.
  Agreement of skinfold measurement and bioelectrical impedance analysis (BIA) methods
  with dual energy X-ray absorptiometry (DEXA) in estimating total body fat in AngloCeltic Australians. Int J Obes. 1998 Sep;22(9):854–60.
- Oshima Y, Shiga T. Within-day variability of whole-body and segmental bioelectrical
   impedance in a standing position. Eur J Clin Nutr. 2006 Aug;60(8):938–41.
- 18. Gallagher M, Walker K, O'Dea K. The infuence of a breakfast meal on the assessment of
  body composition using bioelectrical impedance. Eur J Clin Nutr. 1998 Feb;(52):94–7.
- 19. Deurenberg P, Weststrate JA, Paymans I, van der Kooy K. Factors affecting bioelectrical
  impedance measurements in humans. Eur J Clin Nutr. 1988 Dec;42(12):1017–22.
- 241 20. Kyle UG, Bosaeus I, De Lorenzo AD, Deurenberg P, Elia M, Manuel Gómez J, et al.
  242 Bioelectrical impedance analysis—part II: utilization in clinical practice. Clinical
  243 Nutrition. 2004 Dec;23(6):1430–53.
- 244 21. Mally K, Dittmar M. Comparison of three segmental multifrequency bioelectrical
   245 impedance techniques in healthy adults. Annals of Human Biology. 2012 Nov;39(6):468–
   246 78.
- 247 22. Genton L, Herrmann FrançoisR, Spörri A, Graf CE. Association of mortality and phase
  248 angle measured by different bioelectrical impedance analysis (BIA) devices. Clinical
  249 Nutrition. 2018 Jun;37(3):1066–9.
- 250 23. Koo TK, Li MY. A Guideline of Selecting and Reporting Intraclass Correlation
   251 Coefficients for Reliability Research. Journal of Chiropractic Medicine. 2016 Jun
   252 1;15(2):155–63.
- 253 24. Giavarina D. Understanding Bland Altman analysis. Biochem Med. 2015;25(2):141–51.
- 254 25. Kumar S, Dutt A, Hemraj S, Bhat S, Manipadybhima B. Phase Angle Measurement in
   255 Healthy Human Subjects through Bio-Impedance Analysis. Iran J Basic Med Sci. 15(6):5.
- 26. Lee L-W, Lu H-K, Chen Y-Y, Lai C-L, Chu L-P, Hsieh M-C, et al. Prediction and discrimination of skeletal muscle function by bioelectrical impedance vector analysis

using a standing impedance analyzer in healthy Taiwanese adults. Moran JM, editor. PLoS 258 ONE. 2020 Jun 12;15(6):e0231604. 259

# Table 1. Baseline characteristics of the participants

	All (n=74)	Men (n=42)	Women (n=32)	
Age (years)	34.5 ± 10.2	32.8 ± 8.6	36.6 ± 11.7	
	(31, 20–63)	(32, 20–63)	(32, 22–58)	
Height (cm)	169.1 ± 9.4	$175.4 \pm 6.2$	$150.7 \pm 5.66$	
	(169.5, 148–189.6)	(176,162–189.6)	(160.7, 148–171)	
Weight (kg)	69.5 ± 15.6	80 ± 10.7	55.7 ± 8.94	
	(72, 40–115.3)	(79.4, 53.9–115.3)	(54.9, 40.5–73.8)	
BMI (kg/m <sup>2</sup> )	24.1 ± 3.8	25.9 ± 2.7	21.6 ± 3.6	
	(24.5, 15.8–33)	(25.8, 20.5–33)	(20.4, 15.8–30.3)	
Phase angle				
Aly	6.8 ± 1.1	7.5 ± 0.9	5.9 ± 0.7	
	(6.8, 4.8–9.3)	(7.3, 5.8–9.3)	(5.8, 4.8–7.6)	
Asit	6.4 ± 1.1	$7.2 \pm 0.9$	5.5 ± 0.7	
	(6.5, 4.3–9.0)	(7.0, 5.4–9.0)	(5.4, 4.3–7.3)	
Astd	6.4 ± 1.1	7.1 ± 0.9	5.5 ± 0.8	
	(6.4, 4.3–9.0)	(7.0, 5.6–9.0)	(5.4, 4.3–7.3)	
Cly	6.7 ± 1.2	$7.4 \pm 0.9$	5.7 ± 0.7	
	(6.7, 4.6–9.2)	(6.9, 5.3–9.0)	(5.4, 4.3–7.2)	

Csit	$6.4 \pm 1.2$	$7.2 \pm 0.9$	5.4 ± 0.7
	(6.5, 4.3–9.0)	(6.9, 5.3–9.0)	(5.4, 4.3–7.2)
Cstd	$4.4 \pm 1.2$	$7.1 \pm 0.9$	5.3 ± 0.8
	(6.4, 4.2–9.0)	(6.9, 5.2–9.0)	(5.3, 4.2–7.1)
1970	$5.8 \pm 0.8$	$6.3 \pm 0.5$	5.0 ± 0.5
	(5.9, 4.1–7.5)	(6.3, 4.7–7.5)	(4.9, 4.1–5.9)

BMI, body mass index; Aly: BWA device, adhesive type lead in lying posture; Asit: BWA device, adhesive type lead in sitting posture; Astd: BWA device, adhesive type lead in standing posture; Cly: BWA device, clamp lead in lying posture; Csit: BWA device, clamp lead in standing posture.

Table 2. The difference between each 50-kHz 50kHz phase angle measurement according to

	Aly	Asit	Astd	Cly	Csit	Cstd	1970
Aly		0.36*	0.36*	0.12*	0.36*	0.44*	1.04*
Asit			0.00	0.27*	0.03	0.04*	0.68*
Astd				0.24*	0.00	0.08*	0.68*
Cly					0.24*	0.31*	0.91*
Csit						0.07*	0.67*
Cstd							0.6*
1970							

Bland–Altman B-A plot analysis

Aly: BWA device, adhesive type lead in lying posture; Asit: BWA device, adhesive type lead in sitting posture; Astd: BWA device, adhesive type lead in standing posture; Cly: BWA device, clamp lead in lying posture; Csit: BWA device, clamp lead in sitting posture; Cstd: BWA device, clamp lead in standing posture; \* p < 0.001.

Figure legends

Fig. 1. The average of seven different measurements of the 50-kHz phase angle.





Fig. 2. The comparison of intraclass correlation coefficient of 50-kHz whole body phase angle measured using different methods.



#### Fig. 3. The Bland–Altman plot analysis of different methods of measuring the 50-kHz phase angle.

BWA2.0

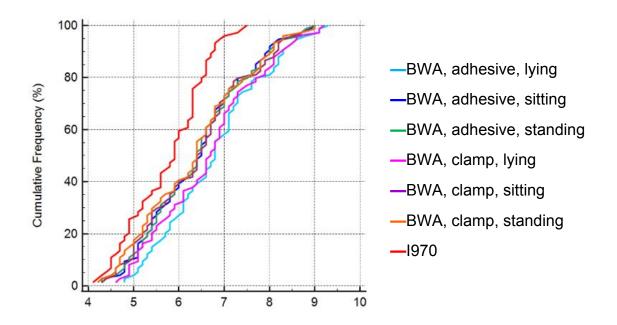