

# Ensemble Approaches for Robust and Generalizable Short-Term Forecasts of Dengue Fever. A retrospective and prospective evaluation study in over 180 locations around the world

Skyler Wu,<sup>1,2,\*</sup> Austin Meyer,<sup>2,3,\*</sup> Leonardo Clemente,<sup>2</sup>  
Lucas M. Stolerman,<sup>4</sup> Fred Lu,<sup>2</sup> Atreyee Majumder,<sup>5</sup> Rudi Verbeeck,<sup>5</sup> Serge Masyn,<sup>5</sup>  
Mauricio Santillana<sup>2,6,†</sup>

<sup>1</sup>Department of Statistics, Harvard University, Cambridge, MA, USA,

<sup>2</sup>Machine Intelligence Group for the Betterment of Health and the Environment,  
Network Science Institute, Northeastern University, Boston, MA, USA,

<sup>3</sup>Beth Israel Deaconess Medical Center, Boston, MA, USA,

<sup>4</sup>Department of Mathematics, Oklahoma State University, Stillwater, OK, USA.

<sup>5</sup>Global Public Health, Janssen R&D, Beerse, Belgium.

<sup>6</sup>Harvard T.H. Chan School of Public Health, Boston, MA USA.

\* These authors contributed equally to this work

†To whom correspondence should be addressed; E-mail: [m.santillana@northeastern.edu](mailto:m.santillana@northeastern.edu).

October 22, 2024

**Dengue fever, a tropical vector-borne disease, is a leading cause of hospitalization and death in many parts of the world, especially in Asia and Latin America. In places where timely and accurate dengue activity surveillance is available, decision-makers possess valuable information that may allow them to better de-**

sign and implement public health measures, and improve the allocation of limited public health resources. In addition, robust and reliable near-term forecasts of likely epidemic outcomes may further help anticipate increased demand on healthcare infrastructure and may promote a culture of preparedness. Here, we propose ensemble modeling approaches that combine forecasts produced with a variety of independent mechanistic, statistical, and machine learning component models to forecast reported dengue case counts 1-, 2-, and 3-months ahead of current time at the province level in multiple countries. We assess the ensemble and each component models' monthly predictive ability in a fully out-of-sample and retrospective fashion, in over 180 locations around the world — all provinces of Brazil, Colombia, Malaysia, Mexico, and Thailand, as well as Iquitos, Peru, and San Juan, Puerto Rico — during at least 2-3 years. Additionally, we evaluate ensemble approaches in a multi-model, real-time, and prospective dengue forecasting platform — where issues of data availability and data completeness introduce important limitations — during an 11-month time period in the years 2022 and 2023. We show that our ensemble modeling approaches lead to reliable and robust prediction estimates when compared to baseline estimates produced with available information at the time of prediction. This can be contrasted with the high variability in the forecasting ability of each individual component model, across locations and time. Furthermore, we find that no individual model leads to optimal and robust predictions across time horizons and locations, and while the ensemble models do not always achieve the best prediction performance in any given location, they consistently provide reliable disease estimates — they rank in the top 3 performing models across locations and time periods — both retrospectively and prospectively.

## 1 Introduction

Dengue fever is a tropical vector-borne disease threatening an estimated 3.9 billion people [62] over 141 countries [2], with cases doubling every ten years since 1990 [26]. Over 390 million infections arise each year worldwide, with severe dengue causing 25,000 deaths annually, mostly in children [2, 3]. For many parts of Asia and Latin America, dengue is a leading cause of hospitalization and death, especially among children [16]. It also causes more morbidity and mortality than any other arthropod-borne virus [9]. While dengue infections often presents with flu-like or otherwise mild symptoms [1], about 1 in 20 people infected with dengue will develop *severe dengue*, which can further develop into *dengue hemorrhagic fever* [3] — a very serious condition marked by capillary leakage leading to potentially significant organ impairment, multiorgan failure, and death [1, 3, 21, 28]. The ability to forecast dengue fever cases can provide public health officials with a more accurate picture of future disease dynamics, empowering decision-makers to implement public health measures and better allocate limited resources.

Over the past few decades, multiple approaches have been developed for dengue forecasting. Dynamic, mathematical models that incorporate knowledge of dengue virus transmission biology, historical incidence, and climatological factors have been developed to predict the evolution of dengue epidemics [11, 64, 20, 51]. However, the intricate nature of dengue dynamics poses a significant challenge, as mechanistic assumptions usually remain unclear — or hard to quantify —, and acquiring the data to parameterize models often proves impossible. More recently, data-driven methodologies to predict the severity of an upcoming seasonal outbreak — a classification problem — have experienced a surge in popularity due to the increasing availability of epidemiological and exogenous dengue-related data. These include methods such as  $k$ -Nearest-Neighbors, Logistic Regression, and various boosting methods [44]; or the identification of weather (temperature, rain frequency) patterns that may help anticipate years with high incidence [35, 57, 56]. Additionally, classical time series methods like SARIMA (and its variants) have been widely explored to forecast confirmed case counts over time [6, 18, 46, 59], as well as more complex, non-linear methods such as generalized additive models, artificial

neural networks, and exponential smoothing approaches [5, 6, 29, 46]. Other studies have explored the feasibility of leveraging Internet-based data sources such as Dengue-related Google search data [27, 50, 62], social media data [17, 33], and Wikipedia access logs [33] as additional predictors of Dengue activity.

The abundance of dengue forecasting methodologies presents a significant challenge for decision-makers and stakeholders who ultimately need a single set of reliable predictions to make informed decisions to protect their communities. Factors such as data availability, computational resources, and the desired level of accuracy further complicate the decision-making process. Therefore, navigating the array of forecasting methodologies requires careful consideration and expertise to ensure effective dengue prediction and response. Additionally, each model has its own limitations [18, 43], including robustness to variability in data quality and sensitivity to different outbreak phases, which can lead to inconsistent predictions.

Ensemble methods that intelligently and adaptively combine the predictions of multiple component models into a single prediction may be more robust alternatives for disease forecasting. For example, previous studies have used averaged and weighted-averaged ensembles combining models such as SARIMA, vector autoregression, neural networks, and linear regression to nowcast and forecast dengue in Brazil and India [23, 53]. Similar ensembling approaches combining models such as the Method of Analogues, Holt-Winter models, and Bayesian generalized linear mixed models, among other historical models, have shown promising results in Iquitos, Peru [8], and Vietnam [12]. Chakraborty et al. directly combined ARIMA and neural networks to forecast dengue in San Juan, Iquitos, and the Philippines as a composition of linear and non-linear signals [10]. Mahajan et al. use a gradient-boosting super-ensemble to combine ARIMA, exponential smoothing, and neural network for forecasting dengue in Hong Kong [32]. Ensemble models intentionally involving strong and weak learners to reduce over-fitting have also shown good predictive performance in Bangkok and Chiang Mai, Thailand [24].

However, the studies referenced above are (1) individually limited in their geographic scope

—to study a few locations within a country at a time—, (2) they only focus on a few model choices as potential ensemble components, and (3) they were in all cases implemented retrospectively. The latter implies that issues of data availability, data completeness, and other challenges that emerge in real-time forecasting efforts were not at all considered [34]. As such, the approaches described are not guaranteed to generalize as robust, ready-to-use methodologies globally, in real-time and prospective forecasting efforts.

We would like to highlight that the challenges of the real-time implementation of disease forecasting systems have been documented extensively, and they are still the backbone that motivate multiple research studies ([37, 31, 54]). In fact, public health systems typically experience severe lags in reporting [13, 36], and reported case counts for a given month may be updated many times in the following months (this is commonly referred to as “backfill”) [50]. While some methods for addressing these data quality and backfill issues have been proposed [15], for example — methods that attempt to learn backfill patterns [22, 37] and methods that introduce auxiliary data sources [45] to improve forecasts; we did not include in our real-time prediction pipeline a comprehensive set of approaches to address these issues. Instead, we evaluated the ability of our machine learning-based ensemble methods to lead to improved or consistent forecasts in the presence of these challenges.

The primary prediction task addressed by this manuscript is the short-term forecast of reported dengue fever case counts one to three months ahead in province-sized localities. The main contributions of this work are twofold. First, we retrospectively formulate a family of ensemble system pipelines — comprised of multiple structurally heterogeneous individual component models — that generate more robust and accurate forecasts compared to their individual component models. Specifically, we include the following 11 diverse classes of individual component models as potential inputs to our ensembling pipelines: autoregressive (AR); autoregressive with Google Trends data as exogenous covariates (ARGO [63]); three variants of vector autoregression (NetModel and two variants of VAR [41] — VAR (Reg.) and VAR (Clust., Reg.); a combination of ARGO and NetModel (ARGONet [31]); a novel, mechanistic, repurposed dynamically-trained SIR; a classical error-trend-seasonality model (ETS); a mini-ensemble of

machine learning methods (Stacked ML); a baseline naive persistence model; and a baseline seasonal model. We exhaustively demonstrate across 180+ province-sized locations that our ensemble models not only incur lower percent absolute errors on average compared to their individual component models (though such improvements may be modest), but also, and more importantly, they produce top performing forecasts (typically in the top three) more consistently than any individual model.

The second contribution of this study is the evaluation of a real-time dengue activity forecasting platform implemented as a prospective tool to identify when and where an upcoming dengue outbreak would be experienced 1, 2 and 3 months into the future. These predictive efforts were implemented as a decision-making support tool to guide the allocation of resources for prospective clinical trials in all provinces of Brazil, Colombia, Malaysia, Mexico, and Thailand. The ensemble techniques were assessed using a different set of component models that were chosen based on their suitability to be implemented in the presence of multiple data availability and data incompleteness issues. These models included: KNN, VAR (Reg.), Support Vector Machines (SVM), and SARIMA. The scope of our study and the consistency of our analyzes suggests that our ensemble approaches are generalizable across geographically diverse locations and individual component models, and thus may become a reliable first choice for forecasting teams who are interested in communicating concisely with public health officials and other decision makers[54].

## Results

We evaluated the performances of eleven optimized component models and two selected ensemble models on forecasting reported dengue cases in over 180 province-sized locations worldwide in Brazil, Colombia, Malaysia, Mexico, and Thailand. Specifically, we retrospectively assessed each model's ability to forecast reported dengue cases 1-, 2-, and 3-months ahead into the future, with performance quantified using Percent Absolute Error (see Supplementary Ma-

terials).


For each location, we partitioned the available data into distinct training and test periods. During the training phase, we engaged in a hyperparameter optimization for each component model, and two versions of optimal hyperparameters for our ensembles: a 'Country' set of hyperparameters (using the same set of hyperparameter with best on-average performance across all locations within a country), and a 'Overall' (using the set of hyperparameters that, on average, best performed within all the locations in the study). Following this stage, we proceeded to generate out-of-sample forecasts utilizing the designated test period. It is important to note that due to the varied availability of epidemiological data across different regions, the time periods for analysis varied from country to country. For specific details on the analysis period for each country, please consult Table 2.

We present our main results in the following way: First, we observe the heterogeneity in the performance of each of our component models in Figure 1, which presents a summary of the performance of each model across each country, and each horizon of prediction. Then, in Figure 2 we focus specifically on the capacity of the ensemble models to consistently succeed in generating reliable forecasts, independent of the location where they are trained on. Finally, we present an overview of the error reduction of each component model, emphasizing the consistency of the ensemble techniques to reduce error across locations.

Component model performance were significantly dependent on the location. Our results, summarized in Figure 1, present a table with the percent absolute error ranking (PAE) distribution for each model within Sections B through F (one for each country). Each row within the table represents a distinct model, while columns denote their respective rankings (1st, 2nd, 3rd, etc.). For instance, for Brazil, the first entry of the table indicates that the model 'Ensemble (Country, EW)' secured the lowest PAE, achieving first place in 7 out of 27 locations across the country. The tables showcase the top-performing model in terms of this ranking, listed in descending order. We found that our ensembles, including the 'Country' and 'Optimized' versions of the 'Equal Weights' (EW) ensemble, and 'Country' and 'Overall' 'Performance Based Weights' (PBW) tended to be in the top positions within our ranking tables across all hori-

zons for Brazil, Colombia, Mexico, and Thailand (see the Methods section for details on the ensemble approaches). In the case of Malaysia, the EW ensemble appeared in the 6<sup>th</sup> position (almost half of the participating models). The Vector Autoregression (VAR) also consistently appeared in top positions for each of the ranking matrices for each country. On the other hand, the positioning of each of our component models varied from country to country. A country-by-country description, along with additional results for San Juan, Puerto Rico, and Iquitos, Peru can be found in the Supplementary Materials. We relegate Puerto Rico and Peru to the Supplementary Materials, since we only have one location in each of these regions, which does not facilitate interprovince analyses.



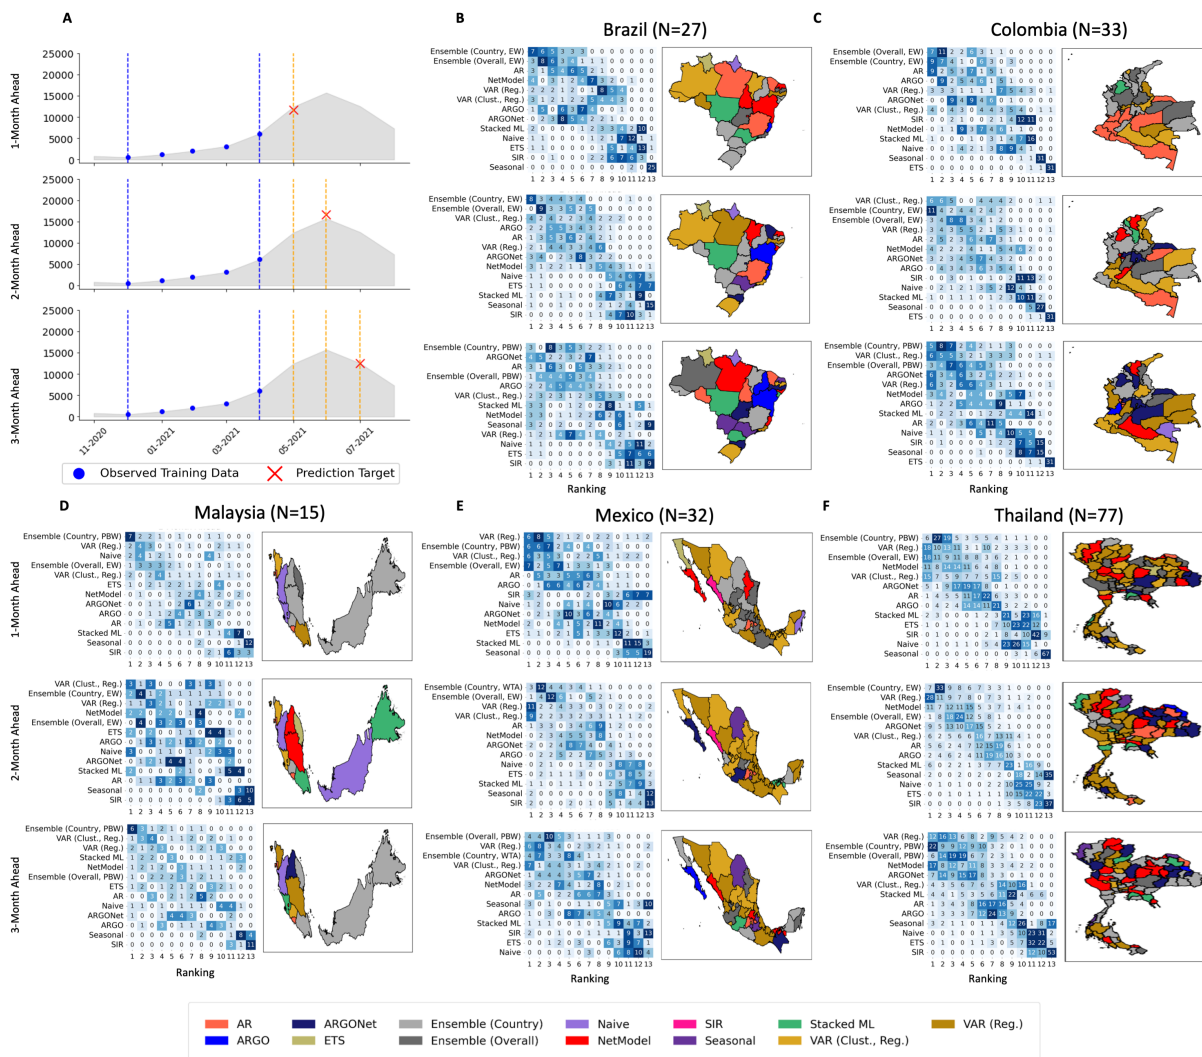


**Figure 1: Country-specific optimized individual and ensemble model performance rankings.** (A) Graphical representations of the 1-, 2-, and 3-month forecast horizons that we explore in this paper. The red X marks our forecasting target  $n$ -months ahead, the blue dots represent the historical cases that we are using as our observed training data (in this case, a 5-month sliding window), the vertical blue dotted lines represent the limits of our training data range, and the grey silhouette represents the ground truth reported case counts. (B) - (F) Within each country and forecast horizon, the heatmaps show the rankings distribution for each individual and ensemble model's forecasts in terms of percent absolute error. The geographic maps next to each heatmap indicate the best-performing model in each province, color-coded by the legend at the bottom of the figure.

## **Ensemble models consistently achieve the most top performance rankings compared to any individual model.**

Our second main result is that the country-specific and overall ensembles consistently perform among the top 3 relative to the individual component models. Moreover, averaged across all locations, two ensemble variants incurred the lowest prediction error compared to all other component models. Fig. 2 shows the forecasting performance of both individual and ensemble models across all 187 tested locations. In panel (A), we provide one example emphasizing the advantages of using ensembles over component models. For the 1- and 2-month ahead horizons, the best country-specific ensemble used equal weights (EW) for all component models when producing an ensemble forecast at each timestep, while at the 3-month ahead horizon, the best country-specific ensemble used performance-based weights (PBW), where the weightings of the component models were determined based on which component models performed the best in the recent past. Specifically, at the 1- and 2-month ahead forecast horizons, the ensemble model predicted the ground truth (grey silhouette) much more closely and with less variance than that of its component models, which tended to display more significant oscillation relative to the ground truth. At the 3-month ahead horizon, the ensemble and its component models tended to produce less accurate predictions in this specific example. Given the broad geographical scope of our study, these findings suggest that ensemble models are a suitable default choice for generalizable and robust forecasts.

The heatmaps in Fig. 2 (B) show that the country-specific and overall ensembles had the most locations where they performed in the top 3 rankings in terms of percent absolute error, followed by regularized VAR and clustered + regularized VAR, out of the 187 tested locations. At the 2-month ahead horizon, country-specific ensembles still garnered the most top 3 rankings, but regularized VAR seemed to garner more top 3 rankings than the overall ensemble. At the 3-month ahead horizon, the country-specific and overall ensembles again attained the greatest number of top 3 rankings, followed by regularized VAR. While ensembles may not always be the absolute winner in every tested location, overall, they consistently placed on the top 3 rankings, being reliable and robust model choices. From the geographical maps in panel (C),

ensemble models performed in the top 3 rankings in a vast majority of all 187 locations tested, as indicated by most of the maps being colored yellow. We found only a few consistent exceptions to this rule primarily in central Brazil and Colombia. These maps again corroborate the finding that ensembles are an effective option for stakeholders.

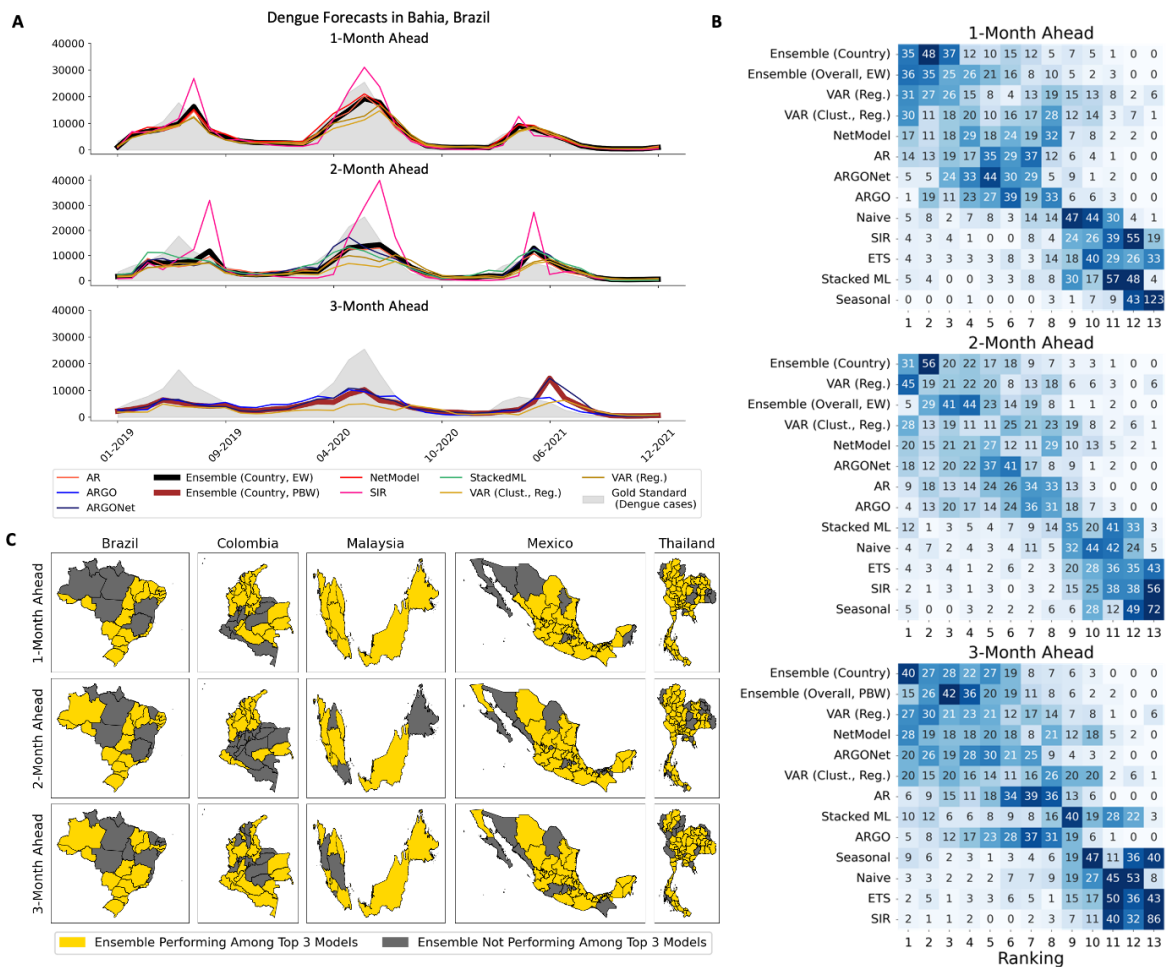

**Figure 2: A summary of our prediction tasks and optimized model performances across 187 locations. (A)** An example of our fine-tuned country-specific ensemble variants' forecasts compared to their optimized component models in one selected location — Bahia, Brazil. The gold standard ground truth of reported dengue cases is shown as the grey silhouette. Ensemble predictions are shown in thick, bolded lines, while component models are shown in thinner, colored lines. **(B)** Heatmaps of the number of locations where each model attained a specific ranking in terms of mean absolute error with respect to the ground truth reported dengue case counts across all 187 locations. **(C)** Geographical maps of Brazil, Colombia, Malaysia, Mexico, and Thailand showing provinces where either the country-specific or overall ensemble performed in the top 3 rankings for each location (in yellow) and where they did not (in grey).

## **Ensembling also yields improvement in error distributions across locations.**

We analyzed the potential error reduction of our ensemble models with respect to individual models. Our results are displayed in 3, which shows the percent absolute error distributions for the individual and the ensemble models in the 187 locations tested. Fig. 4 shows the same percent absolute error distributions of the individual and ensemble models within each country and forecast horizon.

**Overall performances** Despite the minor reduction in some cases, the country-specific and overall ensembles had the lowest mean percent absolute errors compared to all other models across all forecast horizons. Fig. 3 (A) to (C) displays the error distributions for each model, across the 3 different horizons of forecast. In all cases, we can observe that the Ensemble models were placed as the top performers, reaching values of 38.5%, 54.5% and 62.7% in terms of Percent Absolute Error (% AE). The next best model were there VAR variants (one incorporating regularization, and other implementing both regularization and clustering), reaching values of 40%, 55% 64%, for each respective task.

**Performance by country** Fig. 4 shows the performance per country. Notably, an ensemble variant achieved the lowest mean percent absolute error in 14 out of 15 tested combinations of forecast horizon and country. The sole exception was Colombia at 2-months ahead, with clustered + regularized VAR having achieved the lowest mean percent absolute error. However, the mean percent absolute errors and the shapes of the errors' distributions are very similar for the top-performing models. Nonetheless, our analyses shown in this figure still confirm that the ensembles were greater than the sum of their component models, even when looking only within a particular country.

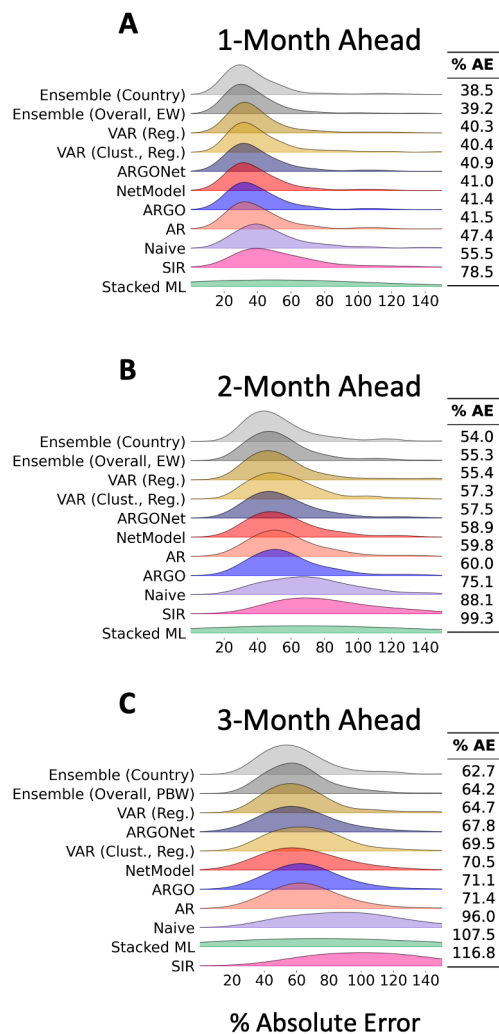


Figure 3: Overall error distributions for optimized individual and ensemble models across all 187 tested locations. (A) - (C) Ridgeline plots show percent absolute error distributions at the 1-month, 2-month, and 3-month horizons, respectively. Side tables record the mean percent absolute error incurred.

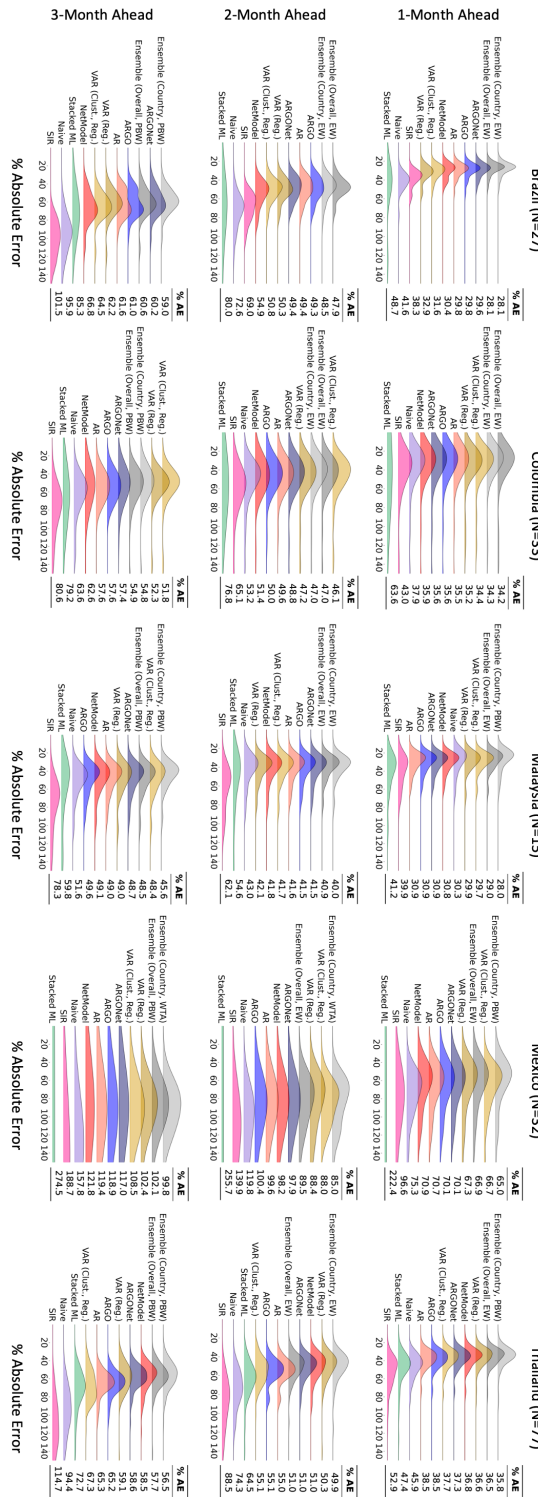


Figure 4: Country-specific error distributions for optimized individual and ensemble models, organized by country and forecast horizon. Ridgeline plots show percent absolute error distributions at the 1-month, 2-month, and 3-month horizons. Side tables record the mean percent absolute error incurred.

## Prospective Study: a real-life application and analysis of our methodology

In this section, we evaluate the performance of our forecasts generated by a real-time dengue activity forecasting platform. This platform was designed as a prospective tool to predict where dengue outbreak activity would occur 1, 2, and 3 months into the future. There are two primary differences between our retrospective and prospective studies. First, the prospective study was conducted in a real-world scenario where future ground truth data was unknown, whereas, in the retrospective study, we had access to the entire time series beforehand. Second, due to reporting delays in dengue case data, our prospective predictions did not utilize the most up-to-date epidemiological data. In contrast, the retrospective predictions were made using the most complete datasets available. This evaluation covered various locations in Brazil, Colombia, Mexico, Thailand, and Panama from May 2022 to July 2023. The forecasting models included Support Vector Machine (SVM), K-Nearest Neighbors (KNN), a regularized version of Vector Autoregression (VAR), and Seasonal Autoregressive Integrated Moving Average (SARIMA). Our ensemble models comprised a weighted ensemble, which assigned weights based on the mean squared error score of each model over the past six months, and a winner-takes-all ensemble, which selected the prediction from the 'best' base model with the least mean squared error over the past 3 months. Additionally, we used Persistence as our baseline model.

Figure 5 and Table 1 show a summary of the number of times our ensemble's Mean Squared Error was among the top 3 best over all the locations within a Country (the analysis was repeated over each forecasting horizon). We also present the overall error reduction of each model with respect to persistence ( $\frac{ERROR_{model}}{ERROR_{persistence}}$ ) using a set of violin plots. We conducted the analysis for each location and each country (Figure 6).

### Top 3 Analysis

Figure 5 shows the number of times a model reached within the top 3 Mean Squared Error reductions, for each country and each horizon. Each barplot represents the performance of a model within a Country, for a different prediction horizon. We can see VAR appearing eight



Top 3 overview	
Weighted Ensemble	3318
VAR (regularized)	2989
Winner Takes All	2310
SARIMA	1638
KNN	1519
SVM	1512
Persistence	658

Table 1: Summary of the number of times a model scored a Mean Squared Value among the top 3 best, across every location, and every horizon. Our results show that our weighted ensemble, VAR and Winner takes all approach are among the top performers.

times on the leftmost side (40%), and our Weighted Ensemble appearing seven times(35%). Our Winner-Takes-all approach appeared only two times on the leftmost side (10%), but had a comparable count with the top model whenever it was on second position (see Thailand in horizon 1, Panama in Horizon 1 and 4, Brazil in horizon 1, and Mexico in Horizon 1 and 2). Overall, most of our base models and ensembles had a higher count than persistence, with exception to Colombia in horizon 1, Panama in horizon 2, and Mexico in Horizon 1. Table 1 shows a total count over all locations, and all horizons. Our weighted ensemble had a total of 3318 counts, followed by VAR with 2989 and Winner-Takes-All with 2310 counts.

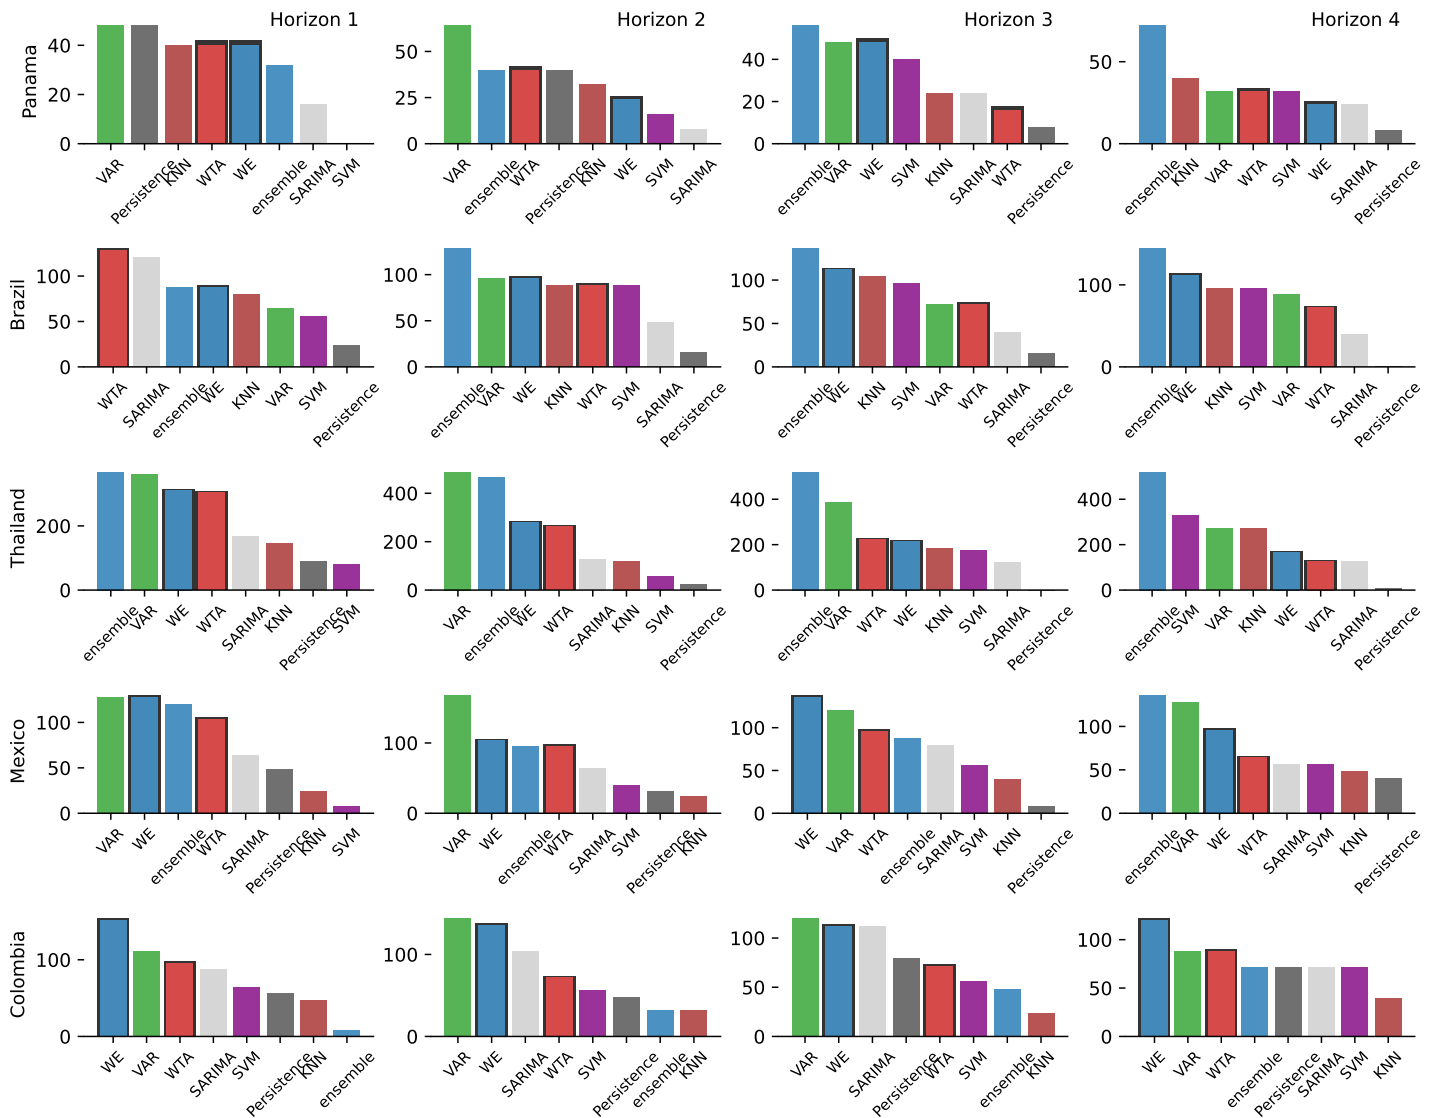


Figure 5: **Top performer count.** A visualization of the number of times a model scored a value of MSE rated among the top 3 best, ordered from left (models with the highest count) to right (models with the lowest count). Our results show that the Weighted Ensemble (blue), VAR (green), and the Winner-Takes-All approach are frequently among the top performers (leftmost side).

### 1.0.1 Overall Error reduction

Figure 6 exhibits a summary of the error reduction for the analyzed models with respect to the Persistence model ( $\frac{ERROR_{model}}{ERROR_{persistence}}$ ). The violin plots are ordered so that the best model is to the rightmost side, and a dashed horizontal line plotted at  $y = 1$  ( $y = 1$  means the error of our model is equal to the error of Persistence) serves as a reference to know if a model consistently beat persistence or not.

The weighted ensemble (WE), vector autoregression and the winner-takes-all (WTA) ensemble were the three models that most frequently scored within top-3 error reduction. We observe that the weighted ensemble had median error reduction within the top 3 at every location and time horizon, except Panama in horizon 1. Regularized VAR scored the biggest error reduction in Colombia and Thailand for horizons 1,2, and 3, 4. Although less frequently, the Winner-Takes-All ensemble also remained within the top 3 performances with exception to Thailand in horizon 4, Panama in horizon 3 and 4, and Mexico in horizon 3 and 4.

Efficiency per model, per location


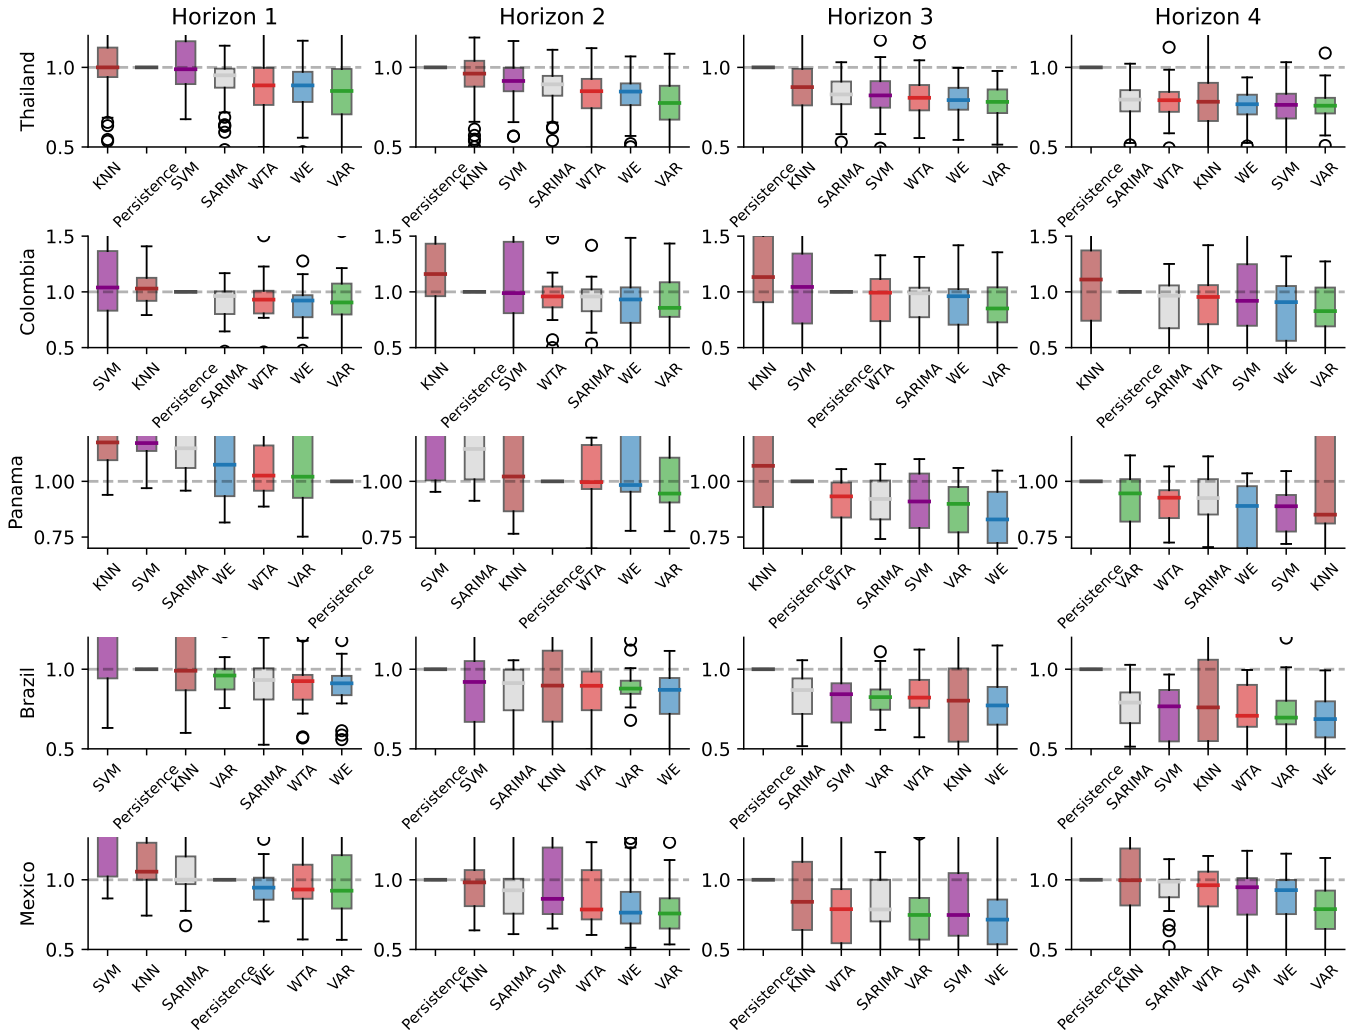


Figure 6: **Error reduction with respect to the Persistence model.** Summary of the error reduction of each model with respect to the Persistence baseline model. Each plot represents a different horizon (columns) and country (rows). Each violin plot visualizes a summary of the error reduction scores ( $\frac{ERROR_{model}}{ERROR_{persistence}}$ ) for a single model. Models are ordered from worst (left) to best (right). The gray dashed line represents the value of persistence and serves as a reference to validate if a model improved over the baseline.

## **Impact of reporting delays in our model's performance**

In conducting the prospective analysis, our forecasts were generated in a real-time scenario where the ground truth for each location was not fully reported at the time of prediction. The performance of our models were therefore likely affected by backfill issues in the data. Figure 7 illustrates our forecasts within the region of Sergipe, Brazil. At the time of prediction, the available information on confirmed cases (depicted in dark gray) differed from the most recently reported data (shown in light gray), which we employed as our ground truth for final metrics and error scores. Such backfill issues significantly impact real world applications as our models are trained solely on the information available at the given point in time.

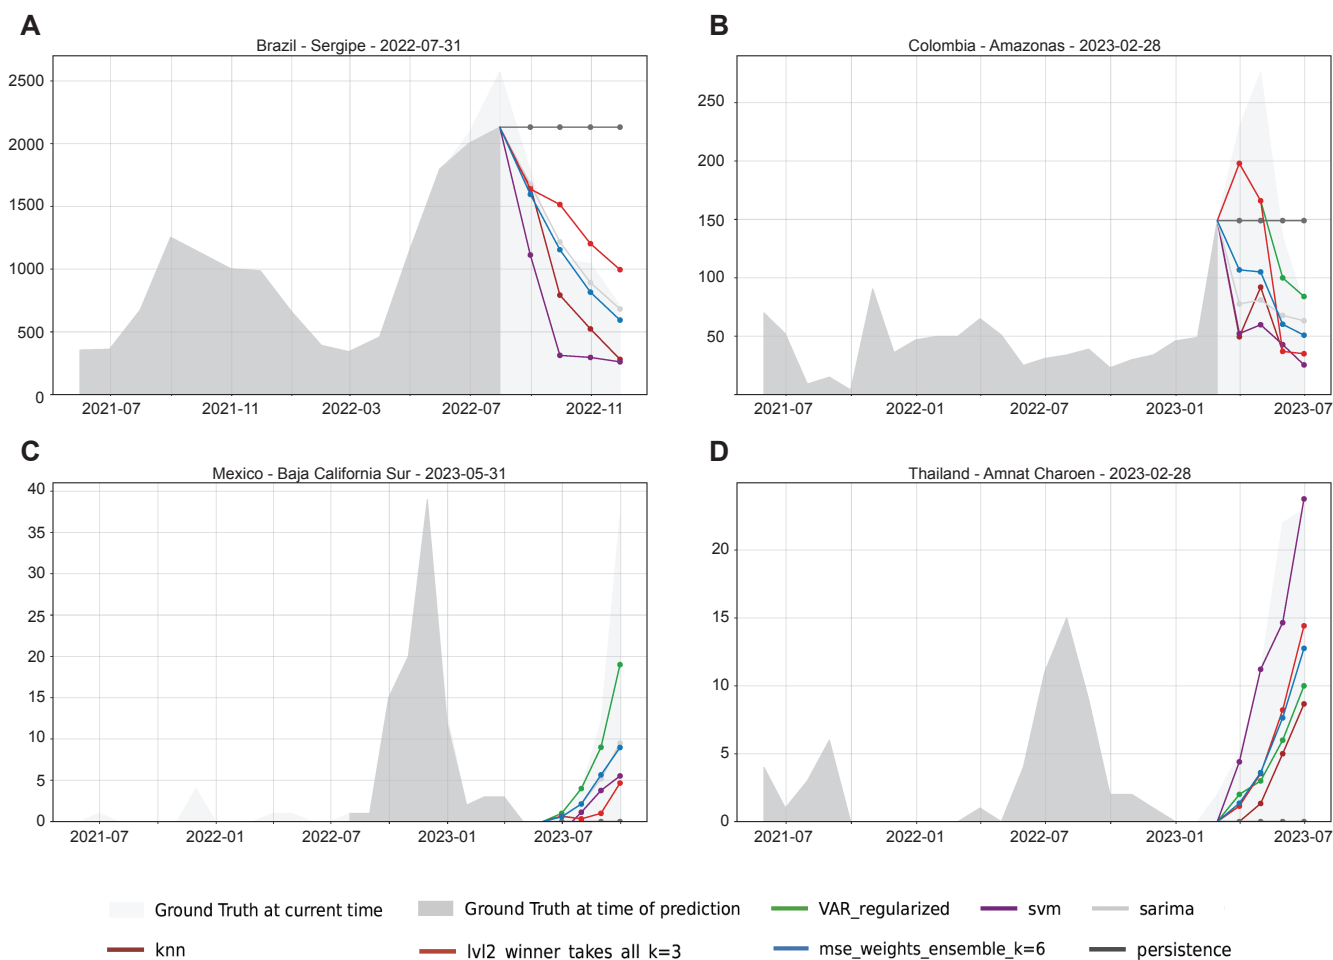

**Figure 7: Visualization of the bias embedded in our models given reporting delays.** The official reports known at the time of prediction, shown in dark gray, is the only information available to our models at the time of prediction. After several months, the ground truth changes due to backfill efforts based on the most recent reports are shown in light gray.

## Discussion

Dengue is a leading cause of hospitalization and death for many people around the world [16], and with cases doubling every ten years [26]. An essential component of dengue control is disease forecasting. Enhancing the accuracy and robustness of predictive models, particularly across multiple diverse geographical localities, empowers public health institutions to adopt a more proactive approach towards curbing the spread of the disease.

We tackled the task of predicting reported dengue fever case counts one, two, and three months ahead in various province-sized locations around the worldwide. Since individual model performances typically fluctuate across locations, there is a need for more robust and generalizable forecast models. In this context, our first contribution was the development of a family of ensemble models that retrospectively produced more accurate forecasts than their components across a broad range of geographically and socially diverse locations. Specifically, we investigated eleven types of data-driven, statistical, and mechanistic models as potential components of our ensemble. We also explored three ensembling mechanisms — performance-based weights, winner-takes-all, and simple average — and found that our ensemble models achieved lower percent absolute errors across 180+ geographically diverse locations. Our second contribution was a real-time dengue forecasting platform to predict when and where outbreaks will occur 1, 2, and 3 months in advance. Our forecasts were made in real-time without complete ground truth for each location. In fact, this task is not the same as performing retrospective studies, since dengue case data are typically updated months later (a problem commonly referred to as “backfill”). In this challenging scenario, our ensemble models still emerged as the top performers, producing better forecasts and reducing error compared to individual components.

Our ensemble models were robust predictors of dengue across the world. This fact is especially relevant because, as shown in Fig. 1, no individual model consistently achieved the lowest error. By contrast, while country-specific and overall ensembles were not always the best-performing models at a given location and forecast horizon, they almost always incurred

the most top 3 performers compared to any of the component models. As shown in Fig. 3, our ensemble variants incurred the lowest error averaged across all 180+ tested locations in terms of percent absolute error compared to the component models. Even looking within a particular country and forecast horizon, as shown in Fig 4, ensemble models achieved the lowest error averaged across all locations within that country in 13 out of 15 combinations of country and forecast horizon. The two exceptions were Colombia at 2-months and 3-months ahead. Furthermore, in 9 out of 15 country-horizon combinations, both the country-specific and overall ensembles achieved the top 2 lowest errors averaged across locations. In our prospective study, the weighted ensemble (WE) model was overall the top performer in terms of low mean squared error, followed by VAR and the Winner Takes All (WTA) ensemble (Table 1). In terms of error reduction with respect to the persistence model, WE and WTA also consistently performed within top-3 performers across locations.

It is worth addressing the excellent performance of our VAR model in both retrospective and prospective studies. Examining our results more granularly, from Fig. 4, we observe that in Colombia, at the 2-month ahead horizon, VAR (Clust., Reg.) achieved more top 3 rankings than both ensemble variants. At the 3-month ahead horizon, VAR (Clust., Reg.) not only outperforms the overall ensemble in terms of the number of top 3 rankings but achieves more top 1 rankings than both ensemble variants. Similarly, at least one VAR model also outperforms at least one ensemble variant in terms of the number of top 3 rankings in all three forecast horizons of both Malaysia and Thailand. We hypothesize that VAR's stellar performance in Colombia, Malaysia, and Thailand can be significantly attributed to the fact that these three countries are "province-dense" in the sense that individual provinces are relatively geographically small and, by extension, extremely close to each other. For example, Thailand has 77 provinces compacted into a relatively-small total surface area. In contrast, Brazil has 27 provinces spread out across a much larger area. The consequence of this geographical difference is that population centers between Brazilian provinces are much farther apart, and thus network effects are much weaker than their Thai counterparts. As such, VAR is much more effective in Thailand than Brazil because there are significantly stronger network effects between provinces to capture in our models.



We also investigated component models that were not exhaustively hyperparameter tuned but rather deployed straight out of the box, which we refer to as “standard” models. For details, we refer the reader to our Supplementary Information. As shown in Figs. 12 and 14, while our standard component models are nearly all unable to outperform our naive persistence baseline in terms of percent absolute error as averaged across locations, our ensemble models comprised of these standard component models outperformed the naive persistence baseline consistently. As such, our ensembling approach can take relatively weak, unoptimized learners and output a much stronger and more robust prediction. In this sense, the ensemble still performs better than its components.

From Tables 6 - 8 in the Supplemental Materials, we observe that when forecasting 1-month and 2-months ahead, the ensembling method most commonly employed (albeit plurality, not majority) was the equal weights method, followed by the performance-based weights model. At 3-months ahead, however, the performance-based weights mechanism was employed in most countries, including the overall ensemble. There does not appear to be a clear trend with respect to the ensemble training window sizes used to fit the performance-based weights and winner-takes-all ensembles.

Since the success of our forecasts is measured by achieving a lower percent absolute error than the naive persistence baseline model, ensembling enables us to include the naive persistence model itself as a component. As shown in our standard model results in the Supplementary Materials, we observe that when working with standard, non-fine-tuned component models, nearly all of the best country-specific and overall ensembles were comprised of the naive and seasonal basic models, coupled with one or two other models. From a bias-variance tradeoff perspective, the naive persistence model has very low variance, given its absence of tunable parameters. While other component models may overfit to noise and thus incur large errors, the naive persistence, by being simple, provides a stable component to the ensemble and thus allows the ensemble to outperform the other models, including its components.

One limitation of our work is that of the eight non-basic models that we include as potential components into the ensemble, six of them — AR, ARGO, ARGONet, NetModel, VAR (regular-

ized), VAR (clustered + regularized) — can be interpreted as belonging to a common family tree of linear models involving autoregressive terms. In fact, we did not include many models in our analyses that were non-linear with respect to historical (logged) reported case counts, and our resultant ensembles may not be expressive enough. In the future, one could consider including more expressive but also more heavily-parameterized models such as Random Forests [65] and neural networks [4, 65] into our ensemble lineup to potentially increase performance. However, as explored in [4], heavily-overparameterized neural networks may underperform compared to simpler regression models at short-term disease forecasting tasks. One could also include additional traditional time series forecasting techniques like Holt-Winter, as explored in [52], into the ensemble lineup for extra non-linear models. With the exception of ARGO and ARGONet, all of our models were trained exclusively using historical dengue-reported case counts. Future work could include models that leverage climate data and earth observations into our ensemble lineup, as explored in [12].

Despite our efforts to forecast dengue cases in over 180 locations worldwide, there are still many other countries, especially in the Americas and Asia, where we can retrospectively and prospectively test our individual and ensemble models. Our methodology can also be easily extended to support uncertainty quantification. Please see our Supplementary Materials for additional details and proofs-of-concept of such an extension. Future studies could explore classification tasks of predicting whether a given location will experience an outbreak by thresholding our case count predictions. Methods like DT-SIR, while prone to over-predicting at outbreak peaks, are still excellent at capturing the outbreak progression trend. Another interesting research avenue involves combining regression and classification components together within ensembles. For example, one can consider an ensemble setup containing both regression models (predicting the number of dengue reported case counts) and classification models (predicting whether an outbreak will occur in the next months). Future work could also involve combining ensembles together into superensembles to further reduce variance.

## 2 Methods

### 2.1 Data Sources

In this section, we present our data collection and processing routines.

#### Reported Case Counts

We used two primary modalities of data to train our models. Raw weekly and monthly reported dengue case counts at the city and province levels were obtained from the following sources. For Brazil, data was obtained from SINAN (using the `Datasus` package in R) and from the Info Dengue website API (at <https://info.dengue.mat.br>). Data from both sources were reformatted and merged into a single data set. Area codes were translated to state and municipality names. For Thailand, National Disease Surveillance Reports were downloaded from <http://doe.moph.go.th>. Separate files are available for dengue fever, DHF, and DHF shock syndrome. Files were processed in R, reformatted and combined into a single data set. For all other countries, PDF-formatted reports were downloaded from the Ministry of Health websites (for Colombia: <https://www.ins.gov.co>; for Malaysia: <https://www.moh.gov.my>; for Mexico: <https://www.gob.mx>; for Peru: <https://www.dge.gob.pe> and for Puerto Rico: <https://www.salud.gov.pr>). Tables containing dengue case data on a regional level were identified and extracted using ABBYY FineReader PDF software, applying OCR where required, and saved to excel. Extracted tables were then processed in R, checking extracted region names and count values using regular expressions and verifying table totals where available. All tables were time-stamped with the date of the report they were extracted from, reformatted and combined into a single data set per country. Data at the city level were aggregated via summation into province-level resolution before input into our model training pipeline. All data at the weekly level were also aggregated via summation into monthly values before the start of model training.

#### Google Trends

We used the Google Health Trends API to obtain monthly dengue-related search terms' frequencies at the province level for all of our locations. For a small number of locations where Google Trends data was not available at the provincial level, we used the Google Trends data of the dengue-related search terms at the country level as a proxy. Within each country, we used the same set of dengue-related search terms for each province. Country-specific lists of all the dengue-related search terms we used can be found in our Supplementary Materials.

To maintain consistency, we chose only the top 10 most useful dengue-related search terms in each country as input into the ARGO and ARGONet models that required Google Trends data. Specifically, we determined each term's "usefulness" in a particular location by computing the Pearson correlation of these term's search frequencies with the reported case counts on a time window directly preceding our model evaluation time window to avoid signal leakage. We ordered the Google Trends terms in decreasing order of Pearson correlation and used this ordered data as input into the ARGO and ARGONet models. Country-specific time windows for the Pearson correlation analyses can be found in our Supplementary Materials under the "Training Period" column of Table 2.

## 2.2 Fitting Methods

Fig. 8 illustrates our two methods for fitting our individual models at each timestep.

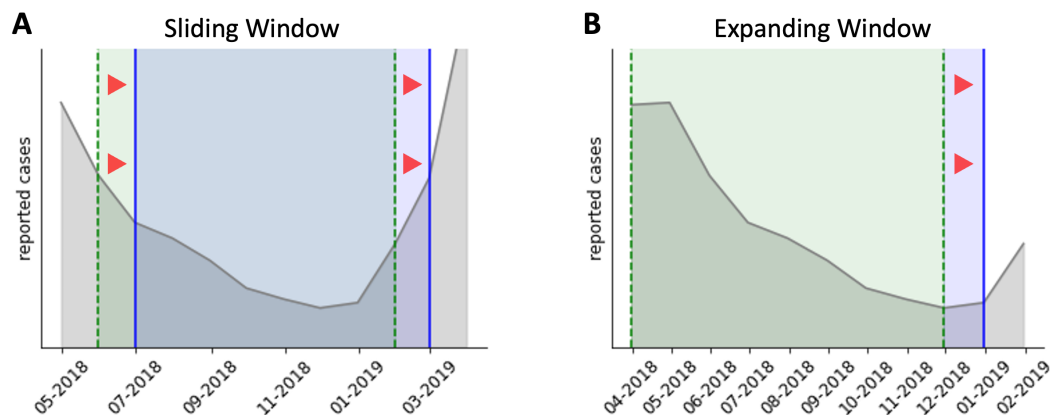


Figure 8: **Schematics of model-fitting techniques.** (A) Sliding window model-fitting. (B) Expanding window model-fitting.

Fig. 8 shows our two mechanisms for model-fitting. Panel (A) shows the sliding window mechanism for model fitting. For example, if the current time is February 2019, our prediction task is to forecast one month ahead — March 2019. And suppose, for example, that we are using a 9-month sliding window. Then, when fitting a given model to forecast for March 2019, a 9-month sliding window fitting method implies that we will only use the reported case counts data between June 2018 and February 2019 (inclusive) as target variables in our training set, as indicated by the green shaded region inside of the two dotted green lines. After March 2019, our new prediction task will be to forecast for April 2019, and we will *slide* our fitting window to fit our model using only the reported case counts data from July 2018 to March 2019 (now observed) as the target variables in our training set, as indicated by the blue shaded region inside of the two solid blue lines. To emphasize, because of the “sliding” operation, June 2018 is no longer contributing to our model fit. The assumption behind the sliding window mechanism is that infectious disease dynamics change across time, and thus, relationships between reported case counts in the distant past are likely not very informative of the current dynamics of the disease.

In contrast, panel (B) shows the expanding window mechanism for model fitting. Suppose that the earliest date in our dataset of reported case counts for which we can assemble a full

set of covariate features is April 2018. Suppose that the current time is December 2018, and our goal is to forecast one month ahead — January 2019. Then, when fitting the model using an expanding window mechanism, we will use all of the reported case counts between April 2018 and December 2018 as target variables in our training set, as indicated by the region shaded in green inside of the two green dotted lines. After January 2019, our new prediction task will be to forecast for February 2019, and we will “expand” our fitting window to use all reported case counts from April 2018 to January 2019 as target variables in the training set, with the expansion region shaded in blue and bound by the solid blue line. In contrast to the sliding window, April 2018 is still in our training set. The underlying assumption behind the expanding window mechanism is that there exists some stationary distribution / ground-truth autoregressive data-generating process that holds across all time.

## 2.3 Individual Models

In this section, we describe the individual, fine-tuned component models that we will later ensemble together for more robust forecasts.

### 2.3.1 Autoregression (AR)

As explained by [55], a  $k$ -month-ahead autoregressive model reported case counts in a specific location at month  $t + k$  as a linear combination of reported case counts at months  $t$  through  $t - L + 1$  in said location, with a bias term. The hyperparameter  $L$  is the number of lags that we are using when forecasting. Initial experiments suggested that autoregressive models experienced significant performance boosts when working with log-transformed case counts, so we define  $y_t$  as the log-transformed reported case counts of dengue in a given location at month  $t$ . An  $AR(L)$  model for  $k$ -month-ahead forecasting can thus be expressed as the following, where  $\epsilon$  is an irreducible error term:

$$y_{t+k} = \mu + \sum_{l=1}^L \beta_l y_{t-l+1} + \epsilon.$$

### *Standard Variant*

For the standard variant, at all forecast horizons and locations, we used a generic  $AR(4)$  model fitted using Ordinary Least Squares, with no log-transformation of the reported case counts. We use an expanding window for model-fitting.

### *Optimized Variant*

For the optimized variant, at all forecast horizons, we found that setting  $L = 24$  yielded the best performance. We also trained all AR models in all locations and horizons using an expanding window approach. Computationally, we used the `glmnet` package [14] to minimize the L2 error subject to LASSO regularization (with regularization strength determined using cross-validation) to fit our model at each simulated month. From initial testing, we did not regularize the first two lags. For 2- and 3-months ahead forecasting, in addition to our choice of  $L = 24$ , we manually chose the specific lags of 1, 2, 3, 12, 13, 14, 15, and 24.

## **2.3.2 AutoRegression with Google Search Data (ARGO)**

As introduced in [63], ARGO builds on the classical AR model and incorporates the most-recently-available Google Trends search frequencies of dengue-related keywords as covariates into the linear model architecture. While ARGO was originally designed for flu incidence forecasting, it has also been adopted by [27] for dengue forecasting in 20 Brazilian cities. Let  $x_{m,t}$  be the log-transformed Google Trends search frequency of term  $m$  (for  $m = 1$  to  $m = 10$ ) at month  $t$ . Then, the ARGO model with  $L$  epidemiological lags can be given by

$$y_{t+k} = \mu + \sum_{l=1}^L \beta_l y_{t-l+1} + \sum_{m=1}^{10} \gamma_m x_{m,t} + \epsilon.$$

### *Standard Variant*

For all forecast horizons, we used  $AR(4)$  coupled with the most recently observed Google Trends data as our features. We did use LASSO regularization via `glmnet` [14], but we did not protect any features from regularization. We also did not log-transform either the autore-

gressive features or the Google Trends features. We used an expanding window approach for model fitting.

### *Optimized Variant*

Just as in AR, for all forecast horizons, we set  $L = 24$  for maximum performance and use the same expanding window approach. We also use `glmnet` [14] with the same settings for model-fitting at each simulated month, with the first two epidemiological lags not subject to regularization. Unlike AR, we did not perform any manual selection of autoregressive lags and simply used all  $L = 24$  lags as covariates.

### 2.3.3 NetModel

To model the network effects of dengue spreading between nearby provinces, we extend the original AR linear model by modeling log-transformed reported case counts for location  $j$  during month  $t + k$  as a linear combination of only recent reported case counts in location  $j$ , but also recently reported case counts for all provinces  $j' \in J$ , where  $J$  is the set of all provinces in a given country. A similar approach was implemented for flu forecasting in [31].

Let  $L_a$  be the number of lags from location  $j$  itself (local lags) and  $L_b$  be the number of lags from each of the other locations  $j' \in J$  (neighbor lags) that we will be adding into our linear model. Let  $y_{j,t}$  be the log-transformed reported case counts in location  $j$  at month  $t$ . Then, our NetModel is given by

$$y_{j,t} = \mu + \sum_{l_a=1}^{L_a} \beta_{l_a} y_{j,t-l_a+1} + \sum_{j'=1, j' \neq j}^J \sum_{l_b=1}^{L_b} \gamma_{j', l_b} y_{j', t-l_b+1} + \epsilon.$$

### *Standard Variant*

For all forecast horizons, we used  $L_a = 4$  and  $L_b = 1$ . We used LASSO via `glmnet` for model-fitting, but did not protect any lags from regularization. We used the expanding window fitting scheme for all locations and horizons. We did not log-transform the local lags nor the neighbor



lags.

#### *Optimized Variant*

For 1-month ahead forecasting, we chose  $L_a = 24$ , with manual feature-selection of the lags 1, 2, 3, 12, 13, 14, 15, and 24, and chose  $L_b = 1$ , log-transforming both the local and neighbor lag features. We used `glmnet` with LASSO to fit our model, using an expanding window scheme, and refrained from regularizing the first two local lags.

For 2-months ahead forecasting, we chose  $L_a = 12$  and  $L_b = 1$ , log-transforming both the local and neighbor lag features. We also used `glmnet` with LASSO to fit our model, using an expanding window scheme, and refrained from regularizing the first two local lags.

For 3-months ahead forecasting, we chose  $L_a = 12$ , with manual feature-selection of the lags 1, 2, 3, and 12, and chose  $L_b = 2$ , log-transforming both the local and neighbor lag features. We used `glmnet` with LASSO to fit our model, using an expanding window scheme, and refrained from regularizing only the first local lags.

#### **2.3.4 ARGONet**

As introduced in [31], we also include ARGONet with two-component models — ARGO and NetModel — into our list of component models. Specifically, across all forecast horizons and locations, ARGONet returns the mean of the individual ARGO and NetModel predictions as its ensemble prediction. While ARGONet was also implemented in [31] with a winner-takes-all approach, we found that for the prediction task of forecasting monthly dengue-reported case counts, such a scheme was not as effective as simply returning the mean.

We implemented the standard / optimized variants of ARGONet by taking the mean of the corresponding standard / optimized ARGO and NetModel predictions, respectively.

### 2.3.5 Exponential Smoothing

To implement exponential smoothing (ETS), we used the `sktime` [30] toolbox in Python. We used the pipeline functionality available within `sktime` with three different input-transforming preprocessors. The preprocessors we used were a power transformation, a robust scaler, and a min-max scaler. We then used AutoETS with a period of 12 (the number of months in a season) as the model in the pipeline. The pipeline was grid searched for the optimal input transformation using cross-validation with an expanding window splitter on the training data. After the pipeline hyperparameters were trained, it was used to make out-of-sample predictions in the usual manner with sequential addition of data, retraining parameters (not hyperparameters), and subsequent prediction.

### 2.3.6 Vector Autoregression

We implemented multiple vector autoregression (VAR) models with varying degrees of regularization and clustering. Prior to modeling, the data were transformed with a standard log transformation. As with other components of the manuscript, we tested several transformation approaches, but none were consistently better than a log transformation. As the nature of VAR requires that data be available for all time points in every time series included in the model, we decided to individually implement a different VAR model for each country in the data. This allowed us to use nearly the entire time series available in each country. The alternative approach would be to combine all countries into a single model. Unfortunately, this would have seriously compromised the length of the time series in several countries as historical data varies considerably by country.

For modeling, we began with the most common method implemented in R through the `VARs` package [49]. Unfortunately, with the amount of data available, a standard VAR model in some countries (e.g., Thailand) would not converge even with a lag order of 1. However, much of the diminished performance could be resolved by implementing geographic clustering (discussed below), suggesting that the issue was primarily a result of some degree of underdetermination.

Nevertheless, the regularized models uniformly outperformed their unregularized counterparts, whether clustered or unclustered, so we proceeded with exclusively regularized models. In an effort to simplify the process of lag selection, we decided to standardize all regularized VAR models to use a lag order of 4. Any selection greater than 4 seemed to make no difference to the out-of-sample accuracy of the model.

For regularized VAR, we used primarily the `BigVAR` package made available in R [42]. We trialed several regularization frameworks, including (in the terminology of the package) Basic Lasso, Basic Elastic Net, Lag, Own/Other, Sparse Lag, Sparse Own/Other, Hierarchical Componentwise, Hierarchical Elementwise, and Hierarchical Own/Other. We used the standard rolling cross-validation method, expanding window, and adjusted the train/test window. However, there was no benefit to altering these from the default selections. We tested several lambda grid depth values and selected 100 as a good tradeoff between sufficient depth and reasonable compute time. We refer to this model in our figures and tables as “VAR (Reg.)”

### 2.3.7 Vector Autoregression with Geographic Clustering

Next, we investigated to what extent geographic clustering could improve predictions. To that end, we obtained the latitude and longitude of every city in the data. We used the `sp` [7, 47] and `geosphere` packages available in R to compute the within-country distance matrix between all cities using the Haversine distance. The cities were then grouped with hierarchical clustering. The tree was produced using `hclust` and the clusters were produced using `cutree` as the highest number of clusters that allowed two or more cities in every cluster (which is a requirement for the application of VAR).

After within-country geographic clustering, VAR and regularized VAR were applied in the same manner as above. In all figures and tables, we refer to this model using the abbreviation “VAR (Clust., Reg.)”

### 2.3.8 Stacked Machine Learning

We produced a stacked regression (stackedML) model using `sktime` [30] and `scikit-learn` [48]. We constructed it as an ensemble of several available machine-learning models in the toolboxes.

Given the challenges posed by underdetermination for these data when using higher lag orders on univariate time series, before implementing the model, we utilized a simple pipeline with a preprocessor and an elastic network (EN) base model that we optimized for the best L1 ratio. We then used this model to trim higher lag orders that seemed to improve this simple model.

After trimming the higher lag orders, we implemented the stackedML model again as a pipeline to allow comprehensive hyperparameter selection via grid-searched cross-validation. For pre-processing, we included the standard scaler, the min-max scaler, and a log transformation. For base models, we included an EN model, a k-nearest neighbors model (KNN), a support vector machine model (SVM), and a gradient-boosted machine (GBM) model. The pipeline was ensemble with an independently cross-validated elastic network model allowing only positive covariates. Hyperparameters in the base models were optimized via a grid search of the entire pipeline at once; the hyperparameters that we tuned included the number of neighbors in the KNN base model, the C-parameter in the SVM base model, and the number of leaves in the base GBM model.

After extensive testing, there were a few obvious limitations. First, optimizing the pipeline was extremely computationally intensive and became exponentially complex as more hyperparameters were searched. Second, the first issue was particularly challenging when combined with rolling optimization and leave-one-out (out-of-sample) cross-validation. Third, the data of a single-city univariate time series was clearly insufficient to tune an extremely large hyperparameter space. As a result, we pared the base models to remove the GBM. The GBM alone requires tuning of so many hyperparameters for optimal predictions that it was not improving the model with its inclusion. Then, we observed that the KNN was essentially never used by the ensembling model, so it was removed as well. As a result, we were left with an EN and an

SVM model stacked together.

### 2.3.9 Dynamically-Trained SIR

We introduce a novel, dynamically-trained SIR (DT-SIR) interpolator model for forecasting reported dengue cases. This model borrows the mathematical behaviors and properties of the traditional SIR dynamical system as introduced by Kermack and McKendrick [25] but re-purposes it for forecasting tasks.

As presented in [39], the traditional SIR model is governed by the following system of differential equations, parameterized by time  $t$ , where  $S$  is the number of susceptible individuals,  $I$  is the number of currently-infected individuals,  $R$  is the number of recovered (including deceased) individuals in a given population:

$$\frac{dS}{dt} = -\frac{\beta SI}{N}, \quad \frac{dI}{dt} = \frac{\beta SI}{N} - \gamma I, \quad \frac{dR}{dt} = \gamma I.$$

Here,  $N$  is the total number of people in the population, which we assume to be fixed. The parameter  $\beta$  governs the rate at which susceptible individuals (in  $S$ ) become infected, and the parameter  $\gamma$  governs the rate at which infected individuals (in  $I$ ) become recovered (or deceased). Mathematically, we can define any set of solution trajectory curves for  $S(t)$ ,  $I(t)$ ,  $R(t)$  for any interval of time starting with  $t = 0$  by specifying  $\beta$  and  $\gamma$ , as well as specifying our initial conditions  $S_0$  and  $I_0$  for the numbers of susceptible and infected individuals at our initial point of reference  $t = 0$ . Since the SIR model assumes for all timesteps  $t$  that  $S + I + R = N$ ,  $R_0$  is always uniquely determined by  $S_0$  and  $I_0$ .

We acknowledge that the SIR model, originally designed for modeling direct transmission-type diseases, is an oversimplified model for dengue, given the complex combination of mosquito vector-borne transmission dynamics and intricate systems of partial immunity acquisition to different serotypes. However, for the sole purpose of forecasting case counts, our empirical results suggest that the basic SIR model is still sufficient. In fact, the mechanisms of the mosquito

intermediary between infected humans for dengue transmission can be absorbed into / suitably approximated by the basic SIR model. It is also worth noting that using more complex models with more compartments and parameters risks over parameterization and overfitting, which could be undesirable regarding bias-variance tradeoff considerations.

It is important to note that our public health data provides *new* infected cases per month and not the total infected number of infected people within a population at a given time. However, because the recovery period of dengue is almost always less than a month [1], we can assume that all individuals who become newly infected in month  $m$  will also become recovered in the same month  $m$ . With this train of thought, it follows that we can treat *new* infected cases at month  $m$  as interchangeable with total infected people within the population at month  $m$ . However, from previous works in the literature, we know that dengue case reporting rates are very low. This is due in part to the reality that dengue fever oftentimes manifests no symptoms and that even when symptoms are present, they are oftentimes similar to that of the common flu. As such, reporting rates tend to be low. To accommodate this underreporting, we introduce a learnable report rate parameter  $r \in (0, 1)$  that captures the proportion of infected individuals who are recorded by public health authorities. Given  $S(t)$ ,  $I(t)$ ,  $R(t)$ , let us define  $C(t) = r \times I(t)$  to represent the number of *reported* infectious people within the population at month  $t$ , which we clarified above is interchangeable with the reported number of new infections at month  $t$ .

For each month  $m$ , DT-SIR outputs *reported* case count predictions for the month  $m + h$  at a single location through the following algorithm. For simplicity, suppose we are forecasting 1-month ahead, with  $h = 1$ . But, we can output forecasts for the 2- and 3-month-ahead horizons analogously.

1. We query the historical dengue reported case counts for the past  $T$  months:  $m - T + 1$ ,  $m - T + 2$ ,  $\dots$ ,  $m - 1$ , and  $m$ . In practice, we found through extensive testing that  $T = 5$  performed the best across all locations and horizons, and thus we set  $T = 5$  for both our standard and optimized DT-SIR variants. Let us denote these historical case counts as  $y_{m-T+1}$ ,  $y_{m-T+2}$ ,  $\dots$ ,  $y_{m-1}$ , and  $y_m$ .

- Using the `scipy.integrate.odeint` numerical integration package from SciPy [60] and the non-linear least-squares curve-fitting package `lmfit` [40], we find the best set of parameters  $\beta, \gamma, S_0, I_0, r$  such that the resultant integrated  $C(t)$  curve (always calibrated to start mathematically from  $t = 0$ , corresponding to month  $m - T + 1$ ) best fits the historical dengue reported case counts in the past  $T$  months. To emphasize, the solution curves to our SIR differential equations systems will always be plotted mathematically starting with  $t = 0$ , regardless of what month  $m$  we are in. We can do this because our initial conditions of  $S_0$  and  $I_0$  render our resultant trajectory curves agnostic to the real-time month/phase of an outbreak that we are in. We define “best fit” as minimizing the RMSE of the resultant  $C(t)$  curve (evaluated at  $t = 0, 1, 2, \dots, T - 1$ ) with respect to the historical dengue case counts observed at months  $m - T + 1, m - T + 2, \dots, m - 1$ , and  $m$ . Because this objective function is almost certainly non-convex, we cannot guarantee that our curve-fitting algorithm will find the global minima. The best we can do is find a very good local optimum.

Given that we are only using the most recent  $T$  months’ observations as input data for fitting our SIR system parameters, in other words, we are using a sliding window approach and shifting our sliding window after each prediction timestep. The reason for using a sliding window as opposed to an expanding window that we use for the other component models is because the SIR model, by nature, can only model one outbreak peak at a time. If we used an expanding window approach, we may have multiple peaks in our fitting data, and our resultant SIR parameter fit would be very poor. The sliding window approach is especially attractive if we accept the assumption that disease outbreak dynamics vary significantly across time and various historical outbreak cycles. As such, we must re-estimate our model parameters at each timestep to remain up-to-date with current transmission dynamics.

When fitting our  $C(t)$  curve to the observed monthly data, it should be noted that we limit the plausible range for  $\beta \in [0, 500]$  and  $\gamma \in [0, 8.5]$ . We limited  $\beta$  to a still sizeable range mainly for practicality and reproducibility. From existing literature [1], we know that the average human infectious period for dengue fever is 4-5 days. Canonically, we know that

$\gamma$  represents  $\frac{1}{\text{average infectious period}}$ . As such, converting to months, we find corresponding  $\gamma$  values of 6 and 7.5. We expand the upper bound of our parameter interval by 1 to account for some possible anomalies. Of course, we also restrict  $S_0$  and  $I_0$  to never exceed  $N$ , the total population. We restrict  $r \in [0, 1]$ .

To avoid being confined to one local optima, we perform 500 independent fits for  $\beta, \gamma, S_0, I_0, r$ , selecting the estimated parameters corresponding to our "best" fit (in terms of RMSE) for our forecasting purposes. For 250 of these fits, we randomly initialize our parameter guesses across their entire permitted intervals. For the other 250 fits, we initialize the starting parameter guesses to be distributed uniformly on an interval that is within 20% of the previous timestep's fitted optimal parameter values, to enforce some "continuity" of our disease dynamic parameters over time. For  $S_0$  and  $I_0$ , we initialize  $S_0$  during each fit to a starting guess of  $N$ , the total population, because intuitively, the proportion of people with dengue in a population is relatively low.

- Using our best-estimated parameters of  $\beta, \gamma, S_0$ , and  $I_0$ , and  $r$ , we evaluate  $C(t)$  at  $t = T - 1 + h$  to produce our provisional prediction for the number of reported dengue case counts at month  $m + h$ . Let us call our provisional prediction  $\hat{y}_{m+h}$ .

However, as observed in [58], SIR-type models are prone to "overshooting," or significantly overestimating the number of reported dengue cases at outbreak peaks. Our DT-SIR, without modification, also experiences such limitations. To mitigate this potential inaccuracy, we implement an anti-overshooting mechanism at each prediction timestep  $m$ , comprising of a "threshold" and a "compensator". We will explain this anti-overshooting mechanism for the 1-month-ahead forecasting task (i.e.,  $h = 1$ ), but the 2-month and 3-month-ahead setups are analogous.

- Threshold:** We calculate  $y_t - y_{t-h}$ , the observed  $h$ -month-apart differences between reported dengue case counts, for the past  $n$  months. Next, we calculate the mean observed historical differences in these past  $n$  months and add  $s$  standard deviations



to this value. This computed value is our threshold  $k$ . Formally, we have

$$k = \left( \frac{1}{n} \sum_{t=m}^{m-n+1} (y_t - y_{t-h}) \right) + s \cdot \sqrt{\frac{1}{n} \sum_{t=m}^{m-n+1} ((y_t - y_{t-h}) - \bar{y})^2}$$

where  $\bar{y}$  is the sample mean of the  $y_t - y_{t-h}$ , for  $t = m$  to  $t = m - n + 1$ . From extensive testing, we found that  $n = 24$  and  $s = 4$  were the most suitable and generalizable hyperparameter settings across all of our locations and forecast horizons.

- (b) Compensator: If the difference between our provisional prediction for month  $m + h$ ,  $\hat{y}_{m+h}$ , and the true reported case count for our most recently observed month,  $y_m$ , is greater than our threshold  $k$ , then our threshold is triggered and we adjust our prediction. Define  $\bar{y}^+$  to be the mean *positive*  $h$ -month-apart differences between reported dengue case counts for the past  $n$  months:

$$\bar{y}^+ = \frac{1}{\sum_{t=m}^{m-n+1} \mathbf{1}(y_t - y_{t-h} > 0)} \sum_{t=m}^{m-n+1} (y_t - y_{t-h}) \mathbf{1}(y_t - y_{t-h} > 0),$$

where  $\mathbf{1}$  is an indicator function. Our compensator value is formulated as the sum of  $\bar{y}^+$  and  $s$  times the standard deviation of the *positive*  $h$ -month-apart differences between reported dengue case counts for the past  $n$  months. Let  $\delta$  be our compensator value, which is formally defined as

$$\delta = \bar{y}^+ + s \cdot \sqrt{\frac{1}{\sum_{t=m}^{m-n+1} \mathbf{1}(y_t - y_{t-h} > 0)} \sum_{t=m}^{m-n+1} (y_t - y_{t-h} - \bar{y}^+)^2 \mathbf{1}(y_t - y_{t-h} > 0)}.$$

With our compensator value computed, we output the following adjusted prediction for month  $m + h$ ,  $\hat{y}'_{m+h}$ :

$$\hat{y}'_{m+h} = y_m + \delta.$$

Intuitively, it would make sense to set  $\delta = k$ . However, this alternative adjustment is suboptimal because setting it renders it very difficult for our model to predict an outbreak that is truly significantly more intense (in terms of peak reported case counts)

than it has historically seen in its training data. In contrast, using our compensator formulation with the historical *positive* differences allows us to better capture the intuition that cases will indeed increase rapidly during outbreak peaks.

4. Finally, to predict reported case counts for the next month, month  $m + h + 1$ , we slide our fitting window forward by one month and repeat the steps enumerated above.

We use similar DT-SIR model settings in both our standard and optimized ensembling tests, for all locations and all forecast horizons — specifically, we use the most recent  $T = 5$  months of observations as our sliding training window. However, for the standard model setting, we disable the anti-overshooting mechanism.

### 2.3.10 Basic Models

In addition to the more complex individual models described above, we also include two relatively-simple baselines as potential component models in our ensemble.

#### Naive Persistence

If we are simulating being in month  $t$  and forecasting  $k$  months ahead, the naive persistence model will return the number of reported cases currently observed in month  $t$  as its forecast for month  $t + k$ . We use the same naive persistence model in both our standard and optimized ensembling tests.

#### Seasonal

Suppose we are simulating being in month  $t$  and forecasting  $k$  months ahead. Without loss of generality, suppose that month  $t + k$  is January. Then, the seasonal model will query our historical reported case counts for all observed January reported case counts, and return the mean of all the historical January dengue case counts as its forecast for month  $t + k$ . The idea behind the seasonal model is that dengue has been found to be seasonal in many locations around the world (see [19], [38], [61]). We use the same seasonal model in both our standard and optimized ensembling tests.

## 2.4 Ensemble Systems

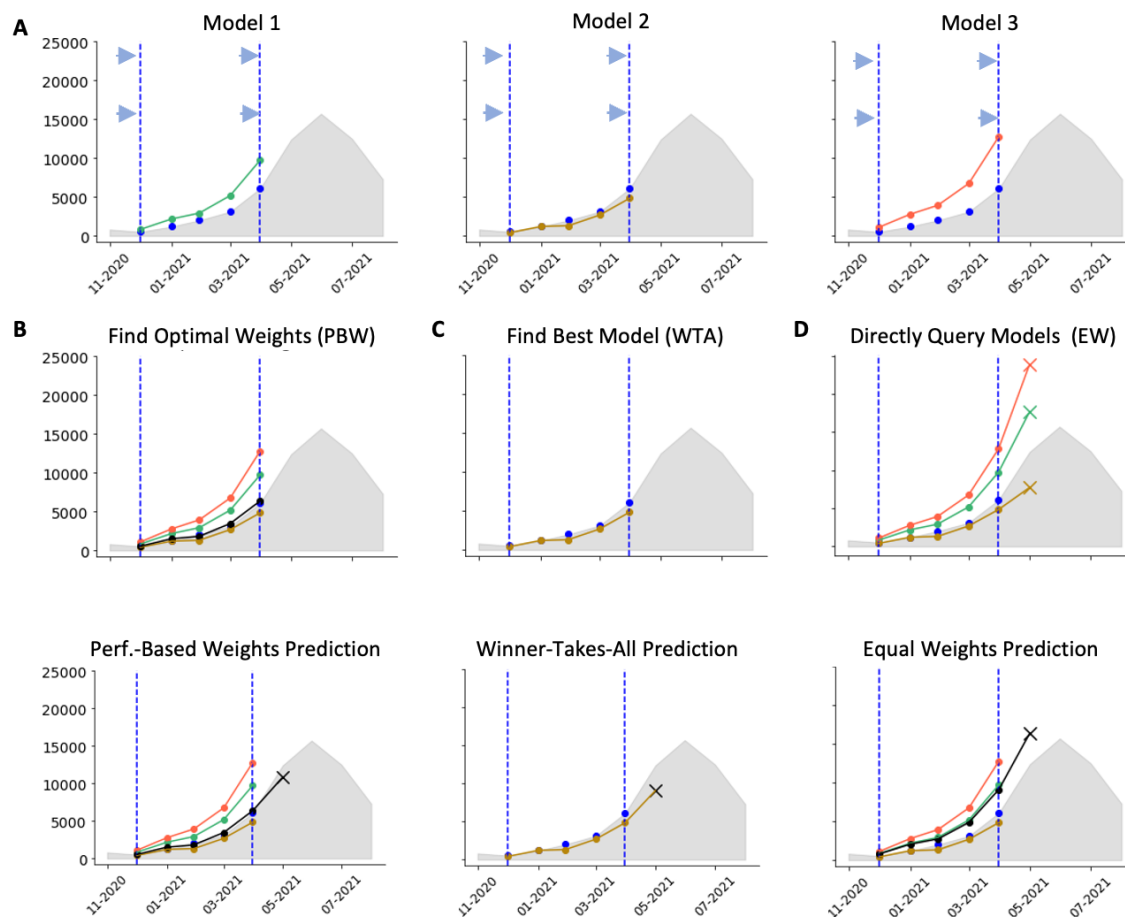


Figure 9: **Schematics of the three ensemble methods.** (A) Graphical representations of three individual models' predictions during the ensemble fitting window. The ground truth reported case counts during the ensemble fitting window are depicted using the blue points. Each individual model's predictions during the ensemble fitting window are shown with the connected lines. (B) Performance-Based Weights (PBW) ensemble fitting and prediction output. (C) Winner-Takes-All (WTA) ensemble fitting and prediction output. (D) Equal Weights (EW) ensemble prediction output.

Fig. 9 illustrates the three ensemble methods that we tested. Let  $\hat{y}_{i,t}$  refer to the prediction generated by model  $i$  for time  $t$ ,  $\hat{y}_t$  represent our component models' predictions for time  $t$  stored as a vector, and  $y_t$  be the ground-truth reported case counts at time  $t$ . Panel (B) illus-

trates the Performance-Based Weights (PBW) ensemble. In our toy example shown in Fig. 9, for this prediction timestep and our choice of a 5-month ensemble fitting window, the PBW ensemble finds the optimal set of non-negative weights  $\mathbf{w}$  that minimizes the following objective function, if we calibrate  $t = 5$  to correspond to the last observed timestep of April 2021:  $L(\mathbf{w}) = \sum_{t=1}^5 (y_t - \mathbf{w}^T \hat{\mathbf{y}}_t)^2$ , subject to the constraint that  $\mathbf{1}^T \mathbf{w} = 1$ . Such optimization was performed using the `scikit-learn` [48] package. To make our ensemble prediction for time  $t+1$ , we output said prediction as  $\mathbf{w}^T \hat{\mathbf{y}}_{t+1}$ , where  $\hat{\mathbf{y}}_{t+1}$  is the vector of our individual models' predictions for time  $t+1$ . Panel (C) illustrates the Winner-Takes-All (WTA) ensemble. Extending the notation from our discussion of the PBW ensemble, the WTA ensemble outputs  $\hat{y}_{i^*, t+1}$  as our ensemble prediction, where  $i^* = \arg \min_i \sum_{t=1}^5 (y_t - \hat{y}_{i,t})^2$  encodes the index corresponding to the component model that outputted the most accurate predictions during the ensemble fitting window. Panel (D) represents the Equal Weights (EW) ensemble, which simply outputs the unweighted mean of the components' predictions at time  $t+1$  as the ensemble prediction. Please see Tables 3-5 and 6-8 in the Supplementary Materials for the best ensemble variants using the standard and optimized individual models, respectively, at each forecast horizon and within each country.

## 2.5 Model Evaluation

All individual and ensemble models were evaluated on the time periods under "Test Period" in Table 2 in the Supplementary Materials. While available data timeframes differed significantly across countries, we aimed to secure at least 3 years (the most recent years) of evaluation data points for each country. The remainder of the data were binned as training data, whether that be used directly for model-fitting, and/or for feature engineering.

To compare model performances, we used percent absolute error (PAE) on the predicted versus ground-truth reported case counts as our evaluation metrics. The "percent" implies that we divided the raw mean absolute errors for each model in a given location by the mean number of cases present in said location during the evaluation period.

### 3 Supplementary Materials

#### 3.1 Extension of methodology for uncertainty quantification

Though not the focus of our main manuscript, our methodology can be easily extended to incorporate uncertainty quantification via approximate 95% predictive intervals for our forecasts. Our predictive interval generation algorithm is as follows:

1. Suppose today is month  $m$  and we would like to provide uncertainty quantification intervals for our  $h$ -month-ahead ensemble forecast. In practice, the ensemble can be replaced with any individual component model, too.
2. We can compute the predictive residuals  $\epsilon_t = \hat{y}_t - y_t$  for previously-observed months  $t = 1$  through  $t = m$ , where  $y_t$  was the true reported dengue case count at month  $t$  and  $\hat{y}_t$  was our  $h$ -month-ahead dengue forecast for that month (i.e., generated in month  $t - h$ ). Let us name our expanding-each-month vector of residuals at month  $m$  as  $\epsilon_m$ .
3. Using our ensemble, we can generate our point-forecast for month  $m + h$ , and denote it as  $\hat{y}_{m+h}$ . To provide uncertainty quantification, we can compute the standard deviation of this model's historical residuals stored in  $\epsilon_m$  and, assuming approximate Normality, multiply by 1.96 to obtain the width of an approximate 95% predictive interval.
4. Then, our uncertainty-quantified ensemble forecast for month  $m + h$  would be

$$\hat{y}_{m+h} \pm 1.96 \times \text{SD}(\epsilon_m).$$

5. Because case counts cannot be negative, we may also clip our forecast intervals to be strictly non-negative.

Below, we demonstrate this uncertainty quantification algorithm on 1-, 2-, and 3-month country-specific ensemble forecasts in Ceara, Brazil, with approximate 95% predictive intervals generated for January, May, and September of 2020 and 2021.

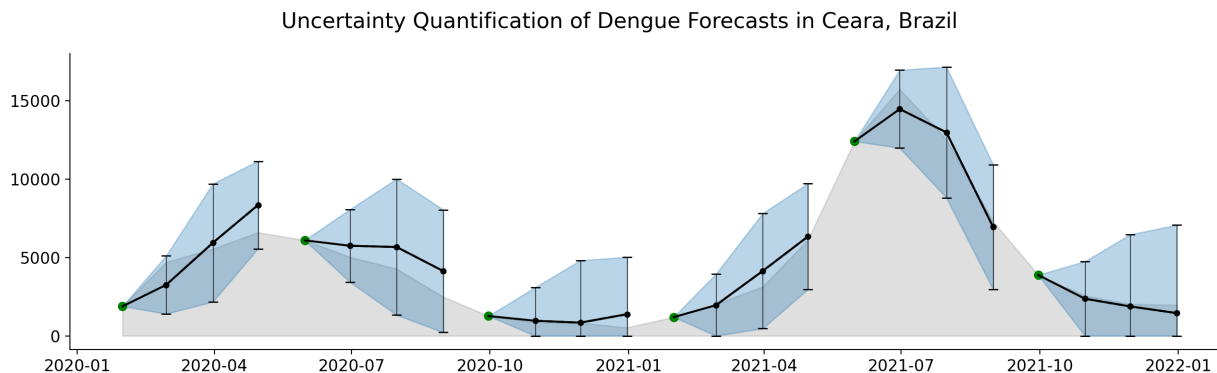


Figure 10: **Demonstration of uncertainty quantification interval algorithm in Ceara, Brazil.** The green points indicate the reference months  $m$ , and each set of subsequent three black points marks the 1-, 2-, and 3-month ahead point forecasts. The error bars corresponding to each point forecast quantify our 95% approximate predictive intervals. The blue cones emphasize how the uncertainty in our forecasts evolves over forecast horizon. The grey silhouette shows the ground truth reported dengue case counts.

**No one individual model is best across all locations: model performance is significantly dependent on location.**

Fig. 1 summarizes the comparative performances of our optimized individual and ensemble models' within each of the five countries, tested across the three prediction tasks of forecasting 1-, 2-, and 3-months ahead. The reader can find additional details on our fine-tuning and optimization processes in the Supplementary Information.

Panel (A) illustrates our three forecasting tasks of forecasting 1-, 2-, and 3-months ahead. Panels (B) to (F) show the models' performances within each country in two ways. On the left of each panel, we present a heatmap where each row represents a model, and each column encodes the number of locations within the country of interest where a model achieved a certain rank in terms of percent absolute error (PAE) compared to the other individual component and ensemble models (1st through 13th rankings). The models in each heatmap are listed in decreasing order by the sum of the number of locations where each model performed in the first, second, or third ranks. As an example, "Ensemble (Country, EW)" having a value of 7 corre-

sponding to Ranking 1 in Brazil (1-Month Ahead) means that the country-specific ensemble incurred the lowest (best) PAE compared to all other individual and ensemble models in 7 out of the 27 provinces of Brazil. On the right of each panel, we have a geographical map where each province is colored according to the model that incurred the lowest PAE in that province, with the legend displayed at the bottom of the overall figure. Overall, ensemble models were robust within any of our tested countries. They demonstrated the most or nearly the most top-3 rankings compared to other models.

Formally, we define percent absolute error (PAE) on the predicted versus ground-truth reported case counts as the raw mean absolute error divided by the mean number of monthly reported cases observed in a given location during the evaluation period. Mathematically, let  $y_1 \dots y_T$  be the ground-truth reported case counts, and  $\hat{y}_1 \dots \hat{y}_T$  be our predicted case counts. Then,

$$\text{PAE} = \frac{\sum_{t=1}^T |\hat{y}_t - y_t|}{\sum_{t=1}^T y_t}.$$

On the right of panels (B) - (F), we plot a map of each country along with the best-performing model for each province. We observed that no particular model consistently performs the best across all locations and prediction tasks within a country. Our findings thus suggest that, in practice, it is not feasible to train, evaluate, and find the best-performing models for every single province in every single country. Instead, using an out-of-the-box ensemble setup would require significantly less computation and optimization while still effectively guaranteeing strong performance. In what follows, we present the results for each country.

## Brazil

Fig. 1 (B) shows that, within the 27 provinces of Brazil, the country-specific ensemble achieved the most top 3 rankings compared to any other model, with the overall ensemble having reached the second most top 3 rankings at the 1-month and 2-month horizons. However, at the 3-month horizon, ARGONet and AR outperformed the overall ensemble in the number of

top 3 rankings. From the accompanying color-coded geographical maps, we observed that at any forecast horizon for Brazil, the ensemble did not rank first in many locations - the winning model varied widely across sites.

## **Colombia**

Fig. 1 (C) shows our 13 models' ranking in the 33 provinces of Colombia. While the country-specific and overall ensembles achieved the most top 3 rankings at the 1-month ahead forecast horizon, clustered + regularized VAR achieved the most top 3 rankings, superseding the two ensemble variants, at 2-month ahead. At 3-months ahead, the country-specific ensemble achieved the top 3 rankings, but the overall ensemble was still outperformed by clustered + regularized VAR.

## **Malaysia**

Fig. 1 (D) shows our results for the 15 provinces in Malaysia. While the country-specific ensemble achieved the most top 3 rankings at the 1-month and 3-month ahead horizons, clustered + regularized VAR achieved the most top 3 rankings at the 2-month horizon. Notably, the overall ensemble did not generalize very well in Malaysia, being ranked even below the naive persistence baseline at the 1-month ahead horizon. We note, however, that the two easternmost (and largest) Malaysian provinces both saw the country-specific ensemble performing the best out of all 13 models at the 1-month and 3-month horizons.

## **Mexico**

Fig. 1(E) shows our 13 models' rankings in the 32 provinces of Mexico. Regularized VAR achieved the top 3 rankings at the 1-month ahead forecast horizon, followed by the country-specific ensemble. At the 2-month ahead horizon, the two ensembles achieved the top 3 rankings, though at 3-months ahead. In contrast, the overall ensemble maintained the top 3 rank-



ings, regularized VAR overtook the country-specific ensemble for the second most top 3 rankings. From the geographical maps, we see that no individual model achieved the top rank across most of locations.

## Thailand

In Fig. 1(F), we show the results in the 77 provinces of Thailand. From the heatmaps, we observed that the country-specific ensemble achieved the most top 3 rankings at the 1-month and 2-month horizons. By comparison, regularized VAR superseded both ensembles for the most top 3 rankings at the 3-month horizon. Notably, at the 2-month horizon, regularized VAR achieved more first-place rankings than both ensembles. At the 1-month horizon, regularized VAR achieved the same number of first-place rankings as the overall ensemble and significantly more first-place rankings than the country-specific ensemble. The geographical maps show that no particular model performed the best across most Thailand provinces.

]

## **No one individual model is best across all locations: model performance is significantly dependent on location.**

Fig. 1 summarizes the comparative performances of our optimized individual and ensemble models' within each of the five countries, tested across the three prediction tasks of forecasting 1-, 2-, and 3-months ahead. The reader can find additional details on our fine-tuning and optimization processes in the Supplementary Information.

Panel (A) illustrates our three forecasting tasks of forecasting 1-, 2-, and 3-months ahead. Panels (B) to (F) show the models' performances within each country in two ways. On the left of each panel, we present a heatmap where each row represents a model, and each column encodes the number of locations within the country of interest where a model achieved a certain rank in terms of percent absolute error (PAE) compared to the other individual component and

ensemble models (1st through 13th rankings). The models in each heatmap are listed in decreasing order by the sum of the number of locations where each model performed in the first, second, or third ranks. As an example, “Ensemble (Country, EW)” having a value of 7 corresponding to Ranking 1 in Brazil (1-Month Ahead) means that the country-specific ensemble incurred the lowest (best) PAE compared to all other individual and ensemble models in 7 out of the 27 provinces of Brazil. On the right of each panel, we have a geographical map where each province is colored according to the model that incurred the lowest PAE in that province, with the legend displayed at the bottom of the overall figure. Overall, ensemble models were robust within any of our tested countries. They demonstrated the most or nearly the most top-3 rankings compared to other models.

Formally, we define percent absolute error (PAE) on the predicted versus ground-truth reported case counts as the raw mean absolute error divided by the mean number of monthly reported cases observed in a given location during the evaluation period. Mathematically, let  $y_1 \dots y_T$  be the ground-truth reported case counts, and  $\hat{y}_1 \dots \hat{y}_T$  be our predicted case counts. Then,

$$\text{PAE} = \frac{\sum_{t=1}^T |\hat{y}_t - y_t|}{\sum_{t=1}^T y_t}.$$

On the right of panels (B) - (F), we plot a map of each country along with the best-performing model for each province. We observed that no particular model consistently performs the best across all locations and prediction tasks within a country. Our findings thus suggest that, in practice, it is not feasible to train, evaluate, and find the best-performing models for every single province in every single country. Instead, using an out-of-the-box ensemble setup would require significantly less computation and optimization while still effectively guaranteeing strong performance. In what follows, we present the results for each country.

## Brazil

Fig. 1 (B) shows that, within the 27 provinces of Brazil, the country-specific ensemble achieved the most top 3 rankings compared to any other model, with the overall ensemble having reached the second most top 3 rankings at the 1-month and 2-month horizons. However, at the 3-month horizon, ARGONet and AR outperformed the overall ensemble in the number of top 3 rankings. From the accompanying color-coded geographical maps, we observed that at any forecast horizon for Brazil, the ensemble did not rank first in many locations - the winning model varied widely across sites.

## Colombia

Fig. 1 (C) shows our 13 models' ranking in the 33 provinces of Colombia. While the country-specific and overall ensembles achieved the most top 3 rankings at the 1-month ahead forecast horizon, clustered + regularized VAR achieved the most top 3 rankings, superseding the two ensemble variants, at 2-month ahead. At 3-months ahead, the country-specific ensemble achieved the top 3 rankings, but the overall ensemble was still outperformed by clustered + regularized VAR.

## Malaysia

Fig. 1 (D) shows our results for the 15 provinces in Malaysia. While the country-specific ensemble achieved the most top 3 rankings at the 1-month and 3-month ahead horizons, clustered + regularized VAR achieved the most top 3 rankings at the 2-month horizon. Notably, the overall ensemble did not generalize very well in Malaysia, being ranked even below the naive persistence baseline at the 1-month ahead horizon. We note, however, that the two easternmost (and largest) Malaysian provinces both saw the country-specific ensemble performing the best out of all 13 models at the 1-month and 3-month horizons.

## Mexico

Fig. 1(E) shows our 13 models' rankings in the 32 provinces of Mexico. Regularized VAR achieved the top 3 rankings at the 1-month ahead forecast horizon, followed by the country-specific ensemble. At the 2-month ahead horizon, the two ensembles achieved the top 3 rankings, though at 3-months ahead. In contrast, the overall ensemble maintained the top 3 rankings, regularized VAR overtook the country-specific ensemble for the second most top 3 rankings. From the geographical maps, we see that no individual model achieved the top rank across most of locations.

## Thailand

In Fig. 1(F), we show the results in the 77 provinces of Thailand. From the heatmaps, we observed that the country-specific ensemble achieved the most top 3 rankings at the 1-month and 2-month horizons. By comparison, regularized VAR superseded both ensembles for the most top 3 rankings at the 3-month horizon. Notably, at the 2-month horizon, regularized VAR achieved more first-place rankings than both ensembles. At the 1-month horizon, regularized VAR achieved the same number of first-place rankings as the overall ensemble and significantly more first-place rankings than the country-specific ensemble. The geographical maps show that no particular model performed the best across most Thailand provinces.


### 3.2 Forecasting performance of ensemble models built from standard non-optimized individual components

It is not always feasible to fine-tune the hyperparameters of each individual component model into their most optimized, highest-performing variants, as we did in this study. In many situations, the lack of high-quality epidemiological data and/or computational resources may impose significant challenges, likely forcing users to apply standard, off-the-shelf models and systems without significant fine-tuning. In this section, we demonstrate that even in such a

situation, ensembling is a very effective and robust solution for short-term forecasting.

We present the performances of 11 standard component models and two ensemble variants on forecasting dengue in our tested province-level locations. The forecasting tasks, evaluation ranges and metrics, data sources, and training processes are identical to those of the results that we present in the main manuscript for the optimized models. We also refer the reader to our Methods section and the Additional Methods Details in our Supplementary Information for specific details on our standard individual component models, intended to replicate off-the-shelf deployment.

Our key findings from this section not only corroborate but also, in fact, enhance our reported findings in the main manuscript. First, we find that there does not exist one standard model that consistently outperforms all others in all locations, reinforcing our corresponding finding in the main manuscript with optimized models. Second, and most importantly, even though our standard individual component models are overall markedly inferior to the naive persistence baseline model, combining such weak individual component models together produces ensemble models that consistently and significantly outperform the naive persistence baseline. Indeed, even when given weak individual learners, our ensemble methods are robust and generalizable forecasting tools. Fig. 11 summarizes our standard individual and ensemble models' comparative performances within each of the five tested countries, across our three prediction tasks of forecasting 1-, 2-, and 3-months ahead. The individual models presented here are deployed with standard off-the-shelf settings and are not fully-optimized.

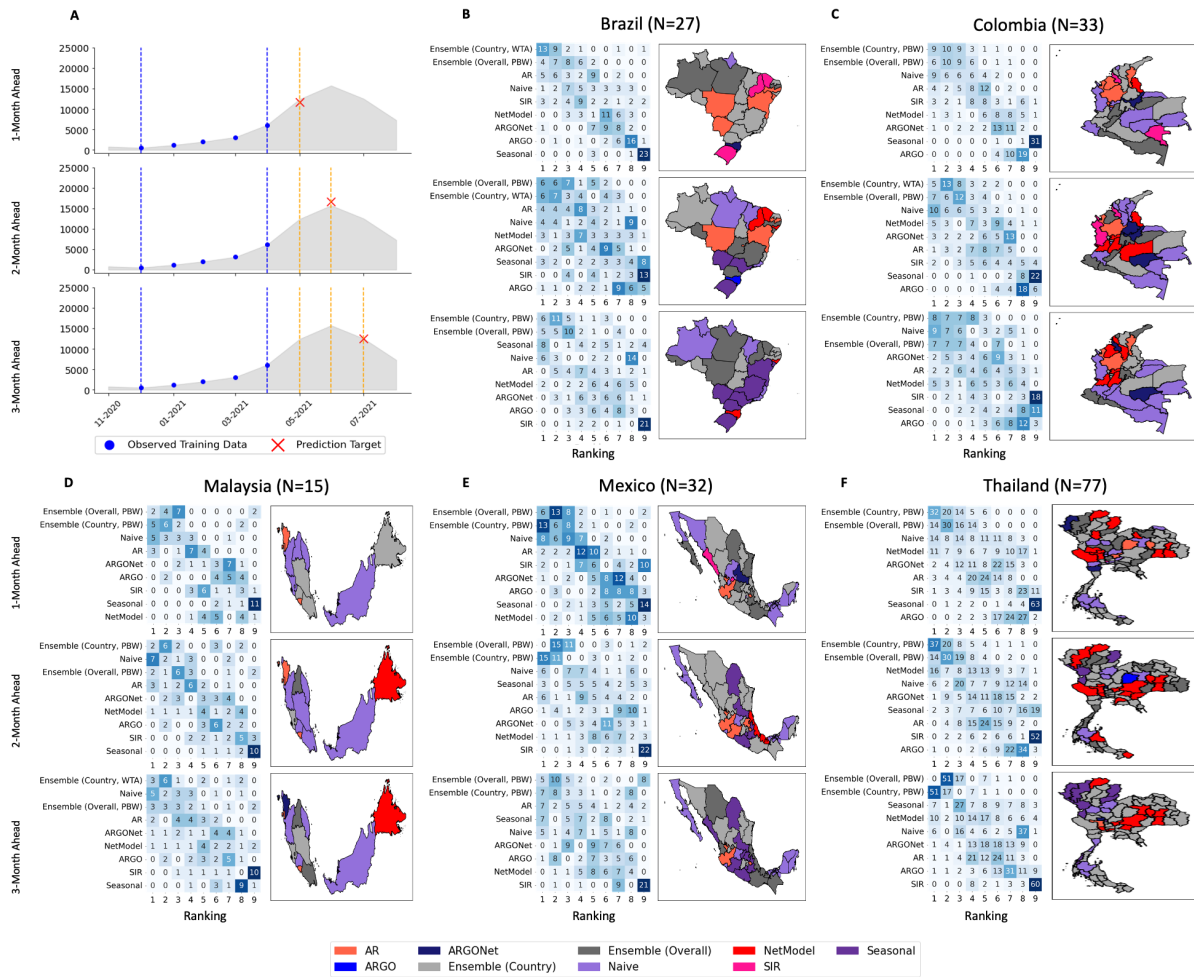

**Figure 11: Country-specific standard individual and ensemble model performance rankings.** (A) Graphical representations of the 1-, 2-, and 3-month forecast horizons. The red X marks our forecasting target  $n$ -months ahead, the blue dots represent the historical cases that we are using as our observed training data (in this case, a 5-month window), the vertical blue dotted lines represent the limits of our training data range. The grey silhouette represents the ground truth reported case counts. (B) - (F) Within each country and forecast horizon, the heatmaps show the rankings distribution for each individual and ensemble model's forecasts in terms of percent absolute error. The geographic maps next to each heatmap indicate the best-performing model in each province, color-coded by the legend at the bottom of the figure.

The heatmaps on Fig. 11 represent the distribution of rankings for each model in each country, with models listed in decreasing order by the number of top 3 rankings accrued. We observe that in all combinations of country and forecast horizon presented, an ensemble model

achieved the most top 3 rankings. This corroborates our finding in the main manuscript that the ensembles, while not always the top 1 ranked model, are generally very high-performing and robust.

From the geographical color-coded maps encoding the top 1 model in each province, we observe that no one model — standard individual nor ensemble — consistently outperformed the rest of the models. This result mirrors our finding in the main manuscript that no individual model performs the best across all locations consistently. Finally, the heatmaps and geographical maps emphasize that our standard individual component models are indeed very weak learners, being mostly outperformed by the naive persistence model.

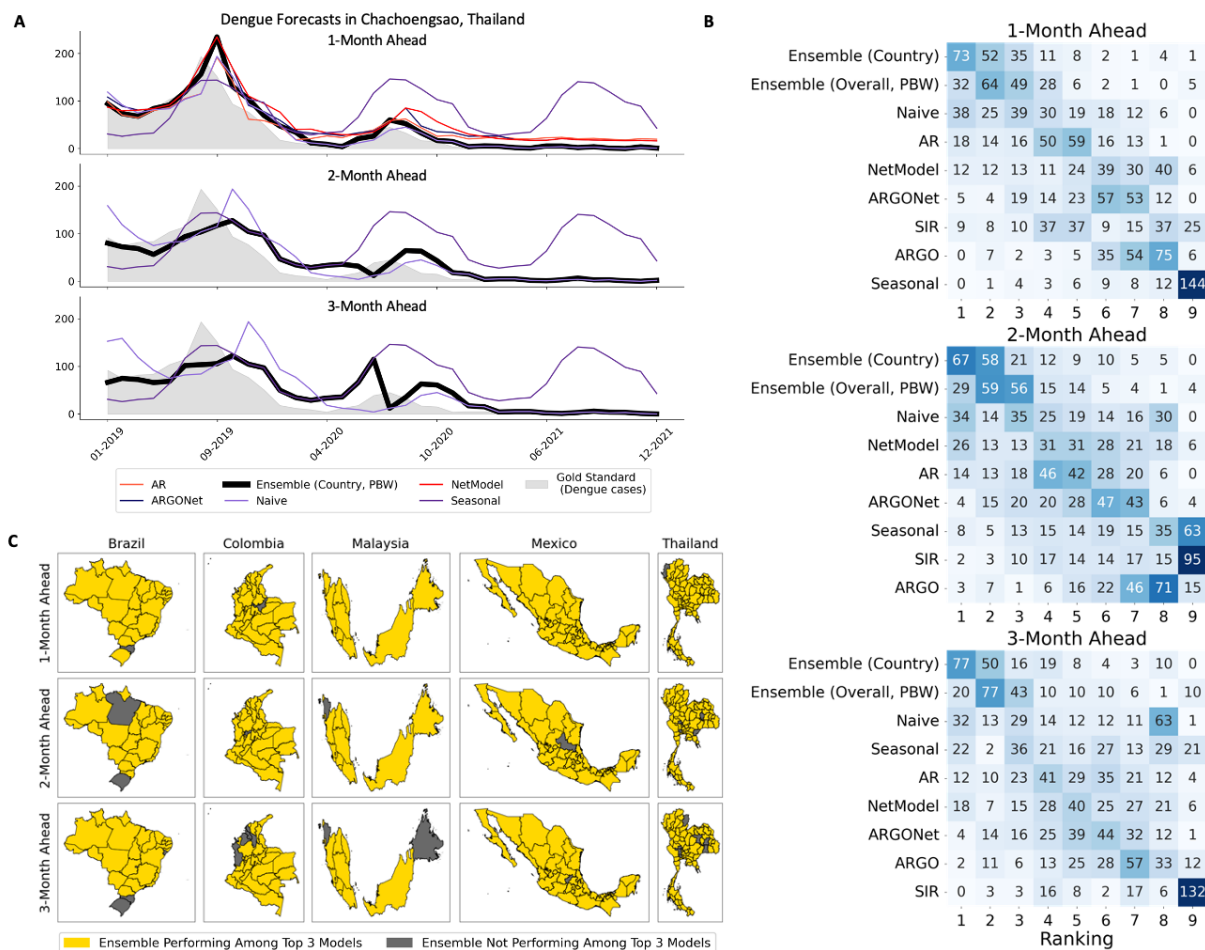


Figure 12: **A summary of our prediction tasks and standard models' overall performances across 187 locations.** (A) An example of our standard country-specific ensemble variants' forecasts compared to their standard, non-optimized component models in one selected location — Chachoengsao, Thailand. The gold standard ground truth of reported dengue cases is shown as the grey silhouette. Ensemble predictions are shown in thick, bolded lines, while standard component models are shown in thinner, colored lines. (B) Heatmaps of the number of locations where each model attained a specific ranking in terms of mean absolute error with respect to the ground truth reported dengue case counts across all 187 locations. (C) Geographical maps of Brazil, Colombia, Malaysia, Mexico, and Thailand showing provinces where either the country-specific or overall ensemble performed in the top 3 rankings for each location (in yellow) and where they did not (in grey).

Fig. 12 shows the forecasting performances of our standard individual and ensemble models across all 187 tested locations. Panel (A) emphasizes the primary advantage of ensemble mod-



els over their individual component models: while the individual component models fluctuate wildly in underpredicting and overpredicting, the ensemble model is much more invariant to such fluctuations and much more closely matches the ground truth.

From panel (B), we observe that for all three forecast horizons, both ensemble models achieved the most top 3 rankings compared to any other model, including the naive persistence baseline, which is ranked higher than all other standard individual component models. Indeed, one main advantage of the ensemble models is that they can take in the naive persistence models' inputs as a component model, absorbing the robustness of the naive persistence model in times when the more complex data-driven models fail to perform well.

Panel (C) corroborates the main message in panel (B): the presence of only a few sparse patches of grey indicates that the ensemble models performed in the top 3 rankings for almost all tested locations. It should be mentioned that there are more yellow patches on this grid of maps than the corresponding grid presented in the main manuscript (see Fig. 2) — which is to be expected, as the standard individual models are consistently weaker than their optimized counterparts.

Fig. 13 displays the percent absolute error distributions for all of our standard individual component and ensemble models across all 187 tested locations. The ensemble models incurred the best mean percent absolute error across all locations compared to all other models. If compared to the optimized model results in the main manuscript, the improvements from individual component models to ensemble models were much larger when working with standard models. Finally, while all of the individual component models, at any forecast horizon, incurred significantly worse errors than the naive persistence model, the resultant ensemble models — taking as input these very same weak learners — were generally able to outperform the naive persistence baseline.

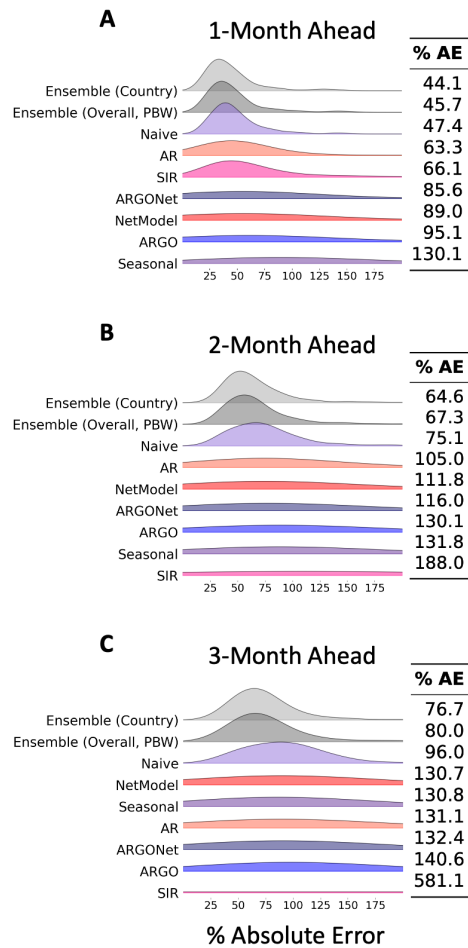


Figure 13: **Overall error distributions for standard individual and ensemble models across all 187 tested locations.** (A) - (C) Ridgeline plots show percent absolute error distributions at the 1-month, 2-month, and 3-month horizons, respectively. Side tables record the mean percent absolute error incurred.

Fig. 14 provides more granular, country-specific summaries of the standard individual and component models' percent absolute error distributions within each country and forecast horizon. Corroborating our findings in the main manuscript, an ensemble model achieved the lowest mean percent absolute error in 12 out of 15 tested combinations of forecast horizon and country. The only exceptions were Malaysia at 1- and 2-months ahead, and Mexico at 1-month ahead, where the ensembles were still unable to outperform the naive persistence model in terms of mean percent absolute error. Nonetheless, even when the naive persistence model

ranks higher, the error distributions of the two ensembles are visually very similar to that of the naive persistence.

Compared to Fig. 4, we observe that the differences in variance between the two ensembles and the standard individual component models, as measured through the spread of their ridgeline distributions, were much more pronounced. This corroborates our continual finding that ensembles yield relatively larger performance improvements when provided with weaker learners as input.



### 3.3 Additional Methods Details

Country	Terms Queried
Brazil	dengue, sintomas dengue, sintomas da dengue, a dengue, sintomas de dengue, mosquito da dengue, mosquito Dengue, sobre a dengue, mosquito, dengue hemorrágica
Colombia	dengue, dengue sintomas, el dengue, sintomas del dengue, dolor de cabeza, dolor cabeza, fiebre, hemorragia, dolor abdominal, me duele la cabeza
Malaysia	demam, denggi, demam denggi, sakit kepala, demam panas, sakit tulang, tanda denggi, simptom denggi, ruam merah, gejala denggi
Mexico	dengue dengue dengue, dengue, dengue sintomas, el dengue, sintomas del dengue, dengue hemorragico, sintomas de dengue, dengue clasico, que es dengue, dengue mosquito
Peru	sintomas de dengue, que es dengue, dengue mosquito, dengue hemorragico, dengue sintomas, el dengue, dengue clasico, sintomas del dengue, dengue dengue dengue, dengue
Puerto Rico	dengue dengue dengue, dengue, sintomas del dengue, el dengue, dengue sintomas, sintomas de dengue, dengue mosquito, dengue hemorragico, que es dengue, dengue clasico
Thailand	ไข้เลือดออก, อาการ ของ ไข้เลือดออก, โรค ไข้เลือดออก, โรคไข้เลือดออก, อาการ โรค ไข้เลือดออก, เกณฑ์เลือดต่ำ, สาเหตุ ไข้เลือดออก, การ ป้องกัน ไข้เลือดออก, ไข้เลือดออก ระบาด, ไข้ตั้งก็

Figure 15: Country-specific Google Trends search terms.

Country	Training Period	Test Period
Brazil	January 2010 - December 2017	January 2018 - December 2021
Colombia	January 2007 - December 2013	January 2014 - December 2017
Malaysia	January 2010 - December 2017	January 2018 - December 2021
Mexico	January 2013 - December 2017	January 2018 - December 2021
Peru	January 2001 - December 2008	January 2009 - December 2012
Puerto Rico	January 1991 - December 2008	January 2009 - December 2012
Thailand	January 2003 - December 2017	January 2018 - December 2021

Table 2: Country-specific train and test periods. Specifically, the “Test Period” column denotes the range of dates for which predictions were generated by individual component models. Because ensemble models require an extra ensemble training window range, we generated ensemble model predictions starting one year after the individual component model start date. All metrics for both individual component and ensemble models presented in this paper are computed across the ensembles models’ test prediction ranges.

Country	Ensembling Method	ETW	Component Models
Brazil	Winner-Takes-All	2	AR, Naive, NetModel
Colombia	Performance-Based Weights	3	AR, Naive
Malaysia	Performance-Based Weights	1	ARGO, Naive, NetModel
Mexico	Performance-Based Weights	2	AR, Naive, Seasonal
Peru	Performance-Based Weights	3	Naive, Seasonal
Puerto Rico	Equal Weights	0	AR, SIR
Thailand	Performance-Based Weights	1	AR, ARGONet, Naive, NetModel, Seasonal
Overall	Performance-Based Weights	2	AR, Naive, NetModel

Table 3: Best ensemble variants in each country for forecasting 1-month ahead using standard component models. “ETW” refers to ensemble training window.

Country	Ensembling Method	ETW	Component Models
Brazil	Winner-Takes-All	1	AR, Naive
Colombia	Winner-Takes-All	4	AR, Naive
Malaysia	Performance-Based Weights	4	AR, Naive
Mexico	Performance-Based Weights	1	AR, Naive, Seasonal
Peru	Performance-Based Weights	1	SIR, Seasonal
Puerto Rico	Equal Weights	0	SIR, Seasonal
Thailand	Performance-Based Weights	3	Naive, Seasonal
Overall	Performance-Based Weights	1	AR, Naive, Seasonal

Table 4: Best ensemble variants in each country for forecasting 2-months ahead using standard component models. “ETW” refers to ensemble training window.

Country	Ensembling Method	ETW	Component Models
Brazil	Performance-Based Weights	6	Naive, Seasonal
Colombia	Performance-Based Weights	3	Naive, NetModel
Malaysia	Winner-Takes-All	2	AR, Naive
Mexico	Performance-Based Weights	1	ARGONet, Naive, Seasonal
Peru	Performance-Based Weights	1	Naive, SIR, Seasonal
Puerto Rico	Performance-Based Weights	1	SIR, Seasonal
Thailand	Performance-Based Weights	2	Naive, Seasonal
Overall	Performance-Based Weights	2	Naive, Seasonal

Table 5: Best ensemble variants in each country for forecasting 3-months ahead using standard component models. “ETW” refers to ensemble training window.

Country	Ensembling Method	ETW	Component Models
Brazil	Equal Weights	0	AR, NetModel, SIR, VAR (Clust., Reg.), VAR (Reg.)
Colombia	Equal Weights	0	ARGONet, SIR, VAR (Clust., Reg.), VAR (Reg.)
Malaysia	Performance-Based Weights	1	ARGO, ARGONet, Naïve, Seasonal, VAR (Clust., Reg.), VAR (Reg.)
Mexico	Performance-Based Weights	1	ARGO, VAR (Clust., Reg.), VAR (Reg.)
Peru	Performance-Based Weights	5	ARGO, NetModel, Seasonal
Puerto Rico	Equal Weights	0	SIR, StackedML
Thailand	Performance-Based Weights	12	NetModel, VAR (Clust., Reg.), VAR (Reg.)
Overall	Equal Weights	0	ARGO, NetModel, SIR, VAR (Clust., Reg.), VAR (Reg.)

Table 6: Best ensemble variants in each country for forecasting 1-month ahead using optimized component models. “ETW” refers to ensemble training window.

Country	Ensembling Method	ETW	Component Models
Brazil	Equal Weights	0	AR, ARGONet, SIR, StackedML, VAR (Clust., Reg.), VAR (Reg.)
Colombia	Equal Weights	0	ARGONet, SIR, VAR (Clust., Reg.), VAR (Reg.)
Malaysia	Equal Weights	0	AR, ARGO, ARGONet, ETS, Naïve, NetModel, SIR, VAR (Clust., Reg.)
Mexico	Winner-Takes-All	4	ARGONet, VAR (Clust., Reg.), VAR (Reg.)
Peru	Performance-Based Weights	1	SIR, Seasonal
Puerto Rico	Equal Weights	0	SIR, StackedML
Thailand	Equal Weights	0	NetModel, VAR (Reg.)
Overall	Equal Weights	0	ARGONet, VAR (Clust., Reg.), VAR (Reg.)

Table 7: Best ensemble variants in each country for forecasting 2-months ahead using optimized component models. “ETW” refers to ensemble training window.

Country	Ensembling Method	ETW	Component Models
Brazil	Performance-Based Weights	12	ARGO, ARGONet, VAR (Clust., Reg.)
Colombia	Performance-Based Weights	12	SIR, VAR (Clust., Reg.), VAR (Reg.)
Malaysia	Performance-Based Weights	4	NetModel, StackedML, VAR (Clust., Reg.)
Mexico	Winner-Takes-All	1	VAR (Clust., Reg.), VAR (Reg.)
Peru	Performance-Based Weights	1	Naïve, SIR, Seasonal
Puerto Rico	Winner-Takes-All	12	SIR, StackedML
Thailand	Performance-Based Weights	6	NetModel, StackedML, VAR (Reg.)
Overall	Performance-Based Weights	1	ARGONet, VAR (Reg.)

Table 8: Best ensemble variants in each country for forecasting 3-months ahead using optimized component models. “ETW” refers to ensemble training window.

### 3.4 Optimized Models' PAE by Country

#### 3.4.1 1-Month Ahead

location	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
Acre	40.0	40.0	40.2	42.9	<b>38.2</b>	38.2	42.9	40.5	57.2	98.9	45.9	<b>30.3</b>	32.8
Alagoas	26.7	26.7	25.6	38.4	<b>24.3</b>	24.3	38.4	24.8	31.3	121.0	28.2	26.0	28.1
Amapa	41.1	42.0	42.0	39.9	42.0	42.4	<b>39.9</b>	42.1	59.1	539.3	128.8	46.2	53.7
Amazonas	23.1	22.6	23.0	27.1	23.5	23.4	27.1	23.6	30.1	119.0	45.2	<b>21.2</b>	27.2
Bahia	22.4	23.0	20.6	42.1	24.9	24.7	42.1	<b>20.6</b>	33.2	51.4	33.0	33.7	31.7
Ceara	<b>17.4</b>	17.8	18.0	35.6	17.7	17.8	35.6	18.3	28.8	90.5	58.3	23.9	25.7
Distrito Federal	32.7	32.0	25.2	45.8	26.5	26.4	45.8	<b>22.3</b>	40.3	66.3	42.4	38.5	27.7
Espirito Santo	24.9	<b>24.0</b>	25.7	35.4	25.7	25.6	35.4	27.8	40.5	125.7	37.8	26.2	29.2
Goias	20.5	21.2	20.2	35.8	18.1	<b>18.0</b>	35.8	20.7	26.8	60.0	22.7	22.7	19.6
Maranhao	41.5	42.9	42.0	41.8	36.7	37.0	41.8	41.2	50.2	183.5	126.0	<b>35.4</b>	35.5
Mato Grosso	25.9	26.5	27.8	34.1	25.8	25.8	34.1	31.0	42.6	52.5	<b>22.0</b>	24.3	25.0
Mato Grosso do Sul	28.4	28.4	28.4	49.9	<b>26.3</b>	<b>26.3</b>	49.9	28.4	44.4	57.0	28.6	29.1	33.2
Minas Gerais	<b>32.7</b>	<b>32.7</b>	35.1	50.8	34.1	34.1	50.8	39.0	33.4	87.5	45.3	40.2	49.7
Para	<b>24.7</b>	25.7	26.1	35.5	28.1	28.2	35.5	27.2	40.4	132.7	43.3	36.7	26.4
Paraiba	25.4	25.3	24.8	37.9	22.7	<b>22.7</b>	37.9	24.7	29.0	75.6	37.4	23.4	32.4
Parana	29.0	29.0	29.0	50.7	<b>25.0</b>	<b>25.0</b>	50.7	29.0	34.1	67.2	40.1	32.7	35.1
Pernambuco	26.4	26.4	26.8	36.5	26.2	26.2	36.5	27.1	35.8	64.2	26.8	28.9	<b>22.2</b>
Piaui	27.8	27.8	26.9	44.6	<b>23.7</b>	23.7	44.6	26.2	34.0	109.2	53.2	29.3	32.9
Rio Grande do Norte	29.1	28.0	32.3	35.0	25.6	<b>25.4</b>	35.0	36.8	31.9	103.5	46.0	26.6	28.6
Rio Grande do Sul	53.0	53.0	49.1	77.1	48.6	48.6	77.1	<b>48.1</b>	55.9	71.1	53.2	52.8	55.2
Rio de Janeiro	33.0	30.1	33.3	45.5	<b>30.1</b>	30.3	45.5	38.0	40.0	420.0	120.8	34.1	39.1
Rondonia	30.2	30.1	30.1	31.2	26.2	26.2	31.2	30.1	35.6	144.8	39.5	26.6	<b>24.6</b>
Roraima	29.6	29.7	30.2	<b>28.9</b>	30.0	30.0	29.0	30.7	36.7	241.7	52.4	32.5	34.6
Santa Catarina	38.1	38.1	36.4	53.5	<b>30.1</b>	<b>30.1</b>	53.5	44.0	40.7	77.3	38.9	44.2	41.2
Sao Paulo	26.3	26.1	26.5	45.6	26.1	26.1	45.6	27.1	32.6	44.4	<b>25.6</b>	29.3	32.5
Sergipe	29.9	29.9	29.9	42.9	<b>29.3</b>	<b>29.3</b>	42.9	29.9	35.6	69.6	41.1	31.0	35.6
Tocantins	24.9	25.0	24.0	38.1	23.2	23.2	38.1	<b>23.0</b>	33.9	89.7	31.9	26.5	30.1

Table 9: 1-month ahead percent absolute errors in Brazil for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
Amazonas	<b>39.8</b>	<b>39.8</b>	40.1	-	42.6	41.9	42.8	40.4	60.4	148.3	99.8	45.2	43.8
Antioquia	17.3	17.3	17.6	-	16.7	<b>16.6</b>	20.5	18.0	20.0	80.8	25.7	18.8	20.6
Arauca	<b>32.8</b>	32.8	33.2	-	34.1	33.8	33.7	33.7	44.5	126.0	52.9	35.4	38.8
Atlantico	<b>31.1</b>	<b>31.1</b>	<b>31.1</b>	-	32.0	31.6	44.1	<b>31.1</b>	32.8	103.0	43.4	37.5	37.1
Bogota	100.3	100.3	100.3	-	111.6	109.4	103.9	100.3	158.3	612.7	528.8	<b>89.0</b>	98.9
Bolivar	25.8	25.8	25.8	-	25.4	<b>25.4</b>	30.9	25.8	30.1	83.2	31.1	32.0	34.1
Boyaca	35.5	35.5	34.9	-	<b>32.9</b>	33.2	34.4	35.3	33.7	80.9	36.6	37.2	38.4
Caldas	29.3	29.3	29.7	-	27.2	27.6	31.2	30.8	35.2	64.0	33.1	<b>25.4</b>	26.6
Caqueta	34.6	34.6	34.4	-	35.8	35.3	36.5	34.3	46.9	78.6	43.5	38.0	<b>32.9</b>
Casanare	30.2	30.2	29.7	-	25.3	25.6	29.3	29.7	36.7	116.7	47.9	<b>21.4</b>	25.6
Cauca	25.3	25.3	25.3	-	25.4	<b>25.1</b>	25.6	25.3	29.0	67.5	32.1	27.8	30.4
Cesar	<b>23.8</b>	23.9	24.9	-	24.7	24.4	27.4	27.4	29.6	86.4	27.5	25.1	30.1
Choco	27.9	27.9	27.9	-	<b>25.8</b>	26.0	30.0	27.9	34.3	63.7	37.5	26.9	29.5
Cordoba	31.2	32.0	31.7	-	<b>29.7</b>	30.0	31.0	31.4	34.8	81.1	49.2	30.4	36.6
Cundinamarca	19.2	19.2	18.9	-	18.7	18.6	21.1	19.1	26.1	56.5	<b>17.8</b>	22.0	20.0
Guainia	50.7	50.7	50.2	-	<b>47.0</b>	47.3	54.5	49.8	57.7	97.4	62.4	50.5	47.7
Guajira	38.6	38.5	38.5	-	<b>36.4</b>	36.5	38.4	38.7	41.0	145.2	46.4	37.7	38.9
Guaviare	38.0	38.0	38.0	-	34.3	34.4	41.0	38.0	52.4	76.2	42.8	36.2	<b>34.2</b>
Huila	24.7	24.7	24.7	-	<b>22.1</b>	22.5	23.6	24.7	28.6	67.7	28.4	-	23.7
Magdalena	36.3	36.3	35.5	-	<b>33.3</b>	33.7	37.5	34.7	37.2	103.6	39.9	35.1	35.8
Meta	17.3	17.3	17.6	-	17.2	<b>17.1</b>	20.7	17.9	21.5	78.8	19.6	20.8	19.7
Naria	<b>30.1</b>	<b>30.1</b>	<b>30.1</b>	-	31.1	30.5	32.0	<b>30.1</b>	43.7	59.0	36.0	30.7	32.0
Norte Santander	<b>19.8</b>	<b>19.8</b>	<b>19.8</b>	-	19.8	19.8	20.6	<b>19.8</b>	25.8	77.3	27.8	19.9	22.2
Putumayo	21.9	21.9	21.3	-	20.7	20.5	24.8	26.5	29.9	56.6	27.7	24.6	<b>19.0</b>
Quindio	<b>16.5</b>	<b>16.5</b>	<b>16.5</b>	-	17.4	17.2	21.4	<b>16.5</b>	22.0	55.4	17.7	18.7	17.8
Risaralda	24.5	24.5	24.7	-	<b>23.3</b>	23.6	25.7	24.9	27.9	90.9	68.5	23.9	27.0
San Andres	55.7	56.9	57.9	-	60.2	<b>55.0</b>	74.1	59.0	78.2	90.8	63.0	-	-
Santander	13.3	13.3	13.3	-	12.0	<b>12.0</b>	14.2	13.3	16.4	76.6	14.4	12.9	12.5
Sucre	34.2	34.2	34.2	-	<b>30.9</b>	31.6	33.2	34.2	33.1	98.3	67.5	34.7	38.8
Tolima	<b>16.4</b>	<b>16.4</b>	16.4	-	18.9	18.3	19.4	16.5	28.3	46.4	18.0	18.8	18.5
Valle	<b>18.4</b>	<b>18.4</b>	<b>18.4</b>	-	19.8	19.5	22.5	<b>18.4</b>	28.3	61.7	19.5	18.6	18.4
Vaupes	160.9	160.9	160.9	-	132.0	137.8	150.0	160.9	133.5	364.0	316.9	<b>120.0</b>	<b>120.0</b>
Vichada	50.6	50.6	50.6	-	46.5	<b>45.8</b>	54.2	50.6	62.7	117.0	73.8	51.6	55.7

Table 10: 1-month ahead percent absolute errors in Colombia for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.



location	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
Johor	24.3	24.3	24.3	24.2	21.5	22.4	21.8	24.3	28.4	52.6	29.9	22.0	<b>21.4</b>
Kedah	26.0	26.0	26.0	29.7	25.8	24.0	28.2	26.0	36.4	49.9	36.9	<b>23.5</b>	24.4
Kelantan	36.7	36.7	36.1	41.8	<b>33.2</b>	38.1	41.8	35.6	51.1	82.8	59.8	40.4	40.1
Kuala Lumpur and Putrajaya	24.9	24.9	24.9	25.1	<b>21.8</b>	21.9	23.4	24.9	28.3	58.9	29.8	22.8	22.3
Labuan	56.8	56.8	56.8	<b>53.9</b>	58.6	61.2	65.8	56.8	71.9	109.9	103.4	60.5	66.0
Malacca	-	-	-	25.0	20.8	20.5	21.0	-	-	54.8	24.7	21.7	<b>19.4</b>
Negeri Sembilan	21.3	21.3	21.3	21.9	<b>19.9</b>	21.1	20.4	21.3	24.9	47.6	25.1	26.1	25.0
Pahang	25.1	25.0	24.8	25.9	<b>19.7</b>	21.7	20.3	24.6	30.0	64.3	29.0	23.3	23.8
Perak	22.9	22.9	22.9	20.4	19.9	21.0	<b>19.4</b>	22.9	23.2	103.3	34.1	23.8	24.1
Perlis	44.7	44.7	44.7	44.5	46.9	35.6	52.5	44.7	66.1	116.8	55.3	<b>31.6</b>	34.1
Pulau Pinang	-	-	-	28.8	<b>21.3</b>	28.7	27.4	-	-	106.3	33.4	29.1	28.2
Sabah	32.0	32.0	32.0	31.8	<b>27.5</b>	34.4	31.6	31.9	53.4	48.7	34.0	31.0	30.9
Sarawak	24.8	24.8	24.8	22.6	<b>19.5</b>	23.6	20.6	24.9	27.6	85.0	26.8	28.7	29.0
Selangor	24.4	24.4	24.4	23.2	21.7	22.7	<b>20.8</b>	24.4	32.5	57.6	31.2	22.4	21.6
Terengganu	38.5	38.5	38.5	38.8	41.4	37.7	39.0	38.5	45.2	172.5	64.1	38.3	38.0

Table 11: 1-month ahead percent absolute errors in Malaysia for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
Aguascalientes	103.2	103.2	103.2	97.6	<b>84.7</b>	95.4	100.8	103.3	88.1	153.9	129.4	94.1	88.2
Baja California	212.6	212.6	212.6	<b>111.1</b>	164.2	179.1	111.1	212.6	192.3	1911.7	1622.6	148.1	166.7
Baja California Sur	68.5	68.5	60.1	79.4	76.3	81.9	78.8	<b>54.3</b>	135.3	2126.3	1606.1	89.0	77.3
Campeche	68.3	68.3	71.0	70.8	66.7	68.5	74.2	73.8	91.8	418.7	101.5	<b>60.7</b>	61.3
Chiapas	46.8	46.8	46.9	49.6	39.2	45.3	49.7	48.5	71.7	139.8	68.3	<b>36.5</b>	44.5
Chihuahua	110.0	110.0	110.0	137.2	111.1	132.2	140.7	110.0	253.6	137.3	132.6	<b>89.6</b>	102.1
Coahuila	56.0	58.1	59.0	90.6	<b>48.0</b>	58.0	90.6	60.0	64.0	76.8	79.1	70.9	72.0
Colima	54.2	54.2	54.2	62.0	51.9	52.1	62.0	54.2	76.4	195.3	71.5	50.3	<b>48.2</b>
Durango	100.0	100.0	100.0	106.0	118.1	102.2	98.8	100.0	125.9	282.8	324.7	<b>78.6</b>	130.5
Guanajuato	71.2	71.2	71.1	93.7	<b>55.1</b>	63.1	86.4	71.1	98.0	308.3	398.6	66.8	62.2
Guerrero	51.7	51.7	51.9	56.0	53.0	<b>44.2</b>	56.0	52.1	56.0	151.6	90.2	47.6	55.9
Hidalgo	75.4	75.4	75.6	87.2	60.8	67.5	87.2	75.8	112.6	96.6	91.0	70.9	<b>59.9</b>
Jalisco	44.5	40.1	35.8	55.2	33.8	<b>32.0</b>	55.2	44.8	67.3	88.1	58.4	44.6	38.7
Mexico	117.9	118.1	118.0	118.7	119.5	115.7	136.3	117.9	185.1	145.6	173.5	<b>115.5</b>	117.3
Mexico City	-	-	-	-	-	-	-	-	-	-	-	-	-
Michoacan	42.2	31.9	36.9	39.2	<b>26.3</b>	35.9	39.2	44.0	50.3	77.9	50.8	40.7	42.2
Morelos	48.7	47.6	48.3	61.2	<b>46.9</b>	48.7	61.3	49.2	73.6	62.6	48.2	47.0	46.9
Nayarit	62.1	62.1	62.1	64.0	49.8	57.1	64.3	62.1	80.3	95.3	73.0	48.5	<b>47.7</b>
Nuevo Leon	48.5	47.8	45.0	87.8	50.9	60.8	87.4	<b>44.4</b>	110.6	122.8	93.7	51.2	67.5
Oaxaca	54.3	54.3	53.3	58.8	47.9	<b>44.9</b>	58.7	53.2	83.4	100.4	61.1	54.1	50.6
Puebla	52.9	52.7	51.1	58.0	48.7	<b>45.7</b>	58.1	50.6	57.8	78.2	94.9	53.4	45.9
Queretaro	73.6	73.6	82.9	76.5	76.7	73.6	76.0	92.3	118.0	110.4	110.7	81.9	75.9
Quintana Roo	45.5	45.5	45.5	41.6	47.0	42.7	<b>41.6</b>	45.5	46.0	142.1	67.4	52.2	42.5
San Luis Potosi	62.9	62.9	62.9	78.8	<b>54.5</b>	59.5	78.7	62.9	100.2	90.4	93.5	56.7	56.5
Sinaloa	54.2	53.6	54.0	63.7	49.7	50.0	63.7	54.6	<b>32.2</b>	89.0	57.8	67.1	70.6
Sonora	53.9	53.9	54.6	72.6	58.6	54.0	72.5	55.2	75.7	507.9	412.1	63.5	<b>52.6</b>
Tabasco	53.1	53.1	53.2	54.2	52.5	53.1	54.2	53.3	66.6	233.6	57.8	<b>50.4</b>	51.1
Tamaulipas	63.4	63.4	63.4	62.8	58.6	<b>50.8</b>	62.8	63.5	68.9	147.1	132.1	55.8	55.1
Tlaxcala	-	-	-	-	-	-	-	-	-	-	-	-	-
Veracruz	48.9	48.4	47.1	52.1	44.4	43.3	52.0	45.9	49.6	104.6	73.2	49.5	<b>36.6</b>
Yucatan	61.4	61.4	58.9	53.1	52.7	53.2	53.2	56.6	51.1	285.2	93.3	60.9	<b>42.7</b>
Zacatecas	113.5	113.5	113.7	105.9	102.3	<b>96.2</b>	107.8	113.8	214.1	192.2	206.0	103.7	109.7

Table 12: 1-month ahead percent absolute errors in Mexico for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
Iquitos	67.5	67.7	67.6	79.8	<b>53.6</b>	-	79.2	67.5	119.3	80.6	74.4	-	-

Table 13: 1-month ahead percent absolute errors in Peru for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
San Juan	27.4	28.4	27.9	30.7	<b>16.8</b>	-	30.7	27.4	22.2	60.7	22.5	-	-

Table 14: 1-month ahead percent absolute errors in Puerto Rico for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
Amnat Charoen	43.2	43.2	<b>43.1</b>	56.6	49.5	49.1	56.6	44.9	65.7	99.2	62.5	56.5	58.1
Ang Thong	51.1	51.1	50.8	53.3	47.0	46.7	53.3	50.6	52.4	80.5	53.6	47.9	<b>46.5</b>
Bangkok	29.9	30.2	28.0	35.7	25.9	28.2	35.7	<b>25.9</b>	39.5	73.4	52.2	28.2	27.4
Bungkan	<b>69.4</b>	70.8	72.2	80.5	87.0	80.2	80.4	73.6	115.6	87.0	98.1	77.9	85.8
Buri Ram	35.0	34.3	34.0	45.8	33.6	36.5	45.8	33.9	55.7	79.1	48.6	<b>31.1</b>	31.2
Chachoengsao	27.8	27.8	<b>25.9</b>	31.5	27.2	29.5	31.5	27.2	32.7	146.7	52.1	35.2	36.9
Chai Nat	48.4	48.4	48.4	49.1	47.9	<b>46.4</b>	49.0	48.3	56.7	76.7	52.6	47.1	50.1
Chaiyaphum	39.1	39.0	37.0	43.6	36.7	36.5	43.6	<b>34.9</b>	43.0	89.3	47.3	45.0	46.8
Chanthaburi	27.6	27.6	23.5	43.3	23.2	27.1	43.3	<b>22.4</b>	38.8	83.2	39.7	33.6	26.1
Chiang Mai	29.1	29.1	24.6	45.1	23.1	25.8	45.1	<b>22.8</b>	43.8	68.5	35.1	29.2	25.7
Chiang Rai	38.6	38.6	35.0	49.6	<b>32.0</b>	38.9	49.6	32.9	68.3	76.9	56.0	39.5	43.8
Chon Buri	29.4	29.4	29.4	33.5	30.1	29.4	33.5	29.4	40.2	67.9	<b>28.2</b>	29.0	37.9
Chumphon	37.2	37.6	37.5	39.3	33.7	34.5	39.3	37.5	43.6	85.9	46.7	35.7	<b>32.2</b>
Kalasin	35.7	35.8	34.1	46.8	31.1	31.0	46.8	35.6	51.7	69.9	44.6	<b>30.9</b>	32.1
Kamphaeng Phet	45.0	43.3	37.4	42.6	33.9	35.5	42.6	<b>33.3</b>	47.9	132.2	69.4	40.8	33.8
Kanchanaburi	41.1	41.1	38.7	44.8	37.3	<b>34.9</b>	44.8	37.6	48.7	91.7	40.6	37.7	35.2
Khon Kaen	41.5	41.5	41.4	<b>40.4</b>	44.5	43.5	40.4	41.3	59.7	83.8	42.3	42.0	42.3
Krabi	34.0	34.0	34.0	31.5	26.7	29.3	31.5	34.0	38.9	178.0	37.3	30.2	<b>26.1</b>
Lampang	41.8	42.0	39.0	63.2	34.2	38.9	63.2	36.3	73.1	68.3	55.9	37.5	<b>30.6</b>
Lamphun	49.5	49.5	47.0	59.1	38.4	45.4	59.1	44.7	70.8	136.3	78.2	<b>36.2</b>	39.5
Loei	41.3	41.3	38.3	52.3	36.6	<b>34.1</b>	52.3	35.4	44.4	80.0	50.1	48.2	41.8
Lop Buri	41.4	41.4	41.3	41.6	40.3	39.5	41.6	41.2	54.8	72.6	47.5	39.5	<b>39.4</b>
Mae Hong Son	40.7	40.7	41.7	62.0	41.4	42.3	62.0	43.0	73.9	63.9	50.7	<b>40.5</b>	51.7
Maha Sarakham	38.8	38.8	37.7	47.3	39.8	<b>37.0</b>	47.3	38.3	61.8	81.4	51.3	41.5	38.8
Mukdahan	40.4	40.3	37.8	57.9	36.3	39.5	57.9	<b>35.4</b>	62.3	78.1	45.8	44.2	43.6
Nakhon Nayok	54.1	54.1	54.1	55.4	<b>49.9</b>	55.8	55.4	54.1	77.4	124.5	75.6	57.7	51.1
Nakhon Pathom	18.1	18.0	16.6	28.6	16.1	<b>15.7</b>	28.6	15.9	23.1	58.3	19.3	17.5	18.0
Nakhon Phanom	48.4	48.5	48.3	65.4	54.6	<b>42.6</b>	65.4	48.1	45.0	71.1	58.7	50.8	49.1
Nakhon Ratchasima	35.4	35.4	<b>35.0</b>	45.7	36.3	36.1	45.7	35.6	48.7	82.8	45.2	36.8	37.3
Nakhon Sawan	29.6	29.6	26.7	31.2	25.3	27.9	31.2	<b>24.3</b>	42.7	74.7	31.0	29.4	27.7
Nakhon Si Thammarat	21.1	21.1	19.9	25.1	<b>18.7</b>	21.4	25.1	18.8	31.0	87.2	28.8	19.9	19.2
Nan	51.0	51.0	50.8	57.0	52.5	55.0	57.0	50.6	90.6	56.2	48.4	<b>53.7</b>	<b>46.6</b>
Narathiwat	34.8	35.1	31.8	38.6	30.8	33.7	38.6	31.5	54.3	94.5	46.6	29.7	<b>29.7</b>
Nong Bua Lam Phu	47.3	47.6	49.4	58.9	50.6	<b>46.5</b>	58.9	51.3	64.2	82.8	85.2	54.3	47.9
Nong Khai	43.0	43.0	38.1	53.1	38.7	37.5	53.1	<b>35.9</b>	56.2	79.2	47.4	42.1	38.4
Nonthaburi	25.1	25.1	25.1	35.4	23.3	<b>22.9</b>	35.4	25.1	30.1	99.5	33.7	23.0	23.6
P.Nakhon S.Ayutthaya	32.7	32.7	32.4	37.1	29.1	<b>27.2</b>	37.1	32.0	41.6	85.3	40.0	28.9	29.9
Pathum Thani	40.1	40.1	39.8	40.1	<b>34.0</b>	34.1	39.9	39.4	44.2	127.9	45.7	36.2	34.9
Pattani	30.9	30.9	30.6	34.7	29.8	30.6	34.7	32.3	40.7	84.4	38.5	29.2	<b>28.3</b>
Phangnga	31.1	31.1	31.1	39.3	30.6	31.1	39.3	31.1	48.0	62.5	38.5	31.8	<b>30.4</b>
Phatthalung	43.5	43.5	43.7	47.2	39.3	43.9	47.2	44.2	63.7	135.7	57.4	<b>38.9</b>	40.4
Phayao	56.1	56.2	54.4	69.7	39.8	45.0	69.7	52.7	66.1	82.7	73.7	51.3	<b>39.3</b>
Phetchabun	37.2	38.3	34.4	51.2	32.4	33.8	51.2	<b>30.5</b>	53.2	77.6	40.3	39.6	36.3
Phetchaburi	32.5	32.5	32.1	29.8	31.0	29.7	29.8	32.2	35.1	94.9	34.3	<b>29.4</b>	30.4
Phichit	47.4	47.4	47.3	52.7	41.7	44.0	52.7	47.4	63.2	163.0	50.5	<b>38.2</b>	43.0
Phitsanulok	37.5	37.5	37.6	40.9	<b>30.4</b>	30.9	40.9	37.8	49.7	74.8	38.6	32.3	30.9
Phrae	51.6	51.5	50.4	68.2	37.4	41.6	68.2	50.0	64.3	139.2	71.5	41.9	<b>27.3</b>
Phuket	32.5	32.5	32.4	34.9	29.0	31.3	34.9	32.2	39.0	110.5	49.7	<b>27.6</b>	30.0
Prachin Buri	30.4	30.5	29.4	41.2	31.1	<b>25.6</b>	41.2	28.9	34.9	76.3	39.7	29.1	30.5
Prachuap Khiri Khan	31.7	31.8	31.0	32.2	27.8	29.1	32.2	30.3	35.3	83.2	38.3	32.4	<b>27.0</b>
Ranong	44.3	44.3	44.5	47.0	41.7	42.1	45.3	44.8	58.5	48.3	<b>40.8</b>	46.1	42.2
Ratchaburi	27.7	27.8	27.0	27.1	23.1	25.1	27.1	26.2	29.9	68.3	26.7	<b>20.7</b>	24.9
Rayong	28.9	29.0	28.9	38.0	29.8	<b>28.7</b>	38.0	28.9	40.4	67.2	36.3	34.8	31.1
Roi Et	30.0	30.1	29.6	44.5	29.0	31.4	44.5	29.3	52.1	74.8	38.0	29.1	<b>28.9</b>
Sa Kaeo	35.3	35.2	35.5	42.4	38.3	<b>33.0</b>	42.4	35.7	38.8	83.7	36.7	36.6	39.4
Sakon Nakhon	40.8	40.8	39.6	64.1	38.8	39.1	64.1	38.3	72.0	74.7	42.9	40.2	<b>37.9</b>
Samut Prakan	28.3	28.1	27.4	30.3	<b>26.7</b>	27.1	30.3	27.2	37.1	95.3	30.6	29.2	28.7
Samut Sakhon	24.9	24.9	24.8	28.9	24.3	24.6	28.9	24.8	39.2	73.0	29.6	<b>23.4</b>	24.1
Samut Songkhram	41.0	41.0	39.7	40.9	34.1	33.4	40.5	38.4	40.1	137.8	48.7	<b>32.9</b>	39.9
Saraburi	35.0	35.0	34.7	37.5	32.2	31.7	37.5	34.4	46.2	66.0	35.2	<b>30.5</b>	31.0
Satun	70.9	70.9	70.9	73.3	62.4	68.5	73.3	70.9	99.8	226.0	125.7	<b>59.7</b>	68.4
Si Sa Ket	31.9	31.9	30.9	42.8	32.5	33.1	42.8	<b>30.3</b>	54.0	85.2	43.1	30.8	31.2
Sing Buri	76.9	76.9	76.8	83.0	77.4	<b>75.2</b>	85.0	76.7	95.4	95.3	91.0	75.3	75.5
Songkhla	29.4	29.4	29.4	31.2	28.8	29.2	31.2	29.7	38.6	95.4	34.6	<b>27.3</b>	28.9
Sukhothai	37.4	37.4	35.3	43.5	34.8	<b>31.2</b>	43.5	34.6	39.1	56.3	31.9	35.0	36.7
Suphan Buri	24.7	24.7	24.6	31.6	23.7	<b>22.7</b>	31.6	24.5	33.8	45.1	26.4	24.9	23.1
Surat Thani	37.1	36.9	34.9	37.4	33.5	32.6	37.4	33.2	39.3	184.0	42.9	37.3	<b>31.8</b>
Surin	34.3	34.3	31.6	40.4	33.0	<b>29.1</b>	40.4	32.3	57.7	65.5	29.6	31.2	32.0
Tak	34.7	34.7	32.8	51.1	28.8	33.2	51.1	31.9	58.0	41.8	36.1	38.4	<b>27.0</b>
Trang	30.9	29.1	<b>26.9</b>	41.8	28.2	29.0	41.8	27.1	46.5	68.3	43.2	29.4	30.1
Trat	42.0	42.1	41.6	43.4	41.3	<b>36.6</b>	43.4	41.2	46.5	95.3	45.0	40.6	39.4
Ubon Ratchathani	32.9	33.1	<b>32.6</b>	50.7	34.0	34.9	50.7	33.0	45.1	81.3	43.3	40.7	35.7
Udon Thani	45.9	45.5	43.7	67.3	38.6	45.8	67.3	42.0	87.4	87.2	56.4	45.5	<b>38.0</b>
Uthai Thani	42.7	42.7	41.6	48.0	37.8	46.4	48.0	41.1	74.7	81.6	51.2	45.0	<b>36.2</b>
Uttaradit	44.2	44.3	40.3	55.3	38.0	42.9	55.3	<b>37.0</b>	73.6	49.3	45.4	42.7	39.7
Yala	31.3	31.3	31.3	34.5	30.5	<b>28.8</b>	34.5	31.3	40.5	77.8	35.3	32.7	30.2
Yasothon	38.2	38.1	37.1	47.1	38.6	39.2	47.1	36.2	64.6	79.1	43.4	38.1	<b>36.2</b>

Table 15: 1-month ahead percent absolute errors in Thailand for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

### 3.4.2 2-Month Ahead

location	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
Acre	55.5	55.9	58.1	76.8	52.9	53.0	76.8	61.3	74.1	96.5	62.7	<b>49.2</b>	54.3
Alagoas	49.8	50.2	57.3	73.2	<b>47.7</b>	50.8	73.2	65.4	52.9	119.7	72.5	49.6	49.7
Amapa	68.6	70.2	73.6	58.6	69.6	74.0	<b>58.5</b>	82.4	82.7	540.8	132.4	<b>80.5</b>	78.6
Amazonas	35.4	33.6	33.9	44.4	33.6	31.7	44.4	40.1	51.9	116.4	99.7	<b>29.4</b>	35.1
Bahia	37.1	<b>36.7</b>	36.7	73.4	39.8	46.1	73.4	44.6	70.3	51.4	39.4	54.0	50.3
Ceara	31.7	31.9	<b>31.6</b>	65.6	34.2	35.3	65.6	33.1	61.9	90.7	70.4	42.8	39.6
Distrito Federal	53.8	53.7	<b>53.1</b>	79.6	47.4	44.0	79.6	44.5	68.8	66.2	55.3	60.4	44.9
Espirito Santo	45.3	<b>45.3</b>	46.3	64.8	50.4	47.4	64.8	51.5	57.8	123.6	73.0	46.2	50.7
Goias	31.1	30.5	31.9	63.6	<b>25.4</b>	26.0	63.6	39.6	53.0	57.8	37.8	35.0	29.3
Maranhao	69.5	70.5	60.7	72.6	63.7	56.0	72.6	<b>52.6</b>	97.4	180.4	138.6	58.8	57.5
Mato Grosso	48.8	49.1	61.8	62.1	47.1	47.6	62.1	80.3	80.0	52.7	<b>39.0</b>	45.0	41.8
Mato Grosso do Sul	50.9	51.2	53.4	92.1	<b>46.8</b>	47.5	92.1	57.8	81.0	56.0	59.8	52.0	53.6
Minas Gerais	<b>55.9</b>	57.3	70.8	99.1	61.7	63.4	99.1	86.6	74.4	86.9	70.9	60.5	67.5
Para	39.9	41.4	40.9	59.0	<b>43.3</b>	43.4	59.0	40.7	85.8	127.6	83.9	59.1	<b>38.7</b>
Paraiba	39.0	38.8	43.2	61.2	<b>36.9</b>	42.0	61.2	49.1	50.1	75.0	47.4	38.1	47.3
Parana	59.0	59.0	49.0	96.3	<b>48.6</b>	50.9	96.3	53.9	61.6	67.0	56.1	58.8	57.0
Pernambuco	40.2	40.0	40.3	63.3	39.4	40.0	63.2	41.7	65.4	64.5	60.2	44.5	<b>37.3</b>
Piaui	41.8	40.7	44.7	73.6	<b>37.5</b>	39.2	73.7	50.6	58.7	104.9	85.2	45.6	41.5
Rio Grande do Norte	47.8	47.9	47.5	61.5	<b>45.4</b>	44.1	61.5	47.3	62.0	103.9	93.5	<b>43.4</b>	45.6
Rio Grande do Sul	77.4	76.1	70.4	117.5	70.6	72.1	117.5	<b>68.2</b>	100.6	71.0	77.8	73.7	76.5
Rio de Janeiro	57.8	53.5	59.4	81.6	84.6	51.0	81.6	70.1	73.8	410.4	325.9	<b>44.3</b>	52.2
Rondonia	35.5	35.7	38.8	53.3	<b>34.4</b>	34.5	53.3	49.8	53.9	139.7	52.8	38.7	36.7
Roraima	42.9	42.8	50.5	<b>42.2</b>	44.5	46.1	42.2	58.5	53.9	228.3	82.3	43.6	48.0
Santa Catarina	66.4	65.9	<b>42.2</b>	100.5	57.2	55.6	100.5	46.4	86.2	77.1	66.6	66.1	64.9
Sao Paulo	54.1	56.1	58.2	85.6	50.1	53.1	85.6	64.0	76.2	<b>44.0</b>	60.2	51.0	53.5
Sergipe	52.3	52.3	51.6	70.2	51.8	52.9	70.2	<b>51.0</b>	66.7	69.2	59.0	52.2	55.5
Tocantins	46.2	45.7	46.9	68.9	<b>44.2</b>	46.6	68.9	51.3	61.1	87.1	57.1	48.5	51.4

Table 16: 2-month ahead percent absolute errors in Brazil for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
Amazonas	<b>49.4</b>	<b>49.4</b>	58.1	-	51.3	52.9	55.0	69.4	68.1	119.2	77.6	50.3	50.6
Antioquia	32.9	32.9	37.7	-	<b>28.5</b>	33.9	37.5	51.2	32.9	76.3	40.5	32.0	35.7
Arauca	42.8	42.8	<b>41.6</b>	-	48.4	45.4	46.4	41.9	71.0	128.5	88.7	45.9	51.2
Atlantico	53.4	53.6	54.1	-	<b>51.6</b>	56.8	74.4	55.1	68.5	90.7	55.6	62.3	55.1
Bogota	108.6	111.4	118.8	-	115.2	103.5	96.1	126.2	163.8	431.6	368.3	<b>87.1</b>	104.5
Bolivar	45.3	46.3	49.6	-	<b>41.2</b>	48.8	50.9	54.5	47.2	79.2	45.8	48.0	49.1
Boyaca	46.8	46.5	46.8	-	43.0	45.9	45.9	51.5	54.7	78.0	<b>42.7</b>	47.3	48.3
Caldas	36.0	36.0	31.6	-	31.0	<b>29.0</b>	39.6	30.5	45.9	59.9	41.1	29.2	30.1
Caqueta	51.8	51.8	<b>36.8</b>	-	47.1	42.2	59.4	37.8	83.1	75.8	71.9	52.4	42.3
Casanare	53.0	53.0	40.5	-	37.0	33.5	46.6	36.8	64.4	134.3	57.5	<b>30.2</b>	37.5
Cauca	<b>38.1</b>	<b>38.1</b>	42.2	-	41.6	44.0	39.8	47.5	54.8	65.9	42.1	42.2	48.2
Cesar	41.2	41.2	45.8	-	42.2	44.3	44.7	53.9	57.8	84.6	50.5	<b>39.1</b>	48.7
Choco	40.9	40.9	40.4	-	36.0	36.3	42.3	39.9	52.1	61.5	44.3	<b>33.9</b>	39.1
Cordoba	46.3	51.5	49.9	-	<b>43.0</b>	47.9	49.2	52.5	46.2	77.7	118.5	43.7	51.5
Cundinamarca	32.1	32.1	27.9	-	28.4	29.5	35.7	<b>27.8</b>	42.6	50.0	32.7	33.2	29.7
Guainia	60.6	60.6	<b>59.7</b>	-	63.0	61.9	82.7	62.2	86.0	97.6	84.4	66.5	62.6
Guajira	57.2	56.6	58.3	-	<b>54.9</b>	58.8	58.4	62.4	67.9	129.4	97.0	59.1	59.4
Guaviare	52.9	52.9	50.0	-	<b>45.9</b>	48.4	59.3	51.7	70.8	73.3	50.0	50.8	48.1
Huila	41.0	43.5	38.9	-	37.9	37.6	40.0	<b>35.9</b>	55.1	66.4	44.1	-	37.8
Magdalena	58.9	58.9	59.3	-	<b>51.9</b>	55.5	62.0	60.9	66.1	103.3	63.5	55.2	54.7
Meta	32.0	32.0	27.7	-	26.9	29.8	34.6	<b>24.9</b>	38.8	75.7	44.4	33.8	29.9
Naria	36.3	36.3	33.2	-	36.7	<b>31.7</b>	40.9	38.6	58.4	58.9	59.2	32.9	33.4
Norte Santander	32.1	32.1	32.8	-	<b>29.7</b>	31.6	32.1	34.6	44.1	71.8	36.7	29.9	32.9
Putumayo	40.7	40.7	33.5	-	31.7	32.1	43.1	32.2	52.9	58.1	50.5	39.1	<b>26.3</b>
Quindio	29.9	29.6	29.8	-	28.8	28.7	35.2	30.7	38.9	53.2	43.8	30.4	<b>27.0</b>
Risaralda	38.2	37.4	43.5	-	<b>37.3</b>	40.2	42.8	49.7	44.2	86.0	67.5	37.9	39.9
San Andres	67.1	67.9	67.3	-	89.9	67.3	110.4	<b>66.8</b>	125.2	90.8	91.2	-	-
Santander	22.6	22.6	21.0	-	<b>18.2</b>	19.5	22.3	21.4	25.7	72.6	25.8	19.4	18.9
Sucre	50.8	51.0	50.6	-	<b>41.7</b>	49.1	51.4	51.8	47.9	82.5	67.7	46.9	50.2
Tolima	28.8	28.8	28.0	-	29.2	<b>27.1</b>	30.8	28.1	50.8	41.7	32.4	27.8	27.3
Valle	33.1	33.1	32.1	-	34.0	32.4	37.6	36.2	54.8	61.8	37.2	34.5	<b>31.3</b>
Vaupes	176.2	176.2	160.5	-	147.1	145.3	141.7	171.6	168.0	381.9	360.5	<b>133.8</b>	141.7
Vichada	61.0	61.0	60.6	-	61.9	59.1	66.8	60.3	99.7	109.9	102.0	<b>55.0</b>	67.0

Table 17: 2-month ahead percent absolute errors in Colombia for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
Johor	36.0	36.0	36.1	37.9	36.8	34.6	38.0	36.2	51.7	53.1	<b>32.6</b>	33.8	34.0
Kedah	36.3	35.8	35.3	41.5	35.9	34.0	42.3	34.9	60.6	53.9	35.8	<b>33.8</b>	34.7
Kelantan	51.6	50.8	50.1	62.6	54.9	54.1	62.6	<b>49.9</b>	93.7	82.2	68.1	56.7	59.5
Kuala Lumpur and Putrajaya	35.7	35.8	35.5	38.0	34.5	32.7	35.8	35.2	51.0	59.1	36.0	<b>32.5</b>	32.9
Labuan	73.6	74.1	76.0	<b>66.4</b>	77.7	78.0	84.8	78.9	106.5	151.3	148.7	82.7	78.8
Malacca	-	-	-	- 37.3	34.1	31.3	34.6	-	-	56.8	36.8	31.4	<b>31.3</b>
Negeri Sembilan	29.1	29.1	29.0	30.1	<b>28.9</b>	29.3	30.0	29.0	38.2	48.4	32.8	29.4	30.8
Pahang	33.9	33.8	33.1	37.8	32.9	34.7	35.9	<b>32.5</b>	50.9	62.7	40.0	36.0	36.1
Perak	31.2	31.2	30.8	30.1	30.1	35.4	<b>29.1</b>	30.3	39.5	95.1	52.4	37.5	39.7
Perlis	62.7	62.7	61.6	62.9	<b>47.7</b>	53.5	65.7	60.7	90.2	122.4	96.7	51.5	51.4
Pulau Pinang	-	-	-	- 38.6	36.1	36.9	<b>35.5</b>	-	-	95.0	46.3	36.6	37.1
Sabah	36.7	36.4	37.9	40.3	40.6	37.6	42.6	39.5	73.5	48.8	<b>35.6</b>	38.0	37.5
Sarawak	33.1	33.1	34.1	31.2	30.3	37.3	<b>27.3</b>	35.9	43.8	81.7	39.8	39.7	39.2
Selangor	33.1	32.7	33.1	34.3	33.2	32.6	34.0	33.4	50.4	57.5	34.6	<b>32.1</b>	33.0
Terengganu	48.3	48.5	47.3	<b>45.6</b>	46.7	52.1	47.1	46.4	57.3	171.2	83.2	54.2	55.0

Table 18: 2-month ahead percent absolute errors in Malaysia for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
Aguascalientes	132.8	132.8	129.1	109.4	123.4	115.6	169.7	125.4	158.8	153.9	182.4	111.8	<b>105.9</b>
Baja California	359.1	359.1	350.1	173.3	104.7	212.5	144.4	341.1	183.3	2130.2	1957.2	<b>103.2</b>	206.3
Baja California Sur	92.4	92.5	<b>86.8</b>	134.9	115.2	107.4	135.3	89.8	183.7	2255.8	1891.9	128.3	130.1
Campeche	79.9	79.9	85.3	80.8	<b>74.4</b>	81.4	75.2	90.7	83.8	421.1	112.8	81.2	80.4
Chiapas	57.9	57.5	54.7	70.2	49.4	50.3	70.3	54.6	89.3	128.0	72.9	<b>43.3</b>	54.8
Chihuahua	129.8	130.2	127.5	181.6	115.8	119.0	185.4	124.9	294.2	146.6	159.1	<b>109.5</b>	120.1
Coahuila	86.6	87.0	88.5	143.6	88.4	89.2	143.6	91.1	127.7	<b>76.5</b>	82.8	94.8	95.2
Colima	71.2	71.2	69.3	89.1	63.8	63.5	89.1	70.0	97.9	194.5	90.7	<b>61.3</b>	64.9
Durango	138.6	138.8	135.3	162.2	129.7	133.9	188.2	131.8	218.5	317.5	320.9	<b>124.4</b>	146.6
Guanajuato	194.8	193.2	185.7	276.7	156.7	173.3	267.3	181.5	268.1	539.7	626.3	188.1	<b>148.3</b>
Guerrero	67.4	66.9	66.8	76.8	66.4	<b>63.9</b>	76.9	68.1	86.2	143.7	82.7	64.9	66.1
Hidalgo	93.7	93.8	94.2	128.2	80.9	81.0	128.2	94.8	151.2	96.4	102.4	84.3	<b>70.7</b>
Jalisco	70.5	85.7	68.2	102.3	61.7	59.7	102.2	60.0	105.9	87.3	73.8	71.3	<b>58.5</b>
Mexico	113.9	113.7	113.4	118.5	115.5	112.9	159.4	113.1	250.0	138.7	153.2	<b>108.0</b>	117.5
Mexico City	-	-	-	-	-	-	-	-	-	-	-	-	-
Michoacan	63.7	62.3	<b>56.0</b>	71.0	57.9	57.4	71.0	62.3	79.8	75.6	60.1	61.3	61.6
Morelos	69.8	70.0	69.9	95.8	62.6	64.1	95.8	69.9	105.6	<b>61.8</b>	68.4	64.8	62.6
Nayarit	79.0	79.0	73.6	90.0	<b>62.8</b>	66.6	90.0	72.4	120.1	95.0	83.5	65.2	64.1
Nuevo Leon	85.3	80.5	95.2	143.7	91.1	83.7	143.3	118.3	147.0	128.1	118.4	<b>78.6</b>	84.2
Oaxaca	71.5	80.1	69.4	93.0	58.3	59.8	92.9	62.4	108.4	96.2	99.0	68.9	<b>57.2</b>
Puebla	76.5	76.4	71.8	110.5	69.2	71.2	110.5	67.6	121.0	79.4	81.7	75.3	<b>67.1</b>
Queretaro	99.5	102.0	100.5	123.7	<b>96.6</b>	99.2	107.5	100.6	133.7	114.3	117.3	99.4	97.6
Quintana Roo	69.3	69.3	67.9	64.3	61.0	61.2	64.4	66.6	63.9	135.9	78.6	62.4	<b>54.0</b>
San Luis Potosi	89.8	89.8	86.2	106.7	78.5	79.2	106.7	82.7	140.7	92.4	94.8	76.2	75.7
Sinaloa	80.7	80.9	83.5	94.5	87.7	87.4	93.4	86.4	<b>74.8</b>	87.9	84.7	92.7	88.9
Sonora	90.3	91.2	90.9	137.4	94.8	95.8	137.3	94.8	127.9	505.9	279.0	106.3	<b>90.2</b>
Tabasco	78.7	85.2	79.4	74.3	77.1	78.0	74.2	76.8	113.3	234.2	<b>72.7</b>	79.4	76.8
Tamaulipas	90.0	89.9	89.5	112.4	78.1	79.1	112.4	89.4	103.6	144.6	104.0	<b>76.2</b>	82.5
Tlaxcala	-	-	-	-	-	-	-	-	-	-	-	-	-
Veracruz	57.7	54.6	54.7	80.5	49.1	52.9	80.5	55.8	78.1	106.4	82.7	69.0	<b>45.7</b>
Yucatan	74.2	73.2	71.4	86.5	61.3	67.8	86.9	83.2	74.7	286.4	134.5	79.5	<b>60.1</b>
Zacatecas	123.1	123.9	122.3	111.7	118.3	117.1	192.9	120.7	304.8	190.9	201.2	<b>111.2</b>	118.8

Table 19: 2-month ahead percent absolute errors in Mexico for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
Iquitos	72.5	72.3	68.7	101.8	<b>52.8</b>	-	101.3	68.8	132.6	80.6	82.6	-	-

Table 20: 2-month ahead percent absolute errors in Peru for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
San Juan	79.3	67.1	54.0	55.1	<b>31.7</b>	-	55.1	47.5	42.0	60.6	39.7	-	-

Table 21: 2-month ahead percent absolute errors in Puerto Rico for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
Amnat Charoen	<b>57.6</b>	57.7	71.5	87.7	82.0	73.3	87.7	92.1	94.5	99.7	87.3	75.9	74.7
Ang Thong	58.1	58.1	58.0	75.2	55.8	55.6	74.8	60.0	91.9	78.5	80.2	58.1	53.4
Bangkok	48.7	48.3	43.3	60.0	38.7	39.5	60.0	40.1	71.1	76.2	62.5	39.7	<b>38.4</b>
Bungkan	87.6	<b>87.6</b>	88.4	118.8	116.4	109.5	118.8	92.2	186.9	89.0	145.2	100.5	140.9
Buri Ram	<b>45.8</b>	47.2	46.7	72.1	49.2	45.8	72.1	52.1	105.2	81.5	73.4	49.9	46.8
Chachoengsao	45.2	45.2	41.5	54.0	44.7	47.0	54.0	<b>40.5</b>	53.0	140.9	76.0	54.4	49.7
Chai Nat	63.9	63.9	58.6	76.8	57.2	58.4	76.2	57.4	85.3	73.0	<b>56.1</b>	60.3	57.6
Chaiyaphum	55.3	55.3	55.0	78.3	58.3	59.8	78.3	<b>54.7</b>	70.6	88.5	79.8	66.8	62.5
Chanthaburi	38.3	38.3	<b>36.2</b>	79.3	38.5	40.8	79.3	36.7	78.1	81.2	40.3	51.9	42.4
Chiang Mai	46.2	46.7	39.8	87.0	38.7	40.2	87.0	43.4	85.9	68.9	55.4	48.5	<b>36.0</b>
Chiang Rai	59.9	60.0	48.3	93.2	50.0	57.4	93.2	<b>41.2</b>	124.5	77.2	60.1	66.4	59.6
Chon Buri	45.2	45.2	45.4	53.9	48.2	47.0	53.9	45.5	67.4	66.7	<b>43.2</b>	46.5	55.5
Chumphon	50.6	49.9	47.7	52.4	43.2	45.3	52.4	46.1	63.3	80.2	54.2	48.2	<b>41.1</b>
Kalasin	43.2	43.2	<b>40.5</b>	74.0	43.2	43.3	74.0	41.1	95.9	71.9	62.5	50.6	46.2
Kamphaeng Phet	68.9	63.2	49.5	72.5	<b>41.1</b>	52.5	72.5	41.5	93.1	141.6	84.1	67.2	46.4
Kanchanaburi	54.8	51.9	49.7	70.2	48.2	50.4	70.2	49.2	79.1	86.8	57.6	59.4	<b>47.3</b>
Khon Kaen	59.2	59.2	<b>53.2</b>	62.2	55.7	55.8	62.2	53.8	83.8	86.0	68.6	58.7	57.7
Krabi	62.2	62.2	62.3	50.0	52.2	51.5	50.0	62.5	67.7	198.3	63.2	51.5	<b>43.1</b>
Lampang	56.6	56.7	46.8	107.4	47.0	50.0	107.4	<b>46.2</b>	106.1	69.3	64.8	59.8	49.7
Lamphun	62.9	63.3	38.9	90.1	35.0	39.2	90.1	<b>32.9</b>	113.6	130.4	113.2	45.7	42.8
Loei	52.3	52.4	<b>51.9</b>	98.2	57.1	59.2	98.2	54.6	100.3	79.1	62.7	69.3	62.2
Lop Buri	57.9	57.9	51.6	66.9	45.1	46.0	66.9	47.7	81.2	73.8	49.7	46.9	<b>43.7</b>
Mae Hong Son	62.8	62.8	65.8	107.8	73.5	66.3	107.8	75.3	136.0	64.2	<b>60.7</b>	64.8	72.9
Maha Sarakham	59.4	59.5	56.5	79.6	52.0	55.0	79.6	56.1	99.4	80.6	76.0	62.1	<b>48.2</b>
Mukdahan	54.8	54.8	<b>48.2</b>	94.9	60.1	57.4	94.9	57.7	115.6	79.3	62.8	65.3	64.4
Nakhon Nayok	80.2	80.2	<b>74.7</b>	91.8	<b>41.1</b>	74.2	95.6	71.8	140.1	138.0	95.7	77.6	71.9
Nakhon Pathom	34.1	34.0	29.7	49.4	27.1	26.2	49.4	29.7	42.3	54.5	32.4	<b>25.3</b>	25.6
Nakhon Phanom	58.9	<b>58.9</b>	60.2	110.8	72.1	70.2	110.8	63.3	96.9	71.0	77.9	71.4	81.3
Nakhon Ratchasima	<b>51.3</b>	51.4	51.9	72.8	54.1	53.2	72.8	53.9	85.8	81.5	69.8	55.4	54.6
Nakhon Sawan	45.2	45.0	39.6	55.9	38.5	<b>38.2</b>	55.9	39.7	67.5	76.2	49.2	41.4	39.6
Nakhon Si Thammarat	32.7	32.6	30.6	40.5	29.3	29.4	40.5	29.9	48.9	86.5	45.4	30.9	<b>29.0</b>
Nan	76.0	76.0	67.1	87.9	66.1	69.0	87.9	70.4	148.4	<b>64.5</b>	70.3	79.2	70.7
Narathiwat	51.5	51.6	42.1	60.3	35.4	40.2	60.3	37.0	85.3	89.3	60.3	45.8	<b>35.3</b>
Nong Bua Lam Phu	62.9	63.0	59.7	90.4	59.3	64.7	90.4	<b>56.6</b>	124.8	78.8	76.9	72.6	62.2
Nong Khai	61.1	61.2	54.4	84.3	54.1	57.8	84.3	<b>52.1</b>	86.7	79.4	63.2	64.5	57.2
Nonthaburi	44.1	44.1	36.9	66.7	36.0	33.6	66.7	40.2	62.8	92.4	63.3	35.2	<b>32.9</b>
P.Nakhon S.Ayutthaya	44.1	44.1	39.6	58.2	38.3	38.7	58.2	<b>37.8</b>	54.5	77.7	51.0	39.0	39.5
Pathum Thani	51.4	51.4	43.6	59.4	<b>36.2</b>	38.4	59.2	37.5	56.0	121.0	68.1	39.0	36.2
Pattani	46.8	46.8	47.8	55.5	48.1	44.3	55.5	56.3	73.4	84.8	60.2	44.4	<b>42.1</b>
Phangnga	48.9	48.9	47.4	60.6	44.7	45.7	60.7	45.8	84.2	62.6	48.2	46.1	<b>43.9</b>
Phatthalung	57.2	57.2	51.7	57.0	<b>48.7</b>	50.5	57.0	51.1	82.7	128.3	81.4	53.4	48.9
Phayao	82.2	82.1	77.2	107.7	68.2	69.6	107.7	77.4	119.2	79.6	77.3	71.9	<b>60.8</b>
Phetchabun	55.8	62.2	58.3	88.4	53.4	58.3	88.4	54.7	92.2	76.3	<b>39.7</b>	65.8	52.8
Phetchaburi	43.8	44.0	43.0	40.7	40.8	40.2	40.7	43.3	56.6	100.9	47.8	<b>38.9</b>	39.6
Phichit	85.3	85.6	72.2	84.5	62.1	66.2	84.5	67.3	105.3	167.8	132.7	72.8	<b>60.0</b>
Phitsanulok	54.0	53.7	45.3	72.8	42.5	41.4	72.8	47.1	81.3	75.2	62.7	52.5	<b>39.0</b>
Phrae	88.7	87.7	66.5	120.3	54.6	60.8	120.3	57.4	125.7	141.9	111.4	69.7	<b>52.6</b>
Phuket	46.8	46.8	45.1	51.6	42.0	42.1	51.6	43.6	70.8	113.1	66.1	41.7	<b>41.3</b>
Prachin Buri	50.2	50.2	46.2	73.5	43.0	44.3	73.5	43.8	80.1	76.7	61.7	45.8	<b>42.6</b>
Prachuap Khiri Khan	45.2	45.5	38.1	46.8	33.6	38.2	46.8	35.9	54.0	81.7	60.9	45.4	<b>33.0</b>
Ranong	54.9	54.9	56.3	69.2	55.1	53.9	68.3	60.5	101.8	<b>49.4</b>	51.5	57.7	50.9
Ratchaburi	35.9	36.9	33.3	40.3	33.0	31.0	40.3	34.7	42.5	66.7	35.6	<b>27.8</b>	32.6
Rayong	42.9	43.1	41.2	61.1	<b>39.6</b>	43.3	61.1	40.3	78.4	63.0	49.1	51.4	40.1
Roi Et	50.4	50.9	43.8	80.5	42.1	47.7	80.5	<b>40.0</b>	87.0	73.2	56.2	54.0	46.9
Sa Kaeo	56.8	59.1	59.1	73.8	56.0	56.7	73.8	59.2	75.3	84.2	64.2	58.6	<b>53.1</b>
Sakon Nakhon	<b>59.0</b>	59.1	62.8	108.4	64.2	65.1	108.4	67.3	116.6	73.6	60.6	70.7	63.3
Samut Prakan	49.6	48.8	40.4	52.8	35.8	39.7	52.8	<b>34.5</b>	62.7	92.3	52.9	41.9	38.2
Samut Sakhon	36.3	36.3	33.3	41.5	30.0	31.1	41.5	31.4	50.6	68.8	34.3	31.1	<b>30.0</b>
Samut Songkhram	67.6	67.3	64.8	68.0	63.0	60.8	67.7	62.4	68.0	140.6	79.1	<b>54.2</b>	63.5
Saraburi	55.2	55.3	48.3	66.8	40.9	43.3	66.8	41.9	73.5	65.5	52.9	41.8	<b>40.7</b>
Satun	84.0	84.0	83.1	87.4	74.1	76.0	87.4	82.3	117.5	222.3	87.3	79.2	<b>67.3</b>
Si Sa Ket	41.2	40.7	<b>38.8</b>	74.4	40.8	39.9	74.4	40.4	91.4	87.9	64.2	45.7	41.5
Sing Buri	86.8	86.8	87.4	104.9	84.9	84.1	118.7	88.1	135.9	91.8	77.4	83.9	82.1
Songkhla	48.5	48.2	48.8	53.0	45.6	43.3	53.0	49.9	67.2	86.8	54.2	42.1	<b>41.3</b>
Sukhothai	54.6	54.6	49.6	73.4	46.2	48.9	73.4	<b>45.4</b>	65.2	58.5	48.6	51.6	47.1
Suphan Buri	36.9	36.9	32.8	52.9	31.4	30.6	52.3	32.9	55.4	46.7	35.2	<b>29.9</b>	30.4
Surat Thani	59.7	60.6	54.8	59.2	49.1	53.4	59.2	50.7	70.0	186.7	80.6	61.0	<b>48.6</b>
Surin	51.2	51.2	43.8	74.3	41.3	44.1	74.3	44.1	90.3	64.2	51.2	48.6	<b>41.2</b>
Tak	45.4	46.4	40.0	84.1	<b>36.9</b>	45.5	84.1	37.1	106.6	43.0	38.1	62.5	37.9
Trang	50.4	49.0	<b>43.8</b>	69.4	44.7	46.0	69.4	46.2	90.4	69.9	57.0	54.0	45.4
Trat	52.4	52.5	51.8	73.9	49.3	49.3	73.9	52.2	73.6	88.8	66.5	49.0	<b>48.0</b>
Ubon Ratchathani	54.8	56.2	<b>53.3</b>	85.8	55.2	55.1	85.7	59.2	80.1	81.7	67.2	64.2	54.7
Udon Thani	60.7	62.9	<b>56.9</b>	104.7	58.9	59.5	104.7	65.0	134.7	85.7	71.0	63.2	59.9
Uthai Thani	61.9	62.0	55.3	74.2	50.5	54.1	74.2	52.7	108.6	86.6	63.1	63.8	<b>48.9</b>
Uttaradit	49.1	49.2	45.5	83.0	47.4	49.5	83.0	47.7	112.3	50.3	<b>44.7</b>	54.3	51.4
Yala	<b>40.6</b>	40.9	41.5	62.4	44.1	42.5	62.4	44.1	71.4	79.0	49.7	46.2	44.0
Yasothon	54.7	54.3	50.7	78.3	<b>49.3</b>	53.8	78.3	49.8	109.8	81.1	63.5	63.5	50.6

Table 22: 2-month ahead percent absolute errors in Thailand for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

### 3.4.3 3-Month Ahead

location	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
Acre	63.6	65.7	63.9	104.1	<b>60.0</b>	62.9	104.1	64.3	101.2	97.0	74.6	68.0	69.3
Alagoas	68.7	69.0	60.1	101.3	60.9	63.3	101.3	<b>57.4</b>	79.8	119.1	80.9	72.0	67.0
Amapa	93.2	93.6	100.8	68.7	97.5	111.2	<b>68.6</b>	111.6	111.8	544.3	264.7	114.9	117.7
Amazonas	47.9	47.6	42.9	60.6	42.0	<b>39.1</b>	60.6	43.7	77.3	116.9	96.3	40.8	43.7
Bahia	47.1	<b>44.2</b>	53.6	97.8	54.6	57.3	97.8	66.2	106.8	51.4	44.2	67.6	61.7
Ceara	<b>40.2</b>	41.2	40.8	91.2	43.1	45.6	91.2	42.3	90.5	90.2	87.1	57.7	50.5
Distrito Federal	69.2	67.0	<b>51.3</b>	108.8	54.8	52.2	108.8	52.2	96.6	66.2	63.8	70.2	57.1
Espirito Santo	61.2	60.9	60.0	87.4	60.1	61.5	87.4	<b>59.1</b>	90.8	122.1	94.3	59.7	64.8
Goias	38.9	33.9	<b>28.6</b>	88.3	31.0	30.6	88.3	36.6	92.2	58.1	47.9	43.6	35.5
Maranhao	72.4	72.9	71.3	95.7	<b>58.3</b>	68.8	95.7	74.2	142.7	178.7	96.4	67.6	63.7
Mato Grosso	54.5	54.8	67.3	86.8	56.8	59.8	86.8	86.8	104.6	52.9	<b>46.1</b>	54.6	55.7
Mato Grosso do Sul	67.6	67.5	68.1	123.1	69.5	65.9	123.1	72.2	128.3	<b>55.6</b>	57.5	69.6	66.7
Minas Gerais	71.3	70.2	69.9	128.7	<b>68.4</b>	74.5	128.7	76.6	120.6	86.9	80.2	73.1	76.6
Para	41.5	42.8	40.3	77.7	45.1	43.6	77.7	<b>40.0</b>	121.6	125.2	67.4	73.7	45.0
Paraiba	47.4	47.1	53.7	82.9	47.9	52.9	82.9	67.9	75.5	74.6	59.6	<b>44.4</b>	52.3
Parana	74.0	72.9	65.6	120.0	70.0	66.3	120.0	70.1	94.5	67.0	<b>60.8</b>	74.0	68.2
Pernambuco	43.5	43.4	<b>42.7</b>	82.2	44.9	43.1	82.2	56.8	94.9	64.3	59.0	53.8	45.6
Piaui	51.8	<b>51.6</b>	57.7	101.5	55.5	55.6	101.5	68.6	107.0	104.8	96.7	56.6	56.3
Rio Grande do Norte	65.6	65.0	62.1	81.8	59.0	56.7	81.8	66.0	82.1	106.8	107.2	60.9	<b>55.7</b>
Rio Grande do Sul	80.0	76.2	74.1	148.0	78.6	76.5	148.0	73.5	127.8	<b>71.0</b>	81.8	80.7	82.5
Rio de Janeiro	76.6	74.2	82.3	102.2	68.3	74.3	102.2	102.8	109.4	415.6	216.8	<b>52.7</b>	63.3
Rondonia	<b>45.1</b>	46.9	50.6	71.9	47.5	49.9	71.9	58.2	81.0	140.3	69.6	54.5	47.6
Roraima	59.2	59.3	60.6	<b>55.7</b>	61.4	62.6	55.7	73.4	67.9	229.7	90.8	58.3	60.3
Santa Catarina	77.5	76.9	<b>49.8</b>	122.2	55.4	64.3	122.2	53.3	132.2	77.0	73.9	77.1	78.0
Sao Paulo	67.4	68.0	66.8	113.2	64.5	62.5	113.2	73.8	123.3	<b>44.0</b>	53.7	64.9	62.8
Sergipe	74.8	71.0	71.4	96.1	76.0	69.8	96.1	78.9	102.3	<b>68.9</b>	<b>66.6</b>	69.6	69.5
Tocantins	<b>61.9</b>	62.3	68.8	91.9	63.0	64.5	91.9	78.0	77.6	86.0	64.4	62.2	62.4

Table 23: 3-month ahead percent absolute errors in Brazil for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
Amazonas	64.8	64.8	63.3	-	56.8	65.6	67.3	74.5	82.1	111.8	94.5	<b>53.1</b>	55.8
Antioquia	43.7	43.5	42.1	-	<b>39.4</b>	43.0	51.8	46.6	43.6	74.5	42.7	43.2	46.2
Arauca	43.0	43.0	<b>41.2</b>	-	50.8	43.9	49.4	41.7	82.7	127.3	102.1	47.4	47.4
Atlantico	65.9	65.9	59.9	-	69.6	62.7	96.6	<b>58.7</b>	112.5	85.5	67.0	70.7	69.5
Bogota	75.6	72.1	110.0	-	63.2	91.0	80.0	148.0	118.7	230.6	210.1	<b>52.1</b>	59.5
Bolivar	58.5	64.2	57.1	-	<b>52.0</b>	56.8	66.8	53.5	63.5	70.7	54.7	55.0	55.5
Boyaca	54.9	55.2	<b>53.0</b>	-	54.2	53.5	58.0	57.1	74.0	74.8	53.0	57.5	53.6
Caldas	37.3	37.3	35.2	-	<b>33.3</b>	34.1	39.9	37.1	57.9	60.7	42.3	35.2	35.7
Caqueta	60.4	60.4	<b>50.9</b>	-	63.2	53.9	74.6	52.3	105.8	72.8	57.6	62.1	58.3
Casanare	78.0	78.0	54.8	-	48.0	59.6	62.6	<b>38.7</b>	89.9	137.3	84.7	43.8	65.9
Cauca	49.8	49.8	53.9	-	50.1	<b>48.9</b>	49.6	59.0	68.1	64.6	52.5	51.2	50.3
Cesar	51.1	51.2	46.5	-	43.4	46.5	57.7	49.2	81.1	80.4	51.4	<b>41.7</b>	49.6
Choco	48.6	48.6	44.6	-	44.3	<b>42.2</b>	54.5	46.9	76.2	61.0	60.5	42.8	44.8
Cordoba	63.1	58.8	65.7	-	53.2	56.8	62.7	72.7	63.8	64.7	95.4	52.3	<b>51.0</b>
Cundinamarca	38.2	38.2	<b>34.7</b>	-	38.6	35.6	47.1	37.4	54.1	48.8	39.7	40.5	40.2
Guainia	69.7	69.7	<b>66.1</b>	-	72.6	72.1	105.4	66.5	109.8	94.5	102.6	76.2	72.4
Guajira	60.3	59.0	69.3	-	55.0	66.0	66.2	80.1	86.9	110.8	92.8	58.9	<b>54.2</b>
Guaviare	60.8	60.8	56.3	-	58.6	54.7	70.9	55.1	89.9	73.5	65.4	57.4	<b>53.8</b>
Huila	56.2	56.1	54.1	-	51.2	<b>47.4</b>	51.8	54.2	80.9	69.2	56.4	-	47.8
Magdalena	64.7	64.1	63.1	-	61.2	64.3	76.9	67.7	90.9	100.2	94.6	<b>59.7</b>	63.3
Meta	46.2	46.2	33.6	-	36.1	35.6	46.4	<b>27.4</b>	55.9	73.7	56.7	43.2	42.4
Naria	42.1	42.1	<b>36.1</b>	-	38.4	38.5	48.6	42.7	62.6	56.9	59.0	37.5	37.9
Norte Santander	37.3	36.5	39.0	-	35.4	40.1	37.8	45.3	54.9	63.5	41.9	<b>32.8</b>	37.0
Putumayo	49.9	49.5	39.2	-	<b>38.2</b>	38.6	57.1	46.5	66.8	57.2	57.8	49.8	40.5
Quindio	42.7	43.1	42.1	-	39.1	39.3	45.0	42.7	61.5	53.7	56.3	40.1	<b>38.2</b>
Risaralda	<b>46.0</b>	46.1	55.6	-	46.8	55.8	57.0	66.7	55.8	84.4	67.0	49.8	50.9
San Andres	<b>74.5</b>	78.3	81.9	-	159.4	81.9	130.1	87.6	159.4	92.2	93.3	-	-
Santander	30.5	30.5	28.7	-	26.1	28.2	29.9	31.2	33.2	71.2	39.9	<b>25.1</b>	28.6
Sucre	62.0	62.2	51.9	-	<b>47.1</b>	56.3	62.8	52.3	76.1	66.9	75.8	47.1	48.3
Tolima	36.9	36.9	37.0	-	32.9	36.5	39.6	39.0	64.2	40.2	38.3	33.1	<b>32.7</b>
Valle	42.6	41.7	43.8	-	42.8	42.3	50.6	54.4	69.4	61.4	41.9	45.2	45.1
Vaupes	174.4	174.4	207.0	-	151.3	155.9	<b>125.0</b>	243.7	134.4	356.8	350.3	139.7	139.7
Vichada	70.9	70.9	77.4	-	57.4	62.6	78.6	88.8	133.7	106.4	114.8	60.1	<b>56.3</b>

Table 24: 3-month ahead percent absolute errors in Colombia for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
Johor	42.1	42.1	41.1	43.9	<b>34.0</b>	40.0	45.0	40.5	67.5	51.9	36.2	37.9	38.7
Kedah	41.8	41.5	39.8	43.9	43.7	39.1	52.7	39.7	71.9	50.0	46.1	38.2	<b>37.9</b>
Kelantan	61.0	59.5	<b>57.5</b>	74.0	58.8	62.7	74.0	58.4	108.5	81.4	74.2	63.7	63.8
Kuala Lumpur and Putrajaya	39.9	42.8	38.7	42.2	35.7	38.7	42.6	<b>35.3</b>	66.2	57.9	36.8	38.0	37.5
Labuan	88.9	88.3	90.5	<b>73.8</b>	90.7	98.4	99.9	94.8	142.0	173.3	142.1	100.6	104.0
Malacca	-	-	-	43.7	37.2	<b>36.6</b>	41.6	-	-	55.9	40.7	37.0	<b>36.6</b>
Negeri Sembilan	33.9	34.0	32.7	34.9	30.9	32.6	35.3	33.1	51.1	44.7	32.6	<b>30.8</b>	31.4
Pahang	41.7	42.0	41.3	46.6	41.1	41.2	45.8	40.5	61.9	60.9	44.9	41.0	<b>40.5</b>
Perak	38.6	38.6	39.4	35.6	41.8	40.6	<b>35.1</b>	43.2	53.0	89.3	55.9	43.3	46.2
Perlis	69.4	69.4	69.1	67.4	<b>61.3</b>	63.7	70.4	68.9	116.4	112.1	91.5	62.4	62.5
Pulau Pinang	-	-	-	49.8	<b>43.3</b>	45.1	50.0	-	-	88.3	49.2	43.4	45.1
Sabah	38.2	38.4	40.0	42.1	<b>36.8</b>	43.0	48.3	43.7	85.6	49.6	37.8	40.9	42.2
Sarawak	45.5	45.6	45.0	42.3	<b>38.1</b>	46.0	39.0	47.9	57.6	81.1	40.0	51.0	49.0
Selangor	37.0	37.0	36.4	36.1	35.7	37.7	38.1	36.1	63.6	54.0	<b>35.6</b>	35.9	36.6
Terengganu	59.4	65.2	61.0	55.2	<b>54.6</b>	62.5	56.9	56.8	72.5	179.3	132.8	62.2	62.9

Table 25: 3-month ahead percent absolute errors in Malaysia for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
Aguascalientes	135.9	135.9	133.3	115.0	117.6	<b>103.8</b>	188.2	130.7	195.8	153.9	186.3	117.6	111.8
Baja California	521.6	521.6	530.5	223.3	<b>117.9</b>	202.9	255.6	635.6	281.7	2029.3	1974.3	275.2	196.6
Baja California Sur	67.4	<b>67.3</b>	77.1	161.5	124.1	102.9	161.7	92.5	174.0	1944.7	1699.5	130.9	143.5
Campeche	91.5	91.5	95.2	100.1	<b>83.4</b>	90.1	104.1	99.6	127.1	420.2	132.5	89.9	<b>83.4</b>
Chiapas	58.4	59.0	<b>48.0</b>	89.0	59.5	59.6	89.1	48.3	113.9	118.8	88.6	50.7	62.1
Chihuahua	146.1	146.6	137.9	209.4	121.6	131.5	215.0	129.2	344.5	155.4	168.7	<b>118.8</b>	127.3
Coahuila	94.4	94.1	90.1	146.6	102.9	92.3	146.7	87.7	157.7	<b>77.0</b>	81.3	101.2	103.0
Colima	75.8	75.8	70.2	107.9	72.2	77.4	107.9	72.3	129.8	189.6	77.1	<b>66.1</b>	76.9
Durango	221.4	220.8	220.0	280.8	199.3	216.6	319.5	219.3	427.6	483.8	617.6	<b>197.4</b>	221.3
Guanajuato	334.1	330.5	335.1	538.9	274.7	290.8	546.7	347.7	721.4	812.1	945.2	313.7	<b>258.9</b>
Guerrero	86.9	81.7	78.2	94.1	79.2	75.7	94.2	82.6	118.4	146.9	118.8	78.0	<b>74.5</b>
Hidalgo	94.6	94.7	92.5	147.6	<b>83.0</b>	89.8	147.6	92.3	196.6	101.3	110.9	97.1	83.0
Jalisco	77.1	74.5	65.7	140.2	72.0	66.6	140.3	<b>59.7</b>	133.6	85.6	87.7	81.9	71.5
Mexico	113.7	114.5	111.7	122.1	113.5	<b>104.8</b>	156.9	112.4	242.6	142.0	163.6	112.4	106.1
Mexico City	-	-	-	-	-	-	-	-	-	-	-	-	-
Michoacan	68.7	70.1	76.2	97.7	74.0	75.5	97.8	86.5	100.6	74.4	<b>61.9</b>	75.1	72.9
Morelos	77.9	77.7	74.2	117.5	73.1	71.6	117.5	73.1	159.5	<b>61.7</b>	72.6	73.6	73.3
Nayarit	81.4	81.4	80.0	111.1	72.9	76.1	112.1	81.7	170.3	93.8	91.6	71.6	<b>70.7</b>
Nuevo Leon	94.6	102.2	102.6	189.1	98.1	<b>91.1</b>	188.6	108.3	203.1	140.6	136.5	96.2	95.6
Oaxaca	81.8	82.9	75.0	116.2	71.1	67.3	116.2	69.8	143.7	91.2	94.8	74.7	<b>65.9</b>
Puebla	94.8	94.0	94.5	144.3	88.2	87.6	144.4	97.0	177.7	<b>81.4</b>	92.0	91.1	86.1
Queretaro	111.7	111.0	110.3	157.6	106.0	107.6	141.6	109.7	131.1	114.2	116.9	<b>105.4</b>	106.5
Quintana Roo	85.5	85.5	74.7	92.0	71.8	<b>66.3</b>	92.0	77.0	69.9	134.7	88.6	68.1	67.2
San Luis Potosi	96.7	96.5	87.8	115.1	83.3	83.5	115.1	84.7	110.3	93.6	103.3	<b>81.6</b>	84.5
Sinaloa	89.4	90.0	87.1	115.8	99.1	90.2	117.3	<b>85.3</b>	109.2	88.1	101.4	100.5	95.1
Sonora	113.9	113.9	112.3	167.5	117.7	113.8	167.5	111.7	162.2	535.1	160.1	133.1	<b>108.1</b>
Tabasco	82.8	81.0	78.8	82.2	79.0	79.1	82.2	<b>78.8</b>	116.9	237.4	89.0	86.7	84.9
Tamaulipas	99.4	99.4	102.5	139.7	88.3	94.1	139.7	105.7	145.1	143.9	106.5	<b>87.9</b>	94.5
Tlaxcala	-	-	-	-	-	-	-	-	-	-	-	-	-
Veracruz	72.1	59.4	55.0	108.9	59.8	54.4	108.9	55.3	73.9	107.7	89.6	75.3	<b>53.2</b>
Yucatan	93.8	93.8	96.8	124.4	<b>77.0</b>	85.6	124.4	103.8	115.8	288.2	173.1	91.8	78.4
Zacatecas	119.3	119.3	117.2	114.3	112.2	113.4	196.4	115.4	308.5	189.6	204.0	<b>111.0</b>	115.7

Table 26: 3-month ahead percent absolute errors in Mexico for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
Iquitos	86.3	85.0	78.1	120.9	<b>69.7</b>	-	120.3	82.8	165.3	81.4	86.2	-	-

Table 27: 3-month ahead percent absolute errors in Peru for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
San Juan	106.6	89.7	79.2	76.8	<b>43.9</b>	-	76.8	74.1	67.6	59.9	<b>43.9</b>	-	-

Table 28: 3-month ahead percent absolute errors in Puerto Rico for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
Ammat Charoen	68.8	68.8	<b>63.6</b>	107.1	64.4	66.6	107.1	65.6	143.0	100.9	95.1	91.1	73.6
Ang Thong	63.7	64.8	62.9	88.0	71.7	60.0	91.6	63.2	124.2	81.5	82.6	63.1	<b>59.1</b>
Bangkok	65.8	65.1	53.8	75.6	49.6	<b>43.8</b>	75.6	45.2	90.4	74.6	72.5	47.2	43.9
Bungkan	98.1	98.0	107.9	151.1	106.8	142.8	151.1	118.1	205.3	<b>88.7</b>	147.7	115.3	147.8
Buri Ram	56.2	57.4	<b>53.8</b>	94.4	56.6	55.9	94.4	55.1	131.2	82.2	81.2	70.7	55.9
Chachoengsao	64.3	64.4	49.6	74.3	52.4	49.0	74.3	<b>42.8</b>	85.8	148.0	101.3	81.4	63.3
Chai Nat	67.5	66.9	64.7	102.9	62.4	<b>61.8</b>	103.8	66.1	119.4	72.3	66.5	66.3	62.8
Chaiyaphum	66.5	66.6	59.6	102.7	63.8	61.4	102.7	<b>55.3</b>	88.8	88.2	70.0	80.1	72.4
Chanthaburi	50.0	50.0	51.3	106.5	51.2	56.9	106.5	54.5	127.0	81.3	47.7	70.1	55.8
Chiang Mai	57.9	58.3	44.9	119.9	<b>37.5</b>	48.5	119.9	53.6	125.4	68.8	68.7	63.1	50.9
Chiang Rai	73.9	74.2	59.0	128.8	64.6	61.1	128.8	<b>55.0</b>	165.0	75.7	80.3	78.5	70.7
Chon Buri	55.3	55.3	55.5	65.3	54.8	56.8	65.3	55.7	87.6	65.0	<b>46.5</b>	55.8	64.9
Chumphon	54.8	54.9	50.1	65.0	<b>45.1</b>	45.9	65.0	47.7	79.7	74.3	68.2	53.8	48.1
Kalasin	55.3	55.6	<b>48.9</b>	101.9	56.8	51.6	101.9	52.1	122.9	72.7	61.1	71.5	60.7
Kamphaeng Phet	93.0	82.4	63.6	95.8	57.1	59.9	95.8	<b>49.9</b>	130.8	152.2	105.4	88.5	58.8
Kanchanaburi	66.3	62.4	56.6	85.5	63.7	58.8	85.5	<b>54.5</b>	113.9	93.3	76.5	73.4	57.6
Khon Kaen	67.5	67.8	59.9	87.8	67.8	62.9	87.8	<b>57.7</b>	100.7	85.6	82.2	76.2	70.5
Krabi	90.9	90.9	78.5	65.4	73.0	69.3	65.4	72.2	97.6	208.6	112.9	71.5	<b>61.7</b>
Lampang	79.0	78.6	67.7	133.8	63.9	<b>59.9</b>	133.8	64.2	145.4	69.9	73.3	77.8	67.8
Lamphun	74.4	74.5	49.9	112.9	38.3	34.6	112.9	48.7	144.8	136.0	122.2	55.5	<b>29.1</b>
Loei	64.0	64.2	62.2	121.9	<b>58.7</b>	64.5	121.9	62.4	148.3	79.5	63.5	85.4	71.6
Lop Buri	66.0	66.6	55.0	85.8	55.9	52.1	85.8	<b>47.9</b>	106.0	76.2	60.8	53.8	49.9
Mae Hong Son	65.0	65.1	78.1	133.4	70.2	74.7	133.4	96.9	160.4	<b>64.1</b>	67.5	77.1	84.6
Maha Sarakham	70.5	70.4	61.0	105.4	66.9	57.9	105.4	<b>53.5</b>	121.7	79.6	83.0	76.5	59.8
Mukdahan	66.8	<b>66.8</b>	68.4	126.5	77.4	70.5	126.5	74.5	149.7	79.9	72.6	88.1	78.8
Nakhon Nayok	93.3	91.1	81.6	111.6	90.3	83.0	112.6	<b>75.4</b>	192.6	140.2	109.0	83.6	82.8
Nakhon Pathom	<b>44.4</b>	44.4	38.4	63.5	<b>26.9</b>	33.5	63.5	36.6	56.8	52.5	37.3	30.8	30.8
Nakhon Phanom	64.8	64.8	67.3	138.4	86.0	71.9	138.4	84.2	140.6	71.5	79.5	81.4	81.9
Nakhon Ratchasima	63.6	62.6	62.4	94.0	64.6	<b>61.3</b>	94.0	63.8	109.4	82.4	73.7	70.3	65.8
Nakhon Sawan	58.3	57.2	49.0	75.2	<b>45.3</b>	49.6	75.2	48.8	89.0	75.2	58.1	49.4	45.7
Nakhon Si Thammarat	42.6	42.5	41.1	53.3	<b>35.6</b>	37.2	53.3	41.7	63.9	83.6	39.3	39.3	36.4
Nan	71.4	71.4	<b>63.5</b>	114.7	75.7	73.3	114.7	89.8	185.9	65.8	77.8	92.1	75.4
Narathiwat	57.0	56.8	47.4	72.9	54.5	<b>43.3</b>	72.9	46.9	109.4	84.7	68.0	49.1	45.2
Nong Bua Lam Phu	75.3	75.4	68.8	110.9	70.1	72.5	110.9	<b>66.5</b>	169.6	78.8	87.0	91.6	74.2
Nong Khai	69.5	69.4	60.1	108.9	53.9	60.9	108.9	<b>53.6</b>	102.7	78.8	70.6	80.8	66.7
Nonthaburi	56.3	56.4	46.5	88.1	40.5	39.8	88.1	52.3	85.9	87.5	69.7	41.9	<b>39.1</b>
P.Nakhon S.Ayutthaya	56.3	56.3	52.3	77.1	52.7	45.0	77.1	54.8	73.9	77.2	66.2	45.2	<b>44.0</b>
Pathum Thani	61.3	61.3	49.9	81.7	49.5	45.8	81.6	<b>43.1</b>	82.3	122.5	89.7	47.2	43.4
Pattani	55.3	55.5	63.1	71.1	64.4	60.5	71.1	82.2	100.6	85.0	57.5	58.6	<b>54.9</b>
Phangnga	60.9	60.9	51.3	76.7	<b>40.1</b>	53.3	77.0	42.6	93.7	63.2	51.9	56.0	51.3
Phatthalung	65.7	65.7	57.6	74.3	60.8	59.4	74.3	<b>55.8</b>	105.3	125.5	101.9	66.0	59.9
Phayao	70.6	70.1	<b>63.4</b>	141.0	63.7	64.8	141.0	64.1	138.1	82.4	82.4	83.8	75.8
Phetchabun	67.0	71.7	60.5	117.7	<b>41.0</b>	62.0	117.7	50.2	134.8	75.5	43.3	83.3	67.7
Phetchaburi	50.5	50.5	49.9	52.5	47.8	46.2	52.5	51.8	59.4	93.3	79.9	43.1	44.1
Phichit	103.4	98.9	78.0	96.9	64.7	64.6	96.9	69.2	120.1	178.7	134.2	88.1	<b>61.9</b>
Phitsanulok	65.3	65.1	59.1	99.0	<b>44.3</b>	52.5	99.0	56.6	128.2	75.5	70.6	71.5	46.2
Phrae	106.9	107.2	90.9	147.8	85.0	82.4	147.8	80.6	178.2	143.1	137.7	81.8	<b>70.8</b>
Phuket	53.9	53.9	56.5	55.4	48.9	56.4	56.1	64.8	89.4	99.0	53.7	<b>46.8</b>	47.5
Prachin Buri	68.8	68.9	61.9	97.0	<b>47.0</b>	60.2	97.0	56.5	117.4	77.3	64.4	61.3	56.1
Prachuap Khiri Khan	55.9	56.2	44.6	48.1	<b>37.0</b>	37.9	48.1	39.0	65.5	89.3	58.9	51.8	38.6
Ranong	55.3	55.3	53.4	79.7	51.7	53.9	84.7	52.3	134.3	<b>48.5</b>	50.3	56.2	56.8
Ratchaburi	44.2	44.5	39.8	51.5	<b>33.7</b>	38.3	51.5	37.5	56.6	66.7	44.7	36.9	37.2
Rayong	50.0	50.0	46.6	77.7	<b>37.9</b>	48.6	77.7	47.7	102.3	62.8	44.2	57.9	47.0
Roi Et	55.5	58.2	<b>44.1</b>	106.5	48.1	47.9	106.5	47.1	125.6	73.4	68.4	73.7	56.0
Sa Kaeo	72.1	74.4	67.0	100.9	<b>55.9</b>	65.1	100.9	59.9	111.7	84.5	74.9	77.1	65.7
Sakon Nakhon	67.6	68.3	63.8	132.5	64.7	66.3	132.5	65.3	156.1	74.6	<b>62.3</b>	86.9	73.0
Samut Prakan	61.1	59.4	48.6	65.4	47.9	46.6	65.4	<b>40.7</b>	71.3	90.8	65.0	47.9	42.7
Samut Sakhon	42.9	42.9	34.6	51.3	<b>26.5</b>	34.7	51.3	34.8	63.8	69.5	44.2	33.9	32.9
Samut Songkhram	82.0	81.9	73.5	82.7	73.5	69.8	82.7	65.4	85.7	135.4	93.4	<b>64.9</b>	71.8
Saraburi	66.8	66.6	58.0	87.8	<b>47.1</b>	52.1	87.8	52.5	96.1	65.3	57.9	51.4	47.2
Satun	82.9	82.9	85.4	85.1	80.5	82.9	89.0	89.6	128.8	209.7	109.0	81.0	<b>79.6</b>
Si Sa Ket	58.3	56.8	48.1	98.5	<b>43.0</b>	46.9	98.5	49.9	122.5	89.6	68.2	64.4	47.5
Sing Buri	87.5	87.5	86.8	112.5	85.6	<b>84.5</b>	124.9	87.0	127.2	91.8	93.6	87.7	85.5
Songkhla	63.7	63.1	63.1	67.8	56.6	55.8	67.8	66.9	92.6	84.7	66.6	50.9	<b>50.4</b>
Sukhothai	60.2	60.3	54.4	94.3	55.7	55.4	94.3	55.0	96.6	59.7	56.7	65.3	<b>53.8</b>
Suphan Buri	43.5	43.5	41.1	67.6	36.1	35.9	67.3	40.8	65.2	46.5	41.9	<b>30.4</b>	32.7
Surat Thani	76.7	73.9	67.9	70.9	64.1	60.7	70.9	72.4	89.9	190.0	76.6	77.3	<b>58.2</b>
Surin	60.5	60.4	49.9	103.5	<b>43.3</b>	47.9	103.5	50.3	125.9	63.6	57.6	68.0	45.8
Tak	47.1	47.1	<b>38.3</b>	109.2	43.8	49.1	109.2	39.4	152.3	43.7	50.5	71.5	51.7
Trang	54.7	54.2	46.6	88.1	55.3	50.2	88.1	<b>43.0</b>	120.0	68.9	56.6	63.1	55.6
Trat	57.1	56.6	50.0	86.2	47.3	50.2	86.2	<b>46.4</b>	100.1	86.0	67.4	57.6	52.1
Ubon Ratchathani	69.6	72.0	65.2	112.5	<b>66.0</b>	67.8	112.5	81.4	107.0	83.2	66.0	85.2	69.5
Udon Thani	67.9	76.6	67.2	127.2	<b>51.2</b>	67.1	127.2	69.3	129.6	85.5	52.7	79.6	73.1
Uthai Thani	73.4	73.4	61.1	86.0	60.7	57.5	86.0	<b>56.0</b>	118.5	84.9	77.4	71.6	59.7
Uttaradit	55.3	55.1	52.4	104.4	52.5	55.3	104.4	57.1	130.5	51.0	<b>47.3</b>	61.7	58.7
Yala	58.2	58.7	57.1	80.1	<b>52.2</b>	53.5	80.1	60.6	91.1	79.1	57.3	59.9	55.0
Yasothon	71.8	70.4	54.8	104.8	<b>51.7</b>	56.0	104.8	54.4	120.3	82.4	76.1	90.4	63.4

Table 29: 3-month ahead percent absolute errors in Thailand for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.



### 3.5 PAE of Optimized Models versus Naive Persistence Baseline

country	no. of locations	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
Brazil	27	<b>25</b>	24	24	5	<b>25</b>	<b>25</b>	24	18	2	15	24	24
Colombia	33	26	26	26	0	<b>31</b>	<b>31</b>	25	7	0	7	22	18
Malaysia	15	5	5	5	3	<b>12</b>	7	5	0	0	0	7	8
Mexico	32	22	23	22	13	<b>26</b>	25	21	6	2	4	23	24
Peru	1	<b>1</b>	<b>1</b>	<b>1</b>	0	<b>1</b>	0	<b>1</b>	0	0	<b>1</b>	0	0
Puerto Rico	1	<b>1</b>	<b>1</b>	<b>1</b>	0	<b>1</b>	0	<b>1</b>	<b>1</b>	0	<b>1</b>	0	0
Thailand	77	70	70	74	14	74	75	74	15	3	36	71	69
Overall	186	150	150	153	35	170	163	151	47	7	64	147	143

Table 30: Number of locations per country where optimized models outperformed the naive persistence baseline at the 1-month ahead horizon, as measured through percent absolute error. Best performing models in each location are bolded. Higher values indicate stronger performance.

country	no. of locations	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
Brazil	27	<b>25</b>	<b>25</b>	<b>25</b>	7	24	<b>25</b>	24	18	11	17	24	<b>25</b>
Colombia	33	26	25	23	0	<b>29</b>	<b>29</b>	20	5	1	7	28	22
Malaysia	15	10	10	10	7	<b>12</b>	11	11	0	0	3	10	9
Mexico	32	26	26	26	15	<b>29</b>	27	26	8	12	14	28	27
Peru	1	<b>1</b>	<b>1</b>	<b>1</b>	0	<b>1</b>	0	<b>1</b>	0	<b>1</b>	<b>1</b>	0	0
Puerto Rico	1	0	0	1	0	<b>1</b>	0	<b>1</b>	<b>1</b>	0	<b>1</b>	0	0
Thailand	77	72	72	75	24	75	76	73	13	27	52	74	75
Overall	186	160	159	161	53	171	168	156	45	52	95	164	158

Table 31: Number of locations per country where optimized models outperformed the naive persistence baseline at the 2-month ahead horizon, as measured through percent absolute error. Best performing models in each location are bolded. Higher values indicate stronger performance.

country	no. of locations	AR	ARGO	ARGONet	ETS	Ensemble (Country)	Ensemble (Overall)	NetModel	SIR	Seasonal	StackedML	VAR (Clust., Reg.)	VAR (Reg.)
Brazil	27	<b>25</b>	<b>25</b>	<b>25</b>	9	<b>25</b>	<b>25</b>	24	9	16	20	<b>25</b>	<b>25</b>
Colombia	33	27	28	26	0	29	<b>30</b>	21	3	4	12	29	29
Malaysia	15	10	9	10	11	<b>14</b>	12	11	0	1	9	11	11
Mexico	32	28	29	29	25	<b>30</b>	<b>30</b>	29	8	17	20	28	29
Peru	1	<b>1</b>	<b>1</b>	<b>1</b>	0	<b>1</b>	0	<b>1</b>	0	<b>1</b>	<b>1</b>	0	0
Puerto Rico	1	0	0	0	0	<b>1</b>	0	<b>1</b>	<b>1</b>	<b>1</b>	<b>1</b>	0	0
Thailand	77	73	73	75	41	76	75	72	8	52	64	73	77
Overall	186	164	165	166	86	176	172	159	29	92	127	166	171

Table 32: Number of locations per country where optimized models outperformed the naive persistence baseline at the 3-month ahead horizon, as measured through percent absolute error. Best performing models in each location are bolded. Higher values indicate stronger performance.

### 3.6 Standard Models' PAE by Country

#### 3.6.1 1-Month Ahead

location	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal
Acre	42.5	60.8	60.0	<b>41.2</b>	46.4	42.9	60.1	79.5	98.9
Alagoas	31.9	50.1	42.6	<b>27.9</b>	28.8	38.4	39.8	36.0	121.0
Amapa	109.2	328.8	326.0	45.3	46.9	<b>39.9</b>	326.9	84.8	539.3
Amazonas	44.2	90.0	34.2	25.3	<b>24.3</b>	27.1	29.2	30.5	119.0
Bahia	<b>30.6</b>	38.9	38.9	31.9	33.6	42.1	40.1	33.2	51.4
Ceara	40.3	76.4	51.0	31.2	33.2	35.6	52.3	<b>30.1</b>	90.5
Distrito Federal	36.2	46.5	41.5	37.5	<b>35.6</b>	45.8	36.4	43.7	66.3
Espirito Santo	39.6	47.2	46.4	<b>31.6</b>	35.2	35.4	56.5	39.7	125.7
Goias	26.6	31.5	28.6	<b>25.4</b>	26.8	35.8	31.1	26.9	60.0
Maranhao	58.7	84.2	82.4	<b>37.7</b>	42.7	41.8	76.2	58.6	183.5
Mato Grosso	<b>22.9</b>	35.2	30.6	25.5	28.0	34.1	30.2	53.6	52.5
Mato Grosso do Sul	<b>36.3</b>	64.1	62.4	36.8	43.2	49.9	62.3	67.1	57.0
Minas Gerais	43.9	74.7	67.7	<b>37.5</b>	51.6	50.8	71.8	38.1	87.5
Para	43.5	52.1	50.8	34.2	<b>33.9</b>	35.5	49.7	40.4	132.7
Paraiba	28.4	44.9	39.6	30.1	<b>27.6</b>	37.9	42.6	30.3	75.6
Parana	35.7	42.3	42.5	<b>34.8</b>	42.4	50.7	57.3	36.2	67.2
Pernambuco	<b>28.7</b>	40.5	36.4	28.9	30.8	36.5	36.3	37.9	64.2
Piaui	53.8	74.8	67.7	38.7	37.4	44.6	65.9	<b>34.7</b>	109.2
Rio de Janeiro	129.3	168.0	117.9	<b>36.1</b>	79.9	45.5	116.2	44.0	420.0
Rio Grande do Norte	39.7	64.3	64.2	<b>23.0</b>	34.3	35.0	62.5	35.6	103.5
Rio Grande do Sul	69.9	76.4	78.7	81.3	65.4	77.1	67.0	<b>61.6</b>	71.1
Rondonia	36.7	47.0	42.5	<b>31.1</b>	33.2	31.2	41.6	35.2	144.8
Roraima	46.2	138.8	120.1	<b>27.3</b>	28.4	29.0	119.7	36.7	241.7
Santa Catarina	45.6	38.5	<b>37.1</b>	51.7	41.3	53.5	40.5	49.2	77.3
Sao Paulo	29.7	47.6	46.8	<b>28.0</b>	38.6	45.6	46.6	34.3	44.4
Sergipe	<b>36.1</b>	43.5	43.4	38.1	39.3	42.9	43.9	38.5	69.6
Tocantins	28.7	40.8	39.4	<b>24.6</b>	27.7	38.1	40.4	43.8	89.7

Table 33: 1-month ahead percent absolute errors in Brazil for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal
Amazonas	44.5	62.4	63.5	46.6	<b>38.5</b>	42.8	71.1	60.4	148.3
Antioquia	<b>16.8</b>	30.9	29.1	17.2	19.0	20.5	28.0	20.0	80.8
Arauca	45.1	64.5	48.3	37.5	37.5	<b>33.7</b>	51.9	44.5	126.0
Atlantico	41.7	61.4	45.3	35.4	34.1	44.1	44.2	<b>32.8</b>	103.0
Bogota	252.4	428.2	328.3	107.7	104.8	<b>103.9</b>	337.7	158.3	612.7
Bolivar	31.3	40.0	40.0	29.9	<b>29.6</b>	30.9	40.6	30.1	83.2
Boyaca	38.1	38.0	36.8	<b>33.5</b>	36.4	34.4	38.3	33.7	80.9
Caldas	36.8	38.1	<b>27.8</b>	32.3	31.8	31.2	27.8	35.2	64.0
Caqueta	39.8	46.3	44.3	38.5	38.3	<b>36.5</b>	43.6	46.9	78.6
Casanare	43.3	47.3	45.0	<b>28.5</b>	29.2	29.3	47.0	36.7	116.7
Cauca	26.6	45.7	45.8	24.3	<b>24.1</b>	25.6	45.5	29.0	67.5
Cesar	26.1	40.7	38.9	<b>24.5</b>	25.5	27.4	38.7	29.6	86.4
Choco	<b>29.2</b>	49.9	46.4	30.4	30.0	30.0	37.1	34.3	63.7
Cordoba	36.6	54.5	52.9	32.6	33.0	<b>31.0</b>	52.8	34.8	81.1
Cundinamarca	<b>18.0</b>	24.4	23.0	18.8	20.1	21.1	21.4	26.1	56.5
Guainia	56.3	70.6	64.0	<b>47.6</b>	50.5	54.5	63.7	78.0	97.4
Guajira	45.6	77.1	75.8	41.6	43.6	<b>38.4</b>	75.4	41.0	145.2
Guaviare	44.1	64.8	61.0	44.2	44.6	<b>41.0</b>	62.4	52.4	76.2
Huila	26.8	32.1	28.8	24.6	<b>21.6</b>	23.6	28.2	28.6	67.7
Magdalena	36.8	48.7	38.0	<b>35.8</b>	36.1	37.5	37.9	37.2	103.6
Meta	18.3	27.4	23.5	<b>18.0</b>	18.8	20.7	25.5	21.5	78.8
Naria	34.1	35.6	33.7	33.6	34.5	<b>32.0</b>	32.9	43.7	59.0
Norte Santander	23.1	30.0	30.1	21.1	21.8	<b>20.6</b>	31.4	25.8	77.3
Putumayo	24.3	34.3	21.7	23.1	21.6	24.8	<b>21.1</b>	29.9	56.6
Quindio	20.6	42.1	30.7	18.3	<b>18.3</b>	21.4	37.4	22.0	55.4
Risaralda	31.3	52.3	37.1	26.1	25.8	<b>25.7</b>	41.2	27.9	90.9
San Andres	<b>68.3</b>	80.2	74.6	71.7	73.1	74.1	74.3	156.2	90.8
Santander	15.4	19.4	15.7	<b>13.3</b>	16.5	14.2	16.3	16.4	76.6
Sucre	47.2	68.3	64.7	33.6	33.9	33.2	64.9	<b>33.1</b>	98.3
Tolima	19.3	21.2	19.1	20.1	<b>17.6</b>	19.4	17.8	28.3	46.4
Valle	20.2	25.4	20.4	<b>19.6</b>	19.6	22.5	19.8	28.4	61.7
Vaupes	224.8	340.0	340.0	144.4	154.7	150.0	340.0	<b>133.5</b>	364.0
Vichada	76.2	119.3	119.3	<b>51.9</b>	55.0	54.2	119.3	62.7	117.0

Table 34: 1-month ahead percent absolute errors in Colombia for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal
Johor	25.0	31.4	31.4	<b>19.6</b>	21.3	21.8	31.4	28.4	52.6
Kedah	<b>25.5</b>	27.8	27.8	26.9	26.1	28.2	27.2	36.4	49.9
Kelantan	58.5	85.6	85.6	49.7	45.5	<b>41.8</b>	85.6	51.1	82.8
Kuala Lumpur and Putrajaya	24.4	25.8	25.1	<b>20.8</b>	24.0	23.4	24.5	28.3	58.9
Labuan	67.0	85.5	75.7	61.1	<b>58.7</b>	65.8	72.7	71.9	109.9
Malacca	-	-	-	-	-	<b>21.0</b>	-	-	54.8
Negeri Sembilan	22.7	30.8	31.0	<b>19.1</b>	20.3	20.4	33.1	24.9	47.6
Pahang	25.7	36.5	33.7	<b>19.8</b>	21.7	20.3	33.6	30.0	64.3
Perak	36.0	73.8	70.1	19.6	21.2	<b>19.4</b>	70.0	23.2	103.3
Perlis	51.5	84.5	79.4	47.8	<b>46.0</b>	52.5	79.1	66.6	116.8
Pulau Pinang	-	-	-	-	-	27.4	-	<b>23.5</b>	106.3
Sabah	33.9	35.2	33.5	<b>27.7</b>	32.2	31.6	34.0	53.0	48.7
Sarawak	26.1	51.5	51.8	20.9	22.6	<b>20.6</b>	56.5	27.6	85.0
Selangor	26.8	29.9	28.0	21.8	24.6	<b>20.8</b>	27.9	32.5	57.6
Terengganu	63.1	112.3	112.5	42.6	44.3	<b>39.0</b>	116.8	45.2	172.5

Table 35: 1-month ahead percent absolute errors in Malaysia for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal
Aguascalientes	145.7	181.7	149.2	120.5	105.6	100.8	142.4	<b>74.9</b>	153.9
Baja California Sur	703.2	2081.2	1594.4	88.4	85.9	<b>78.8</b>	1839.6	191.0	2126.3
Baja California	739.6	1836.8	1836.8	139.0	<b>103.4</b>	111.1	1880.2	221.2	1911.7
Campeche	106.3	200.5	162.2	88.5	75.4	<b>74.2</b>	160.8	107.0	418.7
Chiapas	79.7	97.2	95.3	54.6	50.0	<b>49.7</b>	95.2	74.9	139.8
Chihuahua	190.9	148.5	148.5	<b>129.1</b>	137.0	140.7	148.5	623.6	137.3
Coahuila	77.2	117.3	110.4	73.2	<b>72.0</b>	90.6	110.4	77.5	76.8
Colima	77.5	96.4	77.5	<b>54.7</b>	61.0	62.0	80.2	95.1	195.3
Durango	278.8	355.6	355.6	122.0	116.1	<b>98.8</b>	355.6	130.0	282.8
Guanajuato	122.1	321.8	239.5	<b>77.1</b>	89.2	86.4	326.0	148.5	308.3
Guerrero	59.8	103.1	96.6	57.0	<b>54.0</b>	56.0	95.9	120.9	151.6
Hidalgo	93.6	106.6	94.8	<b>73.1</b>	82.3	87.2	96.0	143.5	96.6
Jalisco	62.0	98.8	88.2	<b>45.6</b>	46.4	55.2	74.1	93.0	88.1
Mexico City	-	-	-	-	-	-	-	-	-
Mexico	144.4	154.9	154.9	<b>128.6</b>	134.2	136.3	154.9	291.9	145.6
Michoacan	38.6	55.2	60.0	<b>36.6</b>	40.6	39.2	72.9	67.4	77.9
Morelos	60.7	59.9	67.4	<b>52.0</b>	65.4	61.3	67.1	79.9	62.6
Nayarit	72.7	93.4	72.0	<b>58.1</b>	61.5	64.3	59.8	95.4	95.3
Nuevo Leon	101.7	128.0	125.2	<b>71.7</b>	89.5	87.4	134.0	212.3	122.8
Oaxaca	58.0	75.0	65.5	63.4	<b>53.3</b>	58.7	65.6	105.8	100.4
Puebla	57.8	66.3	69.6	55.0	<b>55.0</b>	58.1	75.3	66.3	78.2
Queretaro	108.1	100.8	98.3	<b>75.0</b>	79.0	76.0	97.9	130.6	110.4
Quintana Roo	52.0	62.7	65.3	43.9	42.4	<b>41.6</b>	91.0	46.1	142.1
San Luis Potosi	75.7	83.5	<b>71.3</b>	75.9	75.5	78.7	73.4	157.9	90.4
Sinaloa	66.2	89.4	89.7	55.6	59.4	63.7	102.9	<b>45.3</b>	89.0
Sonora	264.1	280.8	339.3	90.6	145.8	<b>72.5</b>	457.7	123.7	507.9
Tabasco	68.4	106.4	106.4	63.0	58.4	<b>54.2</b>	107.0	66.4	233.6
Tamaulipas	70.9	133.6	125.7	57.1	<b>55.8</b>	62.8	133.1	96.1	147.1
Tlaxcala	-	-	-	-	-	-	-	-	-
Veracruz	67.9	81.2	78.5	<b>51.1</b>	51.3	52.0	75.9	53.1	104.6
Yucatan	98.5	165.5	162.1	<b>51.1</b>	52.4	53.2	178.6	100.3	285.2
Zacatecas	200.3	205.9	205.9	132.0	143.7	<b>107.8</b>	205.9	269.2	192.2

Table 36: 1-month ahead percent absolute errors in Mexico for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal
Iquitos	-	-	-	<b>63.8</b>	-	79.2	-	204.6	80.6

Table 37: 1-month ahead percent absolute errors in Peru for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal
San Juan	23.8	34.5	34.2	<b>20.1</b>	23.0	30.7	36.8	22.9	60.7

Table 38: 1-month ahead percent absolute errors in Puerto Rico for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal
Amnat Charoen	58.3	65.2	57.0	<b>49.3</b>	53.5	56.6	56.0	76.7	99.2
Ang Thong	53.9	63.0	57.0	55.4	54.0	<b>53.3</b>	56.3	56.9	80.5
Bangkok	43.0	87.6	77.3	46.1	40.8	<b>35.7</b>	76.8	39.5	73.4
Bungkan	95.9	99.9	105.7	86.8	96.2	<b>80.4</b>	106.6	142.4	87.0
Buri Ram	47.9	50.2	37.9	34.5	<b>33.7</b>	45.8	34.9	58.1	79.1
Chachoengsao	48.1	54.8	54.1	28.5	<b>28.3</b>	31.5	61.4	32.7	146.7
Chai Nat	48.5	55.5	45.8	46.8	44.5	49.0	<b>42.5</b>	61.9	76.7
Chaiyaphum	<b>40.7</b>	49.5	48.8	42.4	43.1	43.6	51.1	42.3	89.3
Chanthaburi	40.5	47.6	40.3	<b>28.1</b>	32.9	43.3	42.4	43.7	83.2
Chiang Mai	39.5	51.0	30.3	21.5	<b>18.8</b>	45.1	46.6	59.9	68.5
Chiang Rai	62.0	53.2	45.0	40.6	37.1	49.6	<b>36.3</b>	86.2	76.9
Chon Buri	31.6	32.4	32.2	<b>30.3</b>	31.9	33.5	31.7	40.2	67.9
Chumphon	41.6	56.6	44.9	<b>34.3</b>	40.7	39.3	43.5	43.6	85.9
Kalasin	42.7	57.1	38.1	<b>31.3</b>	35.8	46.8	37.2	53.2	69.9
Kamphaeng Phet	63.3	66.8	59.9	48.0	46.8	<b>42.6</b>	51.3	47.9	132.2
Kanchanaburi	49.0	52.9	41.4	45.6	40.2	44.8	<b>37.6</b>	55.4	91.7
Khon Kaen	45.8	44.0	46.6	40.9	40.8	<b>40.4</b>	51.0	60.2	83.8
Krabi	48.7	57.4	49.8	31.9	32.6	<b>31.5</b>	50.5	38.9	178.0
Lampang	59.1	70.8	61.2	<b>38.7</b>	52.1	63.2	57.5	83.7	68.3
Lamphun	74.9	111.0	65.1	53.7	<b>53.2</b>	59.1	79.6	87.5	136.3
Loei	52.6	53.8	49.4	<b>41.5</b>	46.3	52.3	49.6	49.9	80.0
Lop Buri	48.0	51.1	42.4	42.3	42.7	<b>41.6</b>	45.8	57.7	72.6
Mae Hong Son	52.3	53.7	<b>51.7</b>	59.2	53.9	62.0	59.6	90.4	63.9
Maha Sarakham	<b>41.9</b>	52.9	47.5	43.8	46.3	47.3	43.7	61.8	81.4
Mukdahan	55.1	70.2	68.5	<b>51.7</b>	52.9	57.9	68.7	66.4	78.1
Nakhon Nayok	71.6	86.7	67.4	59.4	57.7	<b>55.4</b>	74.3	77.9	124.5
Nakhon Pathom	17.7	25.0	23.4	<b>17.5</b>	19.5	28.6	22.5	23.1	58.3
Nakhon Phanom	61.2	69.4	70.7	<b>52.6</b>	58.9	65.4	73.3	63.0	71.1
Nakhon Ratchasima	45.7	43.5	46.7	<b>37.3</b>	40.9	45.7	42.2	53.1	82.8
Nakhon Sawan	32.8	43.5	38.7	29.8	<b>29.6</b>	31.2	37.9	51.2	74.7
Nakhon Si Thammarat	30.2	45.8	35.3	25.6	25.3	<b>25.1</b>	34.3	31.0	87.2
Nan	55.9	55.7	48.0	52.1	50.3	57.0	<b>45.8</b>	102.5	56.2
Narathiwat	44.4	44.0	36.7	<b>31.2</b>	38.0	38.6	33.6	52.9	94.5
Nong Bua Lam Phu	64.0	72.5	57.1	55.0	53.7	58.9	<b>53.4</b>	63.9	82.8
Nong Khai	54.2	72.1	59.0	43.3	<b>42.4</b>	53.1	55.3	61.6	79.2
Nonthaburi	40.0	67.2	69.1	31.4	35.4	35.4	77.7	<b>30.1</b>	99.5
P.Nakhon S.Ayutthaya	40.5	52.6	53.3	<b>29.9</b>	31.8	37.1	53.6	41.6	85.3
Pathum Thani	51.8	71.5	71.9	47.3	40.0	<b>39.9</b>	75.9	44.2	127.9
Pattani	37.2	50.6	47.7	<b>27.1</b>	34.0	34.7	44.0	40.7	84.4
Phangnga	43.6	58.2	50.8	<b>33.0</b>	36.5	39.3	51.3	48.0	62.5
Phatthalung	60.0	77.4	77.9	<b>42.6</b>	44.6	47.2	77.8	64.7	135.7
Phayao	79.2	105.0	87.3	60.0	<b>55.9</b>	69.7	59.8	78.4	82.7
Phetchabun	52.6	53.3	<b>30.8</b>	30.8	33.1	51.2	31.0	59.9	77.6
Phetchaburi	41.8	42.4	40.1	33.0	33.1	<b>29.8</b>	46.8	35.1	94.9
Phichit	58.3	67.3	63.5	<b>50.9</b>	59.9	52.7	67.4	63.2	163.0
Phitsanulok	41.9	47.6	40.9	40.6	<b>36.7</b>	40.9	49.2	49.7	74.8
Phrae	85.1	93.5	72.9	<b>49.3</b>	53.9	68.2	69.4	100.5	139.2
Phuket	43.9	56.3	56.1	<b>29.9</b>	33.8	34.9	61.4	39.0	110.5
Prachin Buri	40.6	42.0	26.1	<b>23.2</b>	31.0	41.2	25.9	36.0	76.3
Prachuap Khiri Khan	40.8	45.2	42.4	<b>29.2</b>	35.3	32.2	42.9	35.3	83.2
Ranong	49.2	56.9	57.4	<b>41.5</b>	52.8	45.3	57.9	58.5	48.3
Ratchaburi	29.6	35.8	32.0	29.1	27.4	<b>27.1</b>	32.3	29.9	68.3
Rayong	36.0	40.1	34.3	31.0	<b>29.2</b>	38.0	29.5	40.4	67.2
Roi Et	37.6	39.9	29.9	<b>27.7</b>	31.0	44.5	31.6	65.1	74.8
Sa Kaeo	39.0	44.3	34.8	34.1	<b>32.6</b>	42.4	35.3	38.5	83.7
Sakon Nakhon	58.4	70.0	71.5	<b>47.2</b>	57.4	64.1	79.7	88.4	74.7
Samut Prakan	38.8	45.7	47.6	<b>25.6</b>	31.8	30.3	58.4	37.1	95.3
Samut Sakhon	38.6	44.2	43.8	<b>25.6</b>	28.5	28.9	45.9	39.2	73.0
Samut Songkhram	54.5	73.1	61.1	40.4	<b>39.2</b>	40.5	58.7	40.1	137.8
Saraburi	<b>33.1</b>	47.0	33.8	33.5	34.2	37.5	33.4	45.4	66.0
Satun	100.0	157.5	136.2	<b>70.8</b>	77.2	73.3	136.1	99.9	226.0
Si Sa Ket	42.1	48.6	29.5	26.7	27.8	42.8	<b>26.4</b>	56.9	85.2
Sing Buri	104.7	108.8	102.7	92.2	86.0	<b>85.0</b>	103.5	166.4	95.3
Songkhla	33.7	39.3	35.2	<b>29.8</b>	31.6	31.2	33.2	38.6	95.4
Sukhothai	38.6	44.3	36.6	39.8	38.4	43.5	<b>35.6</b>	43.6	56.3
Suphan Buri	27.3	31.2	24.9	28.0	23.5	31.6	<b>23.0</b>	34.4	45.1
Surat Thani	58.9	69.1	71.1	38.5	41.0	<b>37.4</b>	92.8	39.3	184.0
Surin	33.1	38.1	25.6	28.3	28.7	40.4	<b>24.4</b>	63.5	65.5
Tak	48.5	47.5	44.1	<b>35.3</b>	38.3	51.1	37.0	59.6	41.8
Trang	42.1	59.0	53.3	<b>33.2</b>	37.5	41.8	53.5	48.9	68.3
Trat	56.4	64.2	63.6	<b>43.2</b>	45.2	43.4	67.3	50.4	95.3
Ubon Ratchathani	50.8	51.8	47.9	<b>38.6</b>	43.1	50.7	56.1	48.3	81.3
Udon Thani	72.9	64.5	49.4	46.2	<b>42.8</b>	67.3	46.9	141.4	87.2
Uthai Thani	53.9	54.1	48.8	44.6	47.7	48.0	<b>43.8</b>	74.7	81.6
Uttaradit	51.8	51.5	53.4	52.3	<b>48.2</b>	55.3	56.2	77.6	49.3
Yala	35.0	40.9	35.3	34.1	<b>29.5</b>	34.5	34.5	41.9	77.8
Yasothon	45.4	57.4	38.0	35.9	44.6	47.1	<b>35.6</b>	64.6	79.1

Table 39: 1-month ahead percent absolute errors in Thailand for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

### 3.6.2 2-Month Ahead

location	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal
Acre	69.6	97.4	97.3	<b>67.4</b>	68.1	76.8	97.0	211.7	96.5
Alagoas	67.3	85.4	65.5	56.5	69.5	73.2	<b>53.5</b>	100.1	119.7
Amapa	179.0	475.6	394.2	68.7	108.2	<b>58.5</b>	390.4	187.1	540.8
Amazonas	75.5	104.6	82.0	<b>42.5</b>	61.7	44.4	76.9	57.7	116.4
Bahia	<b>51.2</b>	69.8	58.2	64.8	54.6	73.4	57.5	80.8	51.4
Ceara	78.8	93.7	73.4	63.3	57.1	65.6	<b>56.1</b>	82.0	90.7
Distrito Federal	<b>64.5</b>	85.6	73.2	81.8	64.7	79.6	66.0	97.5	66.2
Espirito Santo	78.3	92.9	91.5	<b>59.7</b>	80.8	64.8	103.8	68.8	123.6
Goias	49.3	50.0	45.0	59.2	<b>39.3</b>	63.6	65.7	53.1	57.8
Maranhao	125.1	163.9	149.0	75.3	100.5	<b>72.6</b>	141.1	229.6	180.4
Mato Grosso	<b>41.8</b>	58.1	48.2	52.9	47.1	62.1	49.3	152.8	52.7
Mato Grosso do Sul	66.2	89.4	90.3	79.1	56.5	92.1	86.7	256.9	<b>56.0</b>
Minas Gerais	89.5	108.8	92.4	96.9	<b>80.0</b>	99.1	87.5	101.7	86.9
Para	75.7	91.1	66.9	68.6	70.3	<b>59.0</b>	61.9	92.0	127.6
Paraiba	<b>44.5</b>	72.2	64.7	44.9	48.0	61.2	58.3	67.7	75.0
Parana	62.9	80.9	85.2	63.2	<b>56.9</b>	96.3	88.6	121.7	67.0
Pernambuco	49.0	61.2	66.7	51.4	<b>40.7</b>	63.2	68.5	93.4	64.5
Piaui	108.0	132.2	56.9	69.1	63.0	73.7	<b>48.1</b>	78.2	104.9
Rio de Janeiro	300.1	420.8	284.1	88.2	213.8	<b>81.6</b>	212.9	104.0	410.4
Rio Grande do Norte	84.8	110.4	105.8	<b>51.6</b>	74.3	61.5	105.7	90.8	103.9
Rio Grande do Sul	89.8	77.4	81.0	116.7	103.2	117.5	83.7	202.2	<b>71.0</b>
Rondonia	59.4	82.3	80.6	43.9	<b>40.6</b>	53.3	81.2	61.2	139.7
Roraima	69.4	119.8	119.1	<b>38.7</b>	76.0	42.2	126.1	56.1	228.3
Santa Catarina	74.5	<b>71.0</b>	73.1	73.0	75.4	100.5	73.7	168.5	77.1
Sao Paulo	60.3	80.5	80.0	73.0	54.6	85.6	78.8	94.3	<b>44.0</b>
Sergipe	62.7	66.7	66.3	67.8	<b>59.5</b>	70.2	63.9	88.6	69.2
Tocantins	56.4	76.4	69.1	<b>46.4</b>	62.5	68.9	66.8	113.8	87.1

Table 40: 2-month ahead percent absolute errors in Brazil for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal
Amazonas	67.3	105.8	88.1	56.3	76.4	<b>55.0</b>	78.2	68.1	119.2
Antioquia	<b>31.5</b>	53.0	40.6	31.8	37.7	37.5	40.2	32.8	76.3
Arauca	69.2	87.2	56.5	55.5	67.3	<b>46.4</b>	62.8	71.0	128.5
Atlantico	80.8	93.4	70.6	68.0	<b>60.8</b>	74.4	66.9	68.5	90.7
Bogota	214.3	367.9	257.3	<b>87.0</b>	142.7	96.1	235.2	163.8	431.6
Bolivar	54.4	61.3	59.0	51.4	51.0	<b>50.9</b>	59.8	60.7	79.2
Boyaca	50.3	53.6	50.2	48.7	49.4	<b>45.9</b>	53.9	54.7	78.0
Caldas	46.1	52.5	<b>34.8</b>	41.2	38.5	39.6	35.7	45.9	59.9
Caqueta	58.9	69.1	49.5	60.2	59.5	59.4	<b>43.4</b>	83.1	75.8
Casanare	85.2	92.7	77.3	<b>44.2</b>	47.3	46.6	70.3	64.4	134.3
Cauca	43.3	63.6	56.2	42.2	<b>38.6</b>	39.8	53.9	55.4	65.9
Cesar	50.8	68.7	59.1	47.8	47.1	<b>44.7</b>	58.5	57.8	84.6
Choco	47.4	62.2	52.1	45.6	45.0	<b>42.3</b>	52.9	52.1	61.5
Cordoba	65.8	71.5	64.0	54.0	47.1	49.2	65.2	<b>46.2</b>	77.7
Cundinamarca	31.7	33.8	40.3	32.2	<b>30.9</b>	35.7	33.5	42.6	50.0
Guainia	87.5	110.5	85.1	74.9	<b>72.5</b>	82.7	83.9	226.6	97.6
Guajira	69.8	98.9	81.7	63.8	65.2	<b>58.4</b>	74.9	67.9	129.4
Guaviare	59.7	75.1	<b>52.3</b>	60.4	57.1	59.3	56.0	70.8	73.3
Huila	46.0	52.4	47.8	39.7	<b>39.6</b>	40.0	43.8	55.1	66.4
Magdalena	67.9	79.7	72.3	<b>58.4</b>	66.6	62.0	70.8	66.1	103.3
Meta	36.6	53.4	43.0	35.3	35.5	<b>34.6</b>	44.3	38.7	75.7
Naria	42.6	42.9	35.4	41.2	40.7	40.9	<b>32.8</b>	58.4	58.9
Norte Santander	37.7	46.9	41.4	33.6	<b>31.7</b>	32.1	45.8	44.1	71.8
Putumayo	47.9	61.4	40.2	40.0	41.5	43.1	<b>33.5</b>	52.9	58.1
Quindio	37.8	63.8	40.2	31.1	<b>27.4</b>	35.2	36.2	38.9	53.2
Risaralda	50.5	86.7	53.9	43.5	44.4	<b>42.8</b>	45.9	46.7	86.0
San Andres	85.4	92.1	92.8	<b>77.1</b>	88.1	110.4	91.0	666.6	90.8
Santander	27.2	31.8	<b>18.9</b>	22.2	29.4	22.3	22.4	25.7	72.6
Sucre	72.8	80.6	58.6	53.2	51.2	51.4	67.1	<b>47.9</b>	82.5
Tolima	30.6	31.2	32.8	30.2	29.3	30.8	<b>27.0</b>	50.3	41.7
Valle	35.9	41.0	37.8	37.4	36.5	37.6	<b>35.1</b>	59.7	61.8
Vaupes	298.9	363.1	363.1	165.1	171.0	<b>141.7</b>	363.1	168.0	381.9
Vichada	104.8	111.8	96.4	<b>65.5</b>	75.8	66.8	116.2	99.7	109.9

Table 41: 2-month ahead percent absolute errors in Colombia for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal
Johor	40.5	42.6	42.5	40.4	43.1	<b>38.0</b>	42.4	51.7	53.1
Kedah	<b>37.0</b>	40.5	38.5	40.5	40.3	42.3	38.7	60.6	53.9
Kelantan	77.9	85.6	85.6	57.0	<b>47.0</b>	62.6	85.6	94.3	82.2
Kuala Lumpur and Putrajaya	39.6	38.2	35.6	38.5	<b>33.3</b>	35.8	33.9	51.0	59.1
Labuan	97.0	145.6	131.2	<b>83.8</b>	95.6	84.8	122.1	146.4	151.3
Malacca	-	-	-	-	-	<b>34.6</b>	-	-	56.8
Negeri Sembilan	31.8	38.4	37.9	31.4	30.4	<b>30.0</b>	36.3	38.2	48.4
Pahang	37.0	48.4	47.0	38.0	40.4	<b>35.9</b>	47.6	54.3	62.7
Perak	45.9	77.0	77.2	31.5	33.1	<b>29.1</b>	81.8	39.5	95.1
Perlis	78.3	115.5	115.6	69.4	71.6	<b>65.7</b>	116.2	108.1	122.4
Pulau Pinang	-	-	-	-	-	<b>35.5</b>	-	38.7	95.0
Sabah	40.1	40.3	37.0	41.7	37.9	42.6	<b>35.4</b>	83.4	48.8
Sarawak	38.1	55.7	56.3	30.2	34.6	<b>27.3</b>	59.2	44.5	81.7
Selangor	34.7	36.4	36.4	<b>32.5</b>	35.4	34.0	36.5	50.4	57.5
Terengganu	103.9	168.6	168.4	50.3	53.4	<b>47.1</b>	168.4	57.3	171.2

Table 42: 2-month ahead percent absolute errors in Malaysia for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal
Aguascalientes	182.6	184.8	184.8	<b>100.9</b>	<b>100.9</b>	169.7	184.8	142.4	153.9
Baja California Sur	1630.5	2262.8	2000.3	150.4	150.4	<b>135.3</b>	2092.4	928.8	2255.8
Baja California	1705.8	2148.1	2162.0	177.5	177.5	<b>144.4</b>	1878.8	225.1	2130.2
Campeche	150.2	263.0	193.5	109.6	109.6	<b>75.2</b>	183.0	192.5	421.1
Chiapas	107.9	127.2	111.6	<b>47.6</b>	<b>47.6</b>	70.3	104.4	135.7	128.0
Chihuahua	183.1	161.1	161.1	<b>122.2</b>	<b>122.2</b>	185.4	161.1	4778.4	146.6
Coahuila	117.7	120.5	117.0	86.5	86.5	143.6	113.7	208.3	<b>76.5</b>
Colima	112.5	148.3	128.8	90.1	90.1	<b>89.1</b>	118.7	224.7	194.5
Durango	404.6	407.4	407.4	<b>146.0</b>	<b>146.0</b>	188.2	407.4	230.1	317.5
Guanajuato	435.9	639.9	639.9	<b>200.1</b>	<b>200.1</b>	267.3	639.9	1000.9	539.7
Guerrero	85.2	127.9	84.3	82.4	82.4	<b>76.9</b>	87.8	259.2	143.7
Hidalgo	107.4	110.3	110.7	101.3	101.3	128.2	110.7	437.5	<b>96.4</b>
Jalisco	<b>83.7</b>	104.8	93.1	83.9	83.9	102.2	90.7	259.7	87.3
Mexico City	-	-	-	-	-	-	-	-	-
Mexico	149.6	149.6	149.6	<b>122.4</b>	<b>122.4</b>	159.4	149.6	732.3	138.7
Michoacan	<b>67.7</b>	85.2	80.6	68.4	68.4	71.0	78.6	198.0	75.6
Morelos	90.2	82.5	-	80.9	80.9	95.8	82.5	157.9	<b>61.8</b>
Nayarit	102.0	112.1	80.5	<b>72.2</b>	<b>72.2</b>	90.0	74.4	213.8	95.0
Nuevo Leon	154.4	165.5	148.7	<b>102.2</b>	<b>102.2</b>	143.3	145.8	1032.6	128.1
Oaxaca	84.0	133.4	106.9	<b>64.2</b>	<b>64.2</b>	92.9	87.4	310.1	96.2
Puebla	90.7	106.3	-	97.3	97.3	110.5	104.3	201.6	<b>79.4</b>
Queretaro	182.5	118.2	118.2	<b>100.5</b>	<b>100.5</b>	107.5	118.2	214.1	114.3
Quintana Roo	74.8	94.3	81.9	<b>63.3</b>	<b>63.3</b>	64.4	77.7	84.7	135.9
San Luis Potosi	100.6	99.6	102.3	111.4	111.4	106.7	98.5	671.9	<b>92.4</b>
Sinaloa	108.8	139.7	137.8	<b>82.3</b>	<b>82.3</b>	93.4	139.8	230.8	87.9
Sonora	488.8	552.5	552.5	<b>123.5</b>	<b>123.5</b>	137.3	552.5	540.3	505.9
Tabasco	97.4	135.5	-	98.9	98.9	<b>74.2</b>	139.3	173.0	234.2
Tamaulipas	125.6	164.2	152.5	<b>90.1</b>	<b>90.1</b>	112.4	151.2	357.9	144.6
Tlaxcala	-	-	-	-	-	-	-	-	-
Veracruz	88.1	107.9	71.9	69.0	69.0	80.5	<b>62.6</b>	113.0	106.4
Yucatan	179.9	262.2	209.0	88.1	88.1	<b>86.9</b>	201.6	427.9	286.4
Zacatecas	214.8	207.3	207.3	<b>149.8</b>	<b>149.8</b>	192.9	207.3	1048.1	190.9

Table 43: 2-month ahead percent absolute errors in Mexico for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal
Iquitos	114.2	110.4	110.4	<b>52.0</b>	67.9	101.3	110.4	772.8	80.6

Table 44: 2-month ahead percent absolute errors in Peru for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal
San Juan	53.0	71.3	71.3	<b>38.7</b>	51.3	55.1	68.5	51.3	60.6

Table 45: 2-month ahead percent absolute errors in Puerto Rico for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.



location	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal
Amnat Charoen	99.7	109.0	103.2	<b>69.8</b>	81.2	87.7	113.7	174.8	99.7
Ang Thong	75.9	77.3	73.8	<b>61.7</b>	68.8	74.8	72.0	117.1	78.5
Bangkok	66.8	91.5	82.8	<b>52.5</b>	67.7	60.0	74.4	74.9	76.2
Bungkan	114.2	118.2	117.0	<b>73.4</b>	85.0	118.8	115.7	515.8	89.0
Buri Ram	72.0	77.7	64.5	53.0	<b>51.9</b>	72.1	59.3	126.5	81.5
Chachoengsao	86.7	96.6	92.5	<b>44.4</b>	46.4	54.0	82.2	53.1	140.9
Chai Nat	72.5	75.6	60.9	88.3	85.8	76.2	<b>58.1</b>	125.9	73.0
Chaiyaphum	79.2	<b>76.9</b>	82.6	77.9	85.1	78.3	80.4	90.6	88.5
Chanthaburi	74.2	83.3	69.8	<b>50.7</b>	56.1	79.3	69.4	124.1	81.2
Chiang Mai	78.8	115.2	54.9	56.3	57.1	87.0	<b>50.3</b>	210.2	68.9
Chiang Rai	84.2	103.3	56.7	62.3	60.0	93.2	<b>50.0</b>	299.2	77.2
Chon Buri	50.1	50.3	49.9	47.4	48.5	53.9	<b>46.0</b>	71.3	66.7
Chumphon	63.2	65.2	62.7	45.4	<b>42.8</b>	52.4	60.1	63.3	80.2
Kalasin	65.3	85.1	63.2	<b>51.7</b>	60.7	74.0	59.4	122.8	71.9
Kamphaeng Phet	121.3	132.0	93.3	<b>66.1</b>	69.7	72.5	89.6	93.1	141.6
Kanchanaburi	79.3	77.9	65.6	60.6	65.7	70.2	<b>57.9</b>	117.3	86.8
Khon Kaen	64.2	82.3	72.5	71.1	64.4	<b>62.2</b>	72.5	105.5	86.0
Krabi	115.3	118.3	95.1	55.9	55.2	<b>50.0</b>	99.2	67.7	198.3
Lampang	98.5	124.4	93.6	51.3	<b>50.5</b>	107.4	84.7	180.7	69.3
Lamphun	120.9	152.9	143.2	68.0	<b>60.6</b>	90.1	118.6	266.9	130.4
Loei	83.4	85.3	81.2	<b>58.4</b>	60.6	98.2	77.3	144.1	79.1
Lop Buri	74.9	81.6	68.9	<b>56.5</b>	56.9	66.9	66.9	103.8	73.8
Mae Hong Son	82.0	88.4	87.1	<b>64.1</b>	73.9	107.8	80.9	307.3	64.2
Maha Sarakham	71.3	86.4	56.0	85.8	77.8	79.6	<b>52.1</b>	116.5	80.6
Mukdahan	72.7	106.1	101.0	<b>62.3</b>	67.2	94.9	94.3	172.4	79.3
Nakhon Nayok	128.0	141.4	152.4	<b>86.0</b>	89.9	95.6	148.2	140.1	138.0
Nakhon Pathom	31.4	43.3	32.0	38.8	35.6	49.4	<b>30.0</b>	42.3	54.5
Nakhon Phanom	95.8	105.3	103.8	<b>57.0</b>	60.4	110.8	98.0	261.5	71.0
Nakhon Ratchasima	71.3	72.8	62.9	62.4	62.7	72.8	<b>60.5</b>	121.4	81.5
Nakhon Sawan	59.5	68.5	60.9	<b>44.7</b>	46.9	55.9	59.1	142.4	76.2
Nakhon Si Thammarat	51.7	76.9	39.5	40.4	41.1	40.5	<b>34.4</b>	51.7	86.5
Nan	80.8	97.0	85.2	75.7	75.9	87.9	72.0	322.3	<b>64.5</b>
Narathiwat	71.1	76.3	52.7	56.9	62.4	60.3	<b>39.5</b>	109.1	89.3
Nong Bua Lam Phu	89.0	96.8	76.8	<b>48.5</b>	54.3	90.4	81.8	145.8	78.8
Nong Khai	79.2	106.8	89.4	<b>55.8</b>	60.6	84.3	81.1	134.8	79.4
Nonthaburi	72.5	94.5	84.3	<b>58.8</b>	66.0	66.7	76.6	62.9	92.4
P.Nakhon S.Ayutthaya	59.9	69.1	61.1	<b>42.9</b>	43.9	58.2	63.0	71.1	77.7
Pathum Thani	72.6	83.4	81.5	<b>55.0</b>	59.2	59.2	91.0	56.0	121.0
Pattani	62.9	77.4	87.5	<b>49.5</b>	50.2	55.5	90.0	82.3	84.8
Phangnga	68.7	80.7	67.9	<b>43.4</b>	46.4	60.7	62.0	88.0	62.6
Phatthalung	84.4	109.2	94.0	<b>51.6</b>	56.8	57.0	87.5	99.6	128.3
Phayao	115.4	133.6	98.9	<b>61.7</b>	70.6	107.7	81.1	230.7	79.6
Phetchabun	82.7	107.2	87.3	<b>51.7</b>	65.8	88.4	87.0	156.6	76.3
Phetchaburi	65.8	68.3	73.1	45.0	49.3	<b>40.7</b>	83.8	56.6	100.9
Phichit	115.2	130.7	128.7	95.9	94.7	<b>84.5</b>	109.5	105.3	167.8
Phitsanulok	68.3	82.9	70.5	47.9	<b>46.1</b>	72.8	77.2	98.3	75.2
Phrae	166.8	187.2	136.0	85.8	<b>71.6</b>	120.3	130.4	468.6	141.9
Phuket	71.8	86.7	66.3	<b>45.5</b>	59.1	51.6	73.5	70.8	113.1
Prachin Buri	71.0	73.7	47.3	59.6	50.0	73.5	<b>42.1</b>	96.8	76.7
Prachuap Khiri Khan	63.5	58.9	57.1	44.1	<b>39.7</b>	46.8	60.3	54.0	81.7
Ranong	63.8	65.6	67.5	<b>47.0</b>	58.1	68.3	66.3	101.9	49.4
Ratchaburi	43.8	49.7	52.1	<b>35.3</b>	36.8	40.3	56.6	42.5	66.7
Rayong	61.3	61.9	51.1	<b>47.0</b>	49.6	61.1	47.8	85.2	63.0
Roi Et	66.5	66.9	49.9	60.1	52.5	80.5	<b>46.0</b>	164.3	73.2
Sa Kaeo	65.3	73.5	57.5	72.8	66.6	73.8	<b>54.1</b>	89.3	84.2
Sakon Nakhon	91.6	106.8	105.0	<b>58.7</b>	65.6	108.4	103.0	213.3	73.6
Samut Prakan	64.8	67.6	73.8	51.3	<b>46.0</b>	52.8	73.9	72.2	92.3
Samut Sakhon	54.7	61.6	40.1	33.9	<b>32.8</b>	41.5	38.8	50.6	68.8
Samut Songkhram	92.4	118.5	87.2	76.1	71.8	<b>67.7</b>	72.5	72.5	140.6
Saraburi	56.3	71.5	52.0	51.9	55.5	66.8	<b>41.5</b>	89.3	65.5
Satun	129.1	229.1	143.5	84.7	<b>72.1</b>	87.4	135.9	145.5	222.3
Si Sa Ket	75.6	89.4	82.8	49.7	<b>47.8</b>	74.4	69.1	134.2	87.9
Sing Buri	124.1	93.8	<b>89.0</b>	117.9	113.5	118.7	91.8	521.7	91.8
Songkhla	59.6	73.9	58.8	<b>40.9</b>	45.7	53.0	59.7	73.9	86.8
Sukhothai	57.9	68.5	60.6	<b>55.3</b>	57.8	73.4	56.9	104.2	58.5
Suphan Buri	39.1	44.5	41.4	40.9	42.0	52.3	<b>37.7</b>	63.1	46.7
Surat Thani	110.1	136.4	117.9	72.8	62.4	<b>59.2</b>	115.9	70.0	186.7
Surin	60.8	78.0	57.6	55.9	55.9	74.3	<b>45.4</b>	151.6	64.2
Tak	65.5	75.1	69.1	46.1	56.9	84.1	57.0	162.6	<b>43.0</b>
Trang	73.3	92.5	79.9	45.0	<b>43.2</b>	69.4	76.5	116.0	69.9
Trat	82.1	84.2	107.3	<b>51.3</b>	56.6	73.9	104.2	100.0	88.8
Ubon Ratchathani	67.5	84.2	68.5	<b>70.7</b>	<b>51.8</b>	85.7	68.9	119.6	81.7
Udon Thani	93.4	93.7	82.0	79.3	<b>67.4</b>	104.7	76.3	638.0	85.7
Uthai Thani	79.1	75.8	84.0	<b>67.7</b>	74.0	74.2	74.3	144.2	86.6
Uttaradit	65.0	65.9	70.4	<b>46.6</b>	52.1	83.0	64.4	160.5	50.3
Yala	58.1	61.3	65.4	<b>48.7</b>	51.1	62.4	64.6	87.7	79.0
Yasothon	73.0	100.3	73.1	<b>55.0</b>	59.6	78.3	58.9	132.1	81.1

Table 46: 2-month ahead percent absolute errors in Thailand for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

### 3.6.3 3-Month Ahead

location	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal
Acre	94.3	98.1	98.1	89.5	<b>86.0</b>	104.1	98.1	547.2	97.0
Alagoas	93.7	108.0	69.2	92.1	85.7	101.3	<b>63.2</b>	230.5	119.1
Amapa	261.0	506.7	508.2	71.6	81.7	<b>68.6</b>	503.3	239.1	544.3
Amazonas	100.9	106.4	106.4	77.5	69.1	<b>60.6</b>	106.4	104.8	116.9
Bahia	60.6	72.0	68.8	59.3	65.9	97.8	69.1	151.0	<b>51.4</b>
Ceara	107.0	94.3	82.3	62.9	<b>62.1</b>	91.2	66.2	172.8	90.2
Distrito Federal	73.0	73.6	75.8	77.0	83.0	108.8	76.1	205.1	<b>66.2</b>
Espirito Santo	107.8	129.7	129.8	97.0	99.8	<b>87.4</b>	127.3	120.6	122.1
Goiias	66.0	68.6	65.1	<b>43.2</b>	45.9	88.3	82.1	92.1	58.1
Maranhao	184.8	190.8	178.4	110.9	110.0	<b>95.7</b>	192.3	1043.6	178.7
Mato Grosso	51.4	62.7	64.3	49.9	<b>46.6</b>	86.8	62.8	389.5	52.9
Mato Grosso do Sul	78.8	89.3	89.3	71.5	72.3	123.1	89.3	785.8	<b>55.6</b>
Minas Gerais	100.9	108.3	114.1	90.5	88.9	128.7	110.4	196.9	<b>86.9</b>
Para	101.5	109.1	94.3	81.5	<b>67.6</b>	77.7	90.6	160.9	125.2
Paraiba	59.2	72.4	74.8	<b>57.2</b>	62.6	82.9	73.5	135.0	74.6
Parana	72.5	82.6	83.8	79.2	80.5	120.0	81.4	303.8	<b>67.0</b>
Pernambuco	58.8	60.6	61.8	<b>54.5</b>	55.9	82.2	79.7	182.0	64.3
Piaui	147.2	132.2	91.2	83.0	<b>72.2</b>	101.5	84.1	160.9	104.8
Rio de Janeiro	438.4	431.0	301.3	190.4	191.5	<b>102.2</b>	244.7	219.4	415.6
Rio Grande do Norte	112.3	114.6	105.5	<b>73.2</b>	83.2	81.8	105.5	175.9	106.8
Rio Grande do Sul	83.9	84.5	84.5	100.9	103.7	148.0	86.9	623.9	<b>71.0</b>
Rondonia	80.3	85.0	98.8	<b>59.6</b>	75.0	71.9	106.8	105.2	140.3
Roraima	85.3	124.5	163.2	68.4	90.0	<b>55.7</b>	198.9	74.2	229.7
Santa Catarina	82.0	76.5	76.4	84.8	85.8	122.2	<b>75.7</b>	336.2	77.0
Sao Paulo	68.3	80.8	80.8	56.7	62.7	113.2	80.8	204.3	<b>44.0</b>
Sergipe	77.0	70.0	69.2	73.8	80.8	96.1	73.7	203.4	<b>68.9</b>
Tocantins	76.5	97.1	96.3	<b>69.0</b>	79.0	91.9	97.4	265.6	86.0

Table 47: 3-month ahead percent absolute errors in Brazil for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal
Amazonas	91.5	101.1	96.3	79.5	76.7	<b>67.3</b>	109.8	82.1	111.8
Antioquia	<b>40.9</b>	63.3	48.7	40.9	50.3	51.8	46.5	44.3	74.5
Arauca	84.0	109.4	81.4	54.2	73.7	<b>49.4</b>	90.7	93.7	127.3
Atlantico	98.7	97.8	74.9	63.3	<b>50.3</b>	96.6	70.3	188.7	85.5
Bogota	144.2	169.9	173.1	89.9	<b>63.3</b>	80.0	190.5	118.7	230.6
Bolivar	67.5	71.1	64.4	68.3	<b>60.8</b>	66.8	69.6	99.9	70.7
Boyaca	64.7	60.7	57.5	62.0	63.5	58.0	<b>57.2</b>	79.4	74.8
Caldas	49.1	64.0	51.9	<b>37.2</b>	40.3	39.9	44.7	57.9	60.7
Caqueta	69.7	80.7	64.0	46.0	73.3	74.6	<b>44.8</b>	114.6	72.8
Casanare	120.7	129.3	108.5	67.8	66.6	<b>62.6</b>	100.4	89.9	137.3
Cauca	53.6	70.3	68.0	58.8	59.9	<b>49.6</b>	70.8	79.3	64.6
Cesar	65.2	77.4	73.9	72.3	61.1	<b>57.7</b>	77.8	83.4	80.4
Choco	<b>54.4</b>	62.1	60.8	59.2	56.4	54.5	60.5	80.3	61.0
Cordoba	90.8	88.7	83.2	78.8	65.2	<b>62.7</b>	83.9	63.8	64.7
Cundinamarca	41.4	48.2	40.7	42.5	49.3	47.1	<b>36.7</b>	58.2	48.8
Guainia	104.7	108.3	100.5	82.6	<b>67.4</b>	105.4	102.7	602.8	94.5
Guajira	78.4	92.2	101.2	84.7	69.0	<b>66.2</b>	100.6	86.9	110.8
Guaviare	76.7	88.5	<b>54.0</b>	68.5	67.0	70.9	55.0	89.9	73.5
Huila	60.5	61.4	52.6	54.7	51.9	<b>51.8</b>	56.5	85.3	69.2
Magdalena	87.4	95.6	85.0	76.5	<b>59.3</b>	76.9	83.8	97.8	100.2
Meta	52.0	68.2	56.3	<b>42.6</b>	49.2	46.4	57.2	55.9	73.7
Naria	46.6	48.2	46.1	<b>38.5</b>	44.4	48.6	38.9	71.2	56.9
Norte Santander	43.2	51.5	50.8	43.3	<b>36.8</b>	37.8	51.4	54.9	63.5
Putumayo	60.9	72.1	46.4	<b>41.1</b>	44.2	57.1	48.7	75.3	57.2
Quindio	53.0	65.0	52.8	42.7	<b>31.7</b>	45.0	51.0	61.6	53.7
Risaralda	65.3	90.7	72.8	<b>56.4</b>	71.1	57.0	66.0	68.6	84.4
San Andres	90.6	94.2	95.2	<b>87.0</b>	87.9	130.1	96.2	1493.5	92.2
Santander	37.6	46.5	27.7	<b>26.5</b>	37.1	29.9	34.6	33.2	71.2
Sucre	85.5	73.2	<b>54.9</b>	65.9	68.4	62.8	59.1	92.5	66.9
Tolima	37.6	37.8	29.9	31.7	38.0	39.6	<b>23.4</b>	68.4	40.2
Valle	46.2	54.0	49.5	46.9	47.4	50.6	<b>46.1</b>	89.4	61.4
Vaupes	334.2	345.6	345.6	138.6	169.3	<b>125.0</b>	345.6	134.7	356.8
Vichada	122.0	108.0	108.6	<b>72.9</b>	83.7	78.6	108.6	153.2	106.4

Table 48: 3-month ahead percent absolute errors in Colombia for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal
Johor	45.4	45.9	46.3	41.3	<b>39.7</b>	45.0	46.1	70.7	51.9
Kedah	44.2	46.7	<b>41.7</b>	51.7	47.1	52.7	43.7	71.9	50.0
Kelantan	83.2	85.3	85.3	59.5	<b>55.4</b>	74.0	85.3	118.2	81.4
Kuala Lumpur and Putrajaya	46.9	47.5	43.7	45.7	<b>40.8</b>	42.6	43.6	68.9	57.9
Labuan	109.6	167.6	167.6	<b>85.5</b>	130.3	99.9	168.7	370.7	173.3
Malacca	-	-	-	-	51.7	<b>41.6</b>	-	-	55.9
Negeri Sembilan	36.6	42.2	41.5	36.2	36.4	<b>35.3</b>	39.6	51.1	44.7
Pahang	45.7	54.5	48.7	<b>44.5</b>	45.1	45.8	48.5	76.6	60.9
Perak	56.4	86.1	86.4	38.0	38.4	<b>35.1</b>	92.3	53.0	89.3
Perlis	83.2	107.6	107.6	76.8	72.4	<b>70.4</b>	107.6	165.0	112.1
Pulau Pinang	-	-	-	-	52.6	<b>50.0</b>	-	64.8	88.3
Sabah	41.9	43.2	40.9	44.1	48.7	48.3	<b>39.5</b>	113.7	49.6
Sarawak	52.1	65.7	64.7	42.3	46.8	<b>39.0</b>	63.9	61.3	81.1
Selangor	39.6	42.8	39.2	<b>37.0</b>	37.4	38.1	38.8	65.7	54.0
Terengganu	138.2	179.8	180.1	57.7	73.0	<b>56.9</b>	180.9	72.5	179.3

Table 49: 3-month ahead percent absolute errors in Malaysia for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal
Aguascalientes	184.3	186.7	186.7	105.8	<b>104.3</b>	188.2	186.7	212.2	153.9
Baja California Sur	2079.4	2000.1	1935.2	199.9	204.6	<b>161.7</b>	1827.1	2940.3	1944.7
Baja California	2165.9	2099.1	2099.1	296.6	284.9	<b>255.6</b>	2099.1	274.3	2029.3
Campeche	206.4	343.6	311.8	142.7	165.8	<b>104.1</b>	312.6	321.2	420.2
Chiapas	121.7	123.5	118.3	72.4	<b>68.9</b>	89.1	113.7	241.6	118.8
Chihuahua	168.3	173.0	173.0	129.1	<b>123.8</b>	215.0	173.0	26487.9	155.4
Coahuila	116.5	121.8	124.5	104.4	93.4	146.7	124.5	268.3	<b>77.0</b>
Colima	140.5	190.3	-	-	111.4	<b>107.9</b>	128.1	829.7	189.6
Durango	688.6	633.0	633.0	<b>241.1</b>	251.2	319.5	633.0	427.0	483.8
Guanajuato	942.3	983.1	983.1	<b>389.5</b>	624.0	546.7	983.1	7111.9	812.1
Guerrero	101.5	142.0	98.7	100.4	101.0	<b>94.2</b>	107.4	344.2	146.9
Hidalgo	109.3	116.5	116.5	115.1	105.7	147.6	116.5	1773.2	<b>101.3</b>
Jalisco	95.1	102.7	99.4	91.2	100.8	140.3	98.4	752.8	<b>85.6</b>
Mexico City	-	-	-	-	-	-	-	-	-
Mexico	155.8	154.9	154.9	<b>118.0</b>	123.2	156.9	154.9	576.4	142.0
Michoacan	80.6	108.1	103.0	97.3	86.1	97.8	94.1	639.8	<b>74.4</b>
Morelos	95.4	94.3	-	-	69.1	117.5	98.9	348.4	<b>61.7</b>
Nayarit	108.9	111.0	-	-	<b>78.1</b>	112.1	96.9	628.4	93.8
Nuevo Leon	181.7	182.1	192.6	<b>134.1</b>	140.3	188.6	200.7	5245.7	140.6
Oaxaca	102.4	115.1	96.3	73.6	<b>72.1</b>	116.2	88.0	1547.1	91.2
Puebla	101.5	109.1	109.1	114.1	82.5	144.4	109.1	690.3	<b>81.4</b>
Queretaro	214.6	121.2	122.7	159.6	145.8	141.6	122.7	386.5	<b>114.2</b>
Quintana Roo	106.9	132.2	-	-	108.7	<b>92.0</b>	103.8	138.8	134.7
San Luis Potosi	95.0	99.0	-	-	97.7	115.1	106.3	3112.7	<b>93.6</b>
Sinaloa	135.8	141.9	139.9	102.7	101.3	117.3	139.9	1113.9	<b>88.1</b>
Sonora	603.4	597.7	597.7	<b>154.5</b>	155.9	167.5	597.7	1867.8	535.1
Tabasco	109.8	161.1	159.6	94.0	120.7	<b>82.2</b>	159.6	490.1	237.4
Tamaulipas	145.1	160.9	156.3	<b>94.3</b>	101.2	139.7	155.6	1127.7	143.9
Tlaxcala	-	-	-	-	-	-	-	-	-
Veracruz	92.3	117.0	98.2	96.6	<b>91.3</b>	108.9	91.9	244.4	107.7
Yucatan	251.6	306.0	-	-	128.2	<b>124.4</b>	154.9	740.3	288.2
Zacatecas	208.8	207.6	207.6	<b>149.8</b>	186.4	196.4	207.6	2928.5	189.6

Table 50: 3-month ahead percent absolute errors in Mexico for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal
Iquitos	119.5	112.0	112.0	<b>69.7</b>	77.4	120.3	112.0	3230.7	81.4

Table 51: 3-month ahead percent absolute errors in Peru for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal
San Juan	73.2	71.8	71.8	<b>49.8</b>	71.8	76.8	71.8	87.8	59.9

Table 52: 3-month ahead percent absolute errors in Puerto Rico for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

location	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	Naive	NetModel	SIR	Seasonal
Amnat Charoen	117.9	121.3	152.6	<b>80.2</b>	<b>80.2</b>	107.1	145.0	434.9	100.9
Ang Thong	91.1	83.8	86.7	<b>65.7</b>	<b>65.7</b>	91.6	85.2	216.5	81.5
Bangkok	78.7	90.2	77.3	65.6	65.6	75.6	<b>63.5</b>	105.4	74.6
Bungkan	117.5	118.4	183.2	<b>79.2</b>	<b>79.2</b>	151.1	182.4	1532.5	88.7
Buri Ram	86.4	94.8	78.9	<b>65.3</b>	<b>65.3</b>	94.4	67.8	220.4	82.2
Chachoengsao	128.2	133.0	135.6	<b>56.4</b>	<b>56.4</b>	74.3	122.5	85.8	148.0
Chai Nat	81.6	73.5	<b>67.1</b>	77.3	77.3	103.8	67.8	254.5	72.3
Chaiyaphum	91.4	87.2	92.3	<b>74.7</b>	<b>74.7</b>	102.7	92.6	154.7	88.2
Chanthaburi	99.2	102.6	109.8	<b>56.8</b>	<b>56.8</b>	106.5	102.9	266.6	81.3
Chiang Mai	101.1	115.7	87.5	71.5	71.5	119.9	85.6	585.7	<b>68.8</b>
Chiang Rai	103.4	103.2	84.9	71.9	71.9	128.8	<b>67.8</b>	998.1	75.7
Chon Buri	59.8	62.8	61.5	<b>50.3</b>	<b>50.3</b>	65.3	56.7	108.9	65.0
Chumphon	69.0	77.8	73.0	<b>54.3</b>	<b>54.3</b>	65.0	67.7	79.6	74.3
Kalasin	77.4	89.4	85.8	<b>64.3</b>	<b>64.3</b>	101.9	79.0	241.8	72.7
Kamphaeng Phet	161.1	164.6	151.1	96.2	96.2	<b>95.8</b>	126.3	153.7	152.2
Kanchanaburi	99.1	100.7	87.3	<b>75.2</b>	<b>75.2</b>	85.5	85.4	242.2	93.3
Khon Kaen	79.5	87.7	75.4	84.5	84.5	87.8	<b>70.9</b>	176.9	85.6
Krabi	174.6	225.1	146.5	75.8	75.8	<b>65.4</b>	140.8	97.6	208.6
Lampang	115.5	125.4	120.3	<b>59.8</b>	<b>59.8</b>	133.8	110.9	384.8	69.9
Lamphun	152.5	161.7	148.3	<b>90.1</b>	<b>90.1</b>	112.9	129.0	711.3	136.0
Loei	95.8	104.7	107.5	<b>63.8</b>	<b>63.8</b>	121.9	105.9	289.3	79.5
Lop Buri	91.2	90.4	76.2	<b>60.8</b>	<b>60.8</b>	85.8	74.7	177.4	76.2
Mae Hong Son	80.3	90.6	91.3	68.7	68.7	133.4	86.1	841.6	<b>64.1</b>
Maha Sarakham	83.5	97.0	80.3	75.4	75.4	105.4	<b>66.4</b>	197.3	79.6
Mukdahan	93.1	109.4	107.9	<b>66.7</b>	<b>66.7</b>	126.5	119.6	353.0	79.9
Nakhon Nayok	144.1	143.9	148.9	<b>101.5</b>	<b>101.5</b>	112.6	150.0	192.6	140.2
Nakhon Pathom	45.1	52.8	43.5	47.9	47.9	63.5	<b>38.4</b>	62.8	52.5
Nakhon Phanom	104.4	106.4	135.6	<b>61.7</b>	<b>61.7</b>	138.4	134.0	894.3	71.5
Nakhon Ratchasima	87.9	82.6	76.1	74.3	74.3	94.0	<b>73.6</b>	234.0	82.4
Nakhon Sawan	76.6	80.6	83.4	<b>64.4</b>	<b>64.4</b>	75.2	75.9	433.3	75.2
Nakhon Si Thammarat	65.7	85.2	71.4	<b>46.6</b>	<b>46.6</b>	53.3	69.1	76.6	83.6
Nan	85.4	99.1	95.6	90.7	90.7	114.7	85.2	1047.5	<b>65.8</b>
Narathiwat	77.1	86.5	71.8	<b>63.3</b>	<b>63.3</b>	72.9	66.1	217.9	84.7
Nong Bua Lam Phu	99.6	104.3	81.8	<b>56.2</b>	<b>56.2</b>	110.9	97.7	275.3	78.8
Nong Khai	97.2	106.1	95.7	<b>70.7</b>	<b>70.7</b>	108.9	84.0	268.4	78.8
Nonthaburi	90.5	101.7	81.8	<b>70.0</b>	<b>70.0</b>	88.1	79.4	85.9	87.5
P.Nakhon S.Ayutthaya	77.0	83.3	79.3	<b>51.7</b>	<b>51.7</b>	77.1	74.8	119.1	77.2
Pathum Thani	94.3	104.6	102.4	75.4	75.4	81.6	95.6	82.3	122.5
Pattani	82.4	93.1	108.1	<b>49.1</b>	<b>49.1</b>	71.1	153.0	134.9	85.0
Phangnga	79.8	81.9	80.6	<b>45.3</b>	<b>45.3</b>	77.0	105.9	130.7	63.2
Phatthalung	106.9	132.5	105.8	<b>55.7</b>	<b>55.7</b>	74.3	103.2	159.1	125.5
Phayao	136.6	137.7	108.5	<b>65.7</b>	<b>65.7</b>	141.0	97.1	623.7	82.4
Phetchabun	94.7	106.2	107.3	<b>58.4</b>	<b>58.4</b>	117.7	103.1	358.0	75.5
Phetchaburi	77.7	86.3	103.0	54.4	54.4	<b>52.5</b>	108.3	59.4	93.3
Phichit	164.2	177.3	176.4	121.5	121.5	<b>96.9</b>	179.9	136.3	178.7
Phitsanulok	88.7	100.7	82.4	<b>58.9</b>	<b>58.9</b>	99.0	75.4	216.1	75.5
Phrae	211.8	210.8	-	<b>109.9</b>	<b>109.9</b>	147.8	171.3	1863.8	143.1
Phuket	83.7	102.4	69.8	<b>54.7</b>	<b>54.7</b>	56.1	80.4	94.8	99.0
Prachin Buri	85.7	93.4	76.3	72.9	72.9	97.0	<b>71.6</b>	184.2	77.3
Prachuap Khiri Khan	80.8	82.4	88.8	50.0	50.0	<b>48.1</b>	83.5	69.6	89.3
Ranong	62.8	64.4	63.4	52.0	52.0	84.7	63.9	152.4	<b>48.5</b>
Ratchaburi	57.2	67.2	65.0	<b>44.2</b>	<b>44.2</b>	51.5	68.5	56.6	66.7
Rayong	70.2	71.9	64.3	<b>50.1</b>	<b>50.1</b>	77.7	64.8	126.2	62.8
Roi Et	78.9	90.3	68.2	73.5	73.5	106.5	<b>63.8</b>	406.5	73.4
Sa Kaeo	86.0	96.1	80.5	<b>74.5</b>	<b>74.5</b>	100.9	75.9	153.5	84.5
Sakon Nakhon	103.1	110.0	116.4	<b>68.1</b>	<b>68.1</b>	132.5	115.7	528.4	74.6
Samut Prakan	78.8	81.2	74.1	<b>62.6</b>	<b>62.6</b>	65.4	72.9	101.9	90.8
Samut Sakhon	64.8	75.7	58.8	<b>49.2</b>	<b>49.2</b>	51.3	56.6	63.8	69.5
Samut Songkhram	114.8	141.4	104.2	<b>69.5</b>	<b>69.5</b>	82.7	96.5	100.3	135.4
Saraburi	73.7	82.5	62.1	60.3	60.3	87.8	<b>58.5</b>	154.6	65.3
Satun	151.7	229.9	169.4	<b>86.3</b>	<b>86.3</b>	89.0	164.8	213.1	209.7
Si Sa Ket	96.4	112.4	113.0	<b>69.7</b>	<b>69.7</b>	98.5	115.2	276.1	89.6
Sing Buri	116.1	93.9	97.2	120.9	120.9	124.9	97.1	977.2	<b>91.8</b>
Songkhla	78.6	89.6	84.3	<b>44.4</b>	<b>44.4</b>	67.8	97.0	116.9	84.7
Sukhothai	69.3	72.8	68.2	<b>57.8</b>	<b>57.8</b>	94.3	62.0	225.2	59.7
Suphan Buri	<b>46.0</b>	50.6	59.0	50.7	50.7	67.3	56.7	89.9	46.5
Surat Thani	156.1	193.7	160.6	85.1	85.1	<b>70.9</b>	153.4	115.2	190.0
Surin	75.8	89.9	61.2	67.0	67.0	103.5	<b>56.9</b>	333.1	63.6
Tak	69.8	81.7	69.1	52.1	52.1	109.2	65.3	397.5	<b>43.7</b>
Trang	87.7	95.5	95.5	<b>45.7</b>	<b>45.7</b>	88.1	95.5	214.0	68.9
Trat	92.5	99.8	105.2	<b>61.9</b>	<b>61.9</b>	86.2	94.9	175.9	86.0
Ubon Ratchathani	87.1	93.3	90.6	<b>79.0</b>	<b>79.0</b>	112.5	89.3	227.5	83.2
Udon Thani	99.8	97.1	99.5	<b>78.6</b>	<b>78.6</b>	127.2	97.5	2897.3	85.5
Uthai Thani	85.7	90.6	100.4	<b>75.8</b>	<b>75.8</b>	86.0	92.6	280.3	84.9
Uttaradit	70.2	73.4	70.1	51.4	51.4	104.4	68.0	295.2	<b>51.0</b>
Yala	70.9	80.1	73.5	<b>61.9</b>	<b>61.9</b>	80.1	76.0	142.0	79.1
Yasothon	88.5	102.3	96.7	<b>74.3</b>	<b>74.3</b>	104.8	89.1	202.9	82.4

Table 53: 3-month ahead percent absolute errors in Thailand for optimized models. Best performing models in each location are bolded. Lower values indicate stronger performance.

### 3.7 PAE of Standard Models versus Naive Persistence Baseline

country	no. of locations	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	NetModel	SIR	Seasonal
Brazil	27	16	5	7	<b>25</b>	21	7	14	2
Colombia	33	12	0	4	<b>18</b>	17	4	7	0
Malaysia	15	2	1	1	<b>8</b>	5	1	1	0
Mexico	32	6	1	1	<b>18</b>	16	2	3	2
Peru	1	0	0	0	<b>1</b>	0	0	0	0
Puerto Rico	1	<b>1</b>	0	0	<b>1</b>	<b>1</b>	0	<b>1</b>	0
Thailand	77	26	11	30	<b>62</b>	54	33	9	3
Overall	186	63	18	43	<b>133</b>	114	47	35	7

Table 54: Number of locations per country where standard models outperformed the naive persistence baseline at the 1-month ahead horizon, as measured through percent absolute error. Best performing models in each location are bolded. Higher values indicate stronger performance.

country	no. of locations	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	NetModel	SIR	Seasonal
Brazil	27	16	10	13	<b>22</b>	19	15	1	11
Colombia	33	6	2	8	15	<b>16</b>	10	4	1
Malaysia	15	2	2	3	<b>5</b>	4	3	0	0
Mexico	32	10	7	8	<b>22</b>	<b>22</b>	11	1	12
Peru	1	0	0	0	<b>1</b>	<b>1</b>	0	0	<b>1</b>
Puerto Rico	1	<b>1</b>	0	0	<b>1</b>	<b>1</b>	0	<b>1</b>	0
Thailand	77	36	20	41	<b>69</b>	65	44	4	27
Overall	186	71	41	73	<b>135</b>	128	83	11	52

Table 55: Number of locations per country where standard models outperformed the naive persistence baseline at the 2-month ahead horizon, as measured through percent absolute error. Best performing models in each location are bolded. Higher values indicate stronger performance.

country	no. of locations	AR	ARGO	ARGONet	Ensemble (Country)	Ensemble (Overall)	NetModel	SIR	Seasonal
Brazil	27	16	14	17	<b>20</b>	19	17	0	16
Colombia	33	9	3	15	<b>18</b>	15	13	1	4
Malaysia	15	3	2	2	<b>7</b>	6	2	0	1
Mexico	32	14	13	10	18	<b>20</b>	14	0	17
Peru	1	<b>1</b>	<b>1</b>	<b>1</b>	<b>1</b>	<b>1</b>	<b>1</b>	0	<b>1</b>
Puerto Rico	1	<b>1</b>	<b>1</b>	<b>1</b>	<b>1</b>	<b>1</b>	<b>1</b>	0	<b>1</b>
Thailand	77	46	40	43	<b>71</b>	<b>71</b>	47	2	52
Overall	186	90	74	89	<b>136</b>	133	95	3	92

Table 56: Number of locations per country where standard models outperformed the naive persistence baseline at the 3-month ahead horizon, as measured through percent absolute error. Best performing models in each location are bolded. Higher values indicate stronger performance.

## References

- [1] Dengue and Severe Dengue. *World Health Organization*, Oct 2019.
- [2] Dengue. *World Mosquito Program*, Apr 2022.
- [3] Dengue. *Centers for Disease Control and Prevention*, Feb 2023.
- [4] E. L. Aiken, A. T. Nguyen, C. Viboud, and M. Santillana. Toward the use of neural networks for influenza prediction at multiple spatial resolutions. *Science Advances*, 7(25):eabb1237, 2021.
- [5] A. Attanayake, S. Perera, and U. Liyanage. Exponential smoothing on forecasting Dengue cases in Colombo, Sri Lanka. *Journal of Science*, 11(1):11–22, 2020.
- [6] O. S. Baquero, L. M. R. Santana, and F. Chiaravalloti-Neto. Dengue forecasting in São Paulo city with generalized additive models, artificial neural networks and seasonal autoregressive integrated moving average models. *PloS One*, 13(4):e0195065, 2018.
- [7] R. S. Bivand, E. Pebesma, and V. Gomez-Rubio. *Applied Spatial Data Analysis with R, Second Edition*. Springer, NY, 2013.
- [8] A. L. Buczak, B. Baugher, L. J. Moniz, T. Bagley, S. M. Babin, and E. Guven. Ensemble method for Dengue prediction. *PloS One*, 13(1):e0189988, 2018.
- [9] K. M. Campbell, C. Lin, S. Iamsirithaworn, and T. W. Scott. The complex relationship between weather and Dengue virus transmission in Thailand. *The American journal of tropical medicine and hygiene*, 89(6):1066, 2013.
- [10] T. Chakraborty, S. Chattopadhyay, and I. Ghosh. Forecasting Dengue epidemics using a hybrid methodology. *Physica A: Statistical Mechanics and its Applications*, 527:121266, 2019.
- [11] Y. Chen, T. Liu, X. Yu, Q. Zeng, Z. Cai, H. Wu, Q. Zhang, J. Xiao, W. Ma, S. Pei, et al. An ensemble forecast system for tracking dynamics of Dengue outbreaks and its validation in China. *PLoS Computational Biology*, 18(6):e1010218, 2022.

- [12] F. J. Colón-González, L. S. Bastos, B. Hofmann, A. Hopkin, Q. Harpham, T. Crocker, R. Amato, I. Ferrario, F. Moschini, S. James, et al. Probabilistic seasonal Dengue forecasting in Vietnam using superensembles. *medRxiv*, pages 2020–05, 2020.
- [13] G. Fairchild, B. Tasseff, H. Khalsa, N. Generous, A. R. Daughton, N. Velappan, R. Priedhorsky, and A. Deshpande. Epidemiological data challenges: planning for a more robust future through data standards. *Frontiers in Public Health*, 6:336, 2018.
- [14] J. Friedman, R. Tibshirani, and T. Hastie. Regularization paths for generalized linear models via coordinate descent. *Journal of Statistical Software*, 33(1):1–22, 2010.
- [15] D. Gamerman, M. O. Prates, T. Paiva, and V. D. Mayrink. *Building a platform for data-driven pandemic prediction: from data modelling to visualisation - the CovidLP Project*. CRC Press, 2021.
- [16] R. T. Gluskin, M. A. Johansson, M. Santillana, and J. S. Brownstein. Evaluation of Internet-based Dengue query data: Google Dengue trends. *PLoS Neglected Tropical Diseases*, 8(2):e2713, 2014.
- [17] P. Guo, Q. Zhang, Y. Chen, J. Xiao, J. He, Y. Zhang, L. Wang, T. Liu, and W. Ma. An ensemble forecast model of Dengue in Guangzhou, China using climate and social media surveillance data. *Science of The Total Environment*, 647:752–762, 2019.
- [18] M. A. Johansson, K. M. Apfeldorf, S. Dobson, J. Devita, A. L. Buczak, B. Baugher, L. J. Moniz, T. Bagley, S. M. Babin, E. Guven, et al. An open challenge to advance probabilistic forecasting for Dengue epidemics. *Proceedings of the National Academy of Sciences*, 116(48):24268–24274, 2019.
- [19] M. A. Johansson, D. A. Cummings, and G. E. Glass. Multiyear climate variability and dengue — El Nino southern oscillation, weather, and Dengue incidence in Puerto Rico, Mexico, and Thailand: a longitudinal data analysis. *PLoS Medicine*, 6(11):e1000168, 2009.
- [20] M. A. Johansson, J. Hombach, and D. A. Cummings. Models of the impact of dengue vaccines: A review of current research and potential approaches. *Vaccine*, 29(35):5860–5868, 2011.



- [21] S. Kalayanarooj. Clinical manifestations and management of Dengue/DHF/DSS. *Tropical Medicine and Health*, 39(4SUPPLEMENT):S83–S87, 2011.
- [22] H. Kamarthi, A. Rodríguez, and B. A. Prakash. Back2future: Leveraging Backfill Dynamics for Improving Real-time Predictions in Future, 2022.
- [23] K. Kempfert, K. Martinez, A. Siraj, J. Conrad, G. Fairchild, A. Ziemann, N. Parikh, D. Osthus, N. Generous, S. D. Valle, and C. Manore. Time series methods and ensemble models to nowcast Dengue at the state level in Brazil, 2020.
- [24] N. Kerdprasop, K. Kerdorasop, and P. Chuaybamroong. A multi-criteria scheme to build model ensemble for Dengue infection case estimation. In *2020 International Conference on Decision Aid Sciences and Application (DASA)*, pages 214–218. IEEE, 2020.
- [25] W. O. Kermack and A. G. McKendrick. A contribution to the mathematical theory of epidemics. *Proceedings of the Royal Society of London. Series A, Containing Papers of a Mathematical and Physical Character*, 115(772):700–721, 1927.
- [26] M. V. Kiang, M. Santillana, J. T. Chen, J.-P. Onnela, N. Krieger, K. Engø-Monsen, N. Ekapi-rat, D. Areechokchai, P. Prempre, R. J. Maude, et al. Incorporating human mobility data improves forecasts of Dengue fever in Thailand. *Scientific Reports*, 11(1):1–12, 2021.
- [27] G. Koplewitz, F. Lu, L. Clemente, C. Buckee, and M. Santillana. Predicting Dengue incidence leveraging Internet-based data sources. a case study in 20 cities in Brazil. *PLoS Neglected Tropical Diseases*, 16(1):e0010071, 2022.
- [28] C. Kusiak. Real-time Dengue forecasting in Thailand: A comparison of penalized regression approaches using internet search data. 2018.
- [29] Z. Li, H. Gurgel, L. Xu, L. Yang, and J. Dong. Improving Dengue forecasts by using geospatial big data analysis in Google Earth engine and the historical Dengue information-aided long short term memory modeling. *Biology*, 11(2):169, 2022.

- [30] M. Löning, A. Bagnall, S. Ganesh, V. Kazakov, J. Lines, and F. J. Király. sktime: A Unified Interface for Machine Learning with Time Series. In *Workshop on Systems for ML at NeurIPS 2019*.
- [31] F. S. Lu, M. W. Hattab, C. L. Clemente, M. Biggerstaff, and M. Santillana. Improved state-level influenza nowcasting in the United States leveraging Internet-based data and network approaches. *Nature Communications*, 10(1):147, 2019.
- [32] A. Mahajan, N. Sharma, S. Aparicio-Obregon, H. Alyami, A. Alharbi, D. Anand, M. Sharma, and N. Goyal. A novel stacking-based deterministic ensemble model for infectious disease prediction. *Mathematics*, 10(10):1714, 2022.
- [33] C. A. Marques-Toledo, C. M. Degener, L. Vinhal, G. Coelho, W. Meira, C. T. Codeço, and M. M. Teixeira. Dengue prediction by the web: Tweets are a useful tool for estimating and forecasting Dengue at country and city level. *PLoS Neglected Tropical Diseases*, 11(7):e0005729, 2017.
- [34] S. M. Mathis, A. E. Webber, T. M. León, E. L. Murray, M. Sun, L. A. White, L. C. Brooks, A. Green, A. J. Hu, R. Rosenfeld, et al. Evaluation of flusight influenza forecasting in the 2021–22 and 2022–23 seasons with a new target laboratory-confirmed influenza hospitalizations. *Nature Communications*, 15(1):6289, 2024.
- [35] S. F. McGough, L. Clemente, J. N. Kutz, and M. Santillana. A dynamic, ensemble learning approach to forecast Dengue fever epidemic years in Brazil using weather and population susceptibility cycles. *Journal of the Royal Society Interface*, 18(179):20201006, 2021.
- [36] S. F. McGough, M. A. Johansson, M. Lipsitch, and N. A. Menzies. Nowcasting by Bayesian Smoothing: A flexible, generalizable model for real-time epidemic tracking. *PLoS computational biology*, 16(4):e1007735, 2020.
- [37] T. F. Menkir, H. Cox, C. Poirier, M. Saul, S. Jones-Weekes, C. Clementson, P. M. de Salazar, M. Santillana, and C. O. Buckee. A nowcasting framework for correcting for reporting delays in malaria surveillance. *PLOS Computational Biology*, 17(11):e1009570, 2021.

- [38] I. Morales, H. Salje, S. Saha, and E. S. Gurley. Seasonal distribution and climatic correlates of Dengue disease in Dhaka, Bangladesh. *The American Journal of Tropical Medicine and Hygiene*, 94(6):1359, 2016.
- [39] J. D. Murray. *Mathematical Biology: I. An Introduction*. Springer, 2002.
- [40] M. Newville, T. Stensitzki, D. B. Allen, and A. Ingargiola. LMFIT: Non-Linear Least-Square Minimization and Curve-Fitting for Python, Sept. 2014.
- [41] W. Nicholson, D. Matteson, and J. Bien. BigVAR: Tools for modeling sparse high-dimensional multivariate time series. *arXiv preprint arXiv:1702.07094*, 2017.
- [42] W. B. Nicholson, I. Wilms, J. Bien, and D. S. Matteson. High dimensional forecasting via interpretable vector autoregression, 2020.
- [43] R. J. Oidtman, E. Omodei, M. U. Kraemer, C. A. Castañeda-Orjuela, E. Cruz-Rivera, S. Misnaza-Castrillón, M. P. Cifuentes, L. E. Rincon, V. Cañon, P. d. Alarcon, et al. Trade-offs between individual and ensemble forecasts of an emerging infectious disease. *Nature Communications*, 12(1):5379, 2021.
- [44] Z. R. D. Omadlao, J. M. A. Cabrales, S. C. M. Cristobal, M. V. A. Dee, J. R. V. Tadeo, J. L. D. Marigmen, and R. R. Pajarillo. Machine learning-based Dengue forecasting system for Irisan, Baguio City, Philippines. In *AIP Conference Proceedings*, volume 2472, page 040019. AIP Publishing LLC, 2022.
- [45] D. Osthus, A. R. Daughton, and R. Priedhorsky. Even a good influenza forecasting model can benefit from internet-based nowcasts, but those benefits are limited. *PLoS computational biology*, 15(2):e1006599, 2019.
- [46] M. Othman, R. Indawati, A. A. Suleiman, M. B. Qomaruddin, and R. Sokkalingam. Model forecasting development for Dengue fever incidence in Surabaya City using time series analysis. *Processes*, 10(11):2454, 2022.
- [47] E. J. Pebesma and R. S. Bivand. Classes and methods for spatial data in R. *R News*, 5(2):9–13, November 2005.

- [48] F. Pedregosa, G. Varoquaux, A. Gramfort, V. Michel, B. Thirion, O. Grisel, M. Blondel, P. Prettenhofer, R. Weiss, V. Dubourg, J. Vanderplas, A. Passos, D. Cournapeau, M. Brucher, M. Perrot, and E. Duchesnay. Scikit-learn: Machine learning in Python. *Journal of Machine Learning Research*, 12:2825–2830, 2011.
- [49] B. Pfaff. VAR, SVAR and SVEC models: Implementation within R package vars. *Journal of Statistical Software*, 27(4), 2008.
- [50] P. Rangarajan, S. K. Mody, and M. Marathe. Forecasting dengue and influenza incidences using a sparse representation of Google trends, electronic health records, and time series data. *PLoS computational biology*, 15(11):e1007518, 2019.
- [51] R. C. Reiner Jr, T. A. Perkins, C. M. Barker, T. Niu, L. F. Chaves, A. M. Ellis, D. B. George, A. Le Menach, J. R. Pulliam, D. Bizzozzi, et al. A systematic review of mathematical models of mosquito-borne pathogen transmission: 1970–2010. *Journal of The Royal Society Interface*, 10(81):20120921, 2013.
- [52] M. Riaz, M. Hussain Sial, S. Sharif, Q. Mehmood, et al. Epidemiological forecasting models using ARIMA, SARIMA, and holt–winter multiplicative approach for Pakistan. *Journal of Environmental and Public Health*, 2023, 2023.
- [53] K. Shashvat, R. Basu, P. Bhondekar, and A. Kaur. An ensemble model for forecasting infectious diseases in India. *Trop Biomed*, 36:822–32, 2019.
- [54] K. Shea, R. K. Borchering, W. J. Probert, E. Howerton, T. L. Bogich, S.-L. Li, W. G. van Panhuis, C. Viboud, R. Aguás, A. A. Belov, et al. Multiple models for outbreak decision support in the face of uncertainty. *Proceedings of the National Academy of Sciences*, 120(18):e2207537120, 2023.
- [55] R. H. Shumway, D. S. Stoffer, R. H. Shumway, and D. S. Stoffer. ARIMA models. *Time Series Analysis and Its Applications: With R Examples*, pages 75–163, 2017.
- [56] C. Souza, P. Maia, L. M. Stolerma, V. Rolla, and L. Velho. Predicting Dengue outbreaks in Brazil with manifold learning on climate data. *Expert Systems with Applications*, 192:116324, 2022.

- [57] L. M. Stolerman, P. D. Maia, and J. N. Kutz. Forecasting Dengue fever in Brazil: An assessment of climate conditions. *PloS One*, 14(8):e0220106, 2019.
- [58] S. X. Tan and L. Chen. Real-time differential epidemic analysis and prediction for COVID-19 pandemic. *arXiv preprint arXiv:2004.06888*, 2020.
- [59] L. Thiruchelvam, S. C. Dass, V. S. Asirvadam, H. Daud, and B. S. Gill. Determine neighboring region spatial effect on Dengue cases using ensemble ARIMA models. *Scientific Reports*, 11(1):5873, 2021.
- [60] P. Virtanen, R. Gommers, T. E. Oliphant, M. Haberland, T. Reddy, D. Cournapeau, E. Burovski, P. Peterson, W. Weckesser, J. Bright, S. J. van der Walt, M. Brett, J. Wilson, K. J. Millman, N. Mayorov, A. R. J. Nelson, E. Jones, R. Kern, E. Larson, C. J. Carey, Í. Polat, Y. Feng, E. W. Moore, J. VanderPlas, D. Laxalde, J. Perktold, R. Cimrman, I. Henriksen, E. A. Quintero, C. R. Harris, A. M. Archibald, A. H. Ribeiro, F. Pedregosa, P. van Mulbregt, and SciPy 1.0 Contributors. SciPy 1.0: Fundamental Algorithms for Scientific Computing in Python. *Nature Methods*, 17:261–272, 2020.
- [61] S. Wongkoon, M. Jaroensutasinee, and K. Jaroensutasinee. Distribution, seasonal variation & Dengue transmission prediction in Sisaket, Thailand. *The Indian Journal of Medical Research*, 138(3):347, 2013.
- [62] S. Yang, S. C. Kou, F. Lu, J. S. Brownstein, N. Brooke, and M. Santillana. Advances in using Internet searches to track Dengue. *PLoS Computational Biology*, 13(7):e1005607, 2017.
- [63] S. Yang, M. Santillana, and S. C. Kou. Accurate estimation of influenza epidemics using Google search data via ARGO. *Proceedings of the National Academy of Sciences*, 112(47):14473–14478, 2015.
- [64] C. Yi, L. W. Cohnstaedt, and C. M. Scoglio. SEIR-SEI-EnKF: A new model for estimating and forecasting Dengue outbreak dynamics. *IEEE Access*, 9:156758–156767, 2021.
- [65] N. Zhao, K. Charland, M. Carabali, E. O. Nsoesie, M. Maheu-Giroux, E. Rees, M. Yuan, C. Garcia Balaguera, G. Jaramillo Ramirez, and K. Zinszer. Machine learning and Dengue

forecasting: Comparing random forests and artificial neural networks for predicting Dengue burden at national and sub-national scales in Colombia. *PLOS Neglected Tropical Diseases*, 14(9):e0008056, 2020.