

Supplementary Materials

Materials and Methods

Data Sources

Data on the confirmed, new and death cases of Covid-19 from January 20, 2020 to March 8 were from WHO (<https://www.who.int/emergencies/diseases/novel-coronavirus-2019/situation-reports>). Data included the total numbers of the accumulated, new confirmed and death cases in the world and across 102 countries. The data were organized in a matrix with the rows representing the whole world and countries and columns representing the number of the new confirmed cases of each day. The confirmed cases of each country were a time series. Let t_{ij} be the number of the confirmed cases of the j^{th} day within the i^{th} country. Let Z be a $I \times m$ dimensional matrix. The element Z_{ij} is the number of the confirmed new cases of Covid-19 on the j^{th} day, starting with January 20, 2020 in the i^{th} country.

Modified Auto-encoder for Modeling Time Series

Modified auto-encoders (MSAE) (1,2) were used to forecast the number of the accumulative and new confirmed cases of Covid-19. Unlike the classical auto-encoder where the number of nodes in the layers usually decreases from the input layer to the latent layers, the numbers of the nodes in the input, the first latent layer, the second latent layer and output layers in the MSAE were 8, 32, 4 and 1, respectively (Figure 1). We view a segment of time series with 8 days as a sample of data and take 128 segments of time series as the training samples. One element from the data matrix Z is randomly selected as a start day of the segment and select its 7 successive days as the other days to form a segment of time series. Let i be the index of the segment and j_i be the column index of the matrix Z that was selected as the starting day. The i^{th} segment time series

can be represented as $\{Z_{j_i}, Z_{j_i+1}, \dots, Z_{j_i+7}\}$. Data were normalized to $X_{j_i+k} = \frac{Z_{j_i+k}}{S}$, $k = 0, 1, \dots, 7$, where $S = \frac{1}{8} \sum_{k=0}^7 Z_{j_i+k}$. Let $Y_i = \frac{Z_{j_i+8}}{S}$ be the normalized number of cases to forecast. If $S = 0$, then set $Y_i = 0$. The loss function was defined as

$$L = \sum_{i=1}^{128} W_i (Y_i - \hat{Y}_i)^2,$$

where Y_i was the observed number of the cases in the forecasting day of the i^{th} segment time series and \hat{Y}_i was its forecasted number of cases by the MSAE, and W_i were weights. If j_i was in the interval $[1, 12]$, then $W_i = 1$. If j_i was in the interval $[13, 24]$, then $W_i = 2$, etc. The back propagation algorithm was used to estimate the weights and bias in the MSAE. Repeat training processes 5 times. The average forecasting $\hat{Y}_i, i = 1, \dots, 34$ will be taken as a final forecasted number of the accumulated confirmed cases for each province/city.

Forecasting Procedures

The trained MSAE was used for forecasting the future number of the confirmed cases of Covid-19 for each province/city. Consider the i^{th} province/city. Assume that the number of new confirmed cases of Covid-19 on the j^{th} day that needs to be forecasted is x_{ij} . Let H be a 34×8 dimensional matrix and $h_{il} = x_{ij-9+l}, i = 1, \dots, 34$, and $l = 1, \dots, 8$. Let $g_i = \frac{1}{8} \sum_{l=1}^8 h_{il}, i = 1, \dots, 34$ be the average of the i^{th} row of the matrix H . Let U be the normalized matrix of H where $u_{il} = \frac{h_{il}}{g_i}, i = 1, \dots, 34$, and $l = 1, \dots, 8$. The output of the MSAE is the forecasted number of the new confirmed cases and is denoted as $\hat{v}_i = f(u_{i1}, \dots, u_{i8}, \theta), i = 1, \dots, 34$, where θ represented the estimated parameters in the trained MSAE. The one-step forecasting of the number of the new confirmed cases of Covid-19 for each city is given by $\hat{Y}_i = \hat{v}_i g_i, i = 1, \dots, 34$.

The recursive multiple-step forecasting involved using a one-step model multiple times where the prediction for the preceding time step was used as an input for making a prediction on the following time step. For example, for forecasting the number of the new confirmed cases for the one more next day, the predicted number of new cases in one-step forecasting would be used as an observational input in order to predict day 2. Repeat the above process to obtain the two-step forecasting. The summation of the final forecasted number of the new confirmed cases for each province/city was taken as the prediction of the total number of the new confirmed cases of Covid-19 in China.

Fig. S1 Architecture of modified autoencoder.

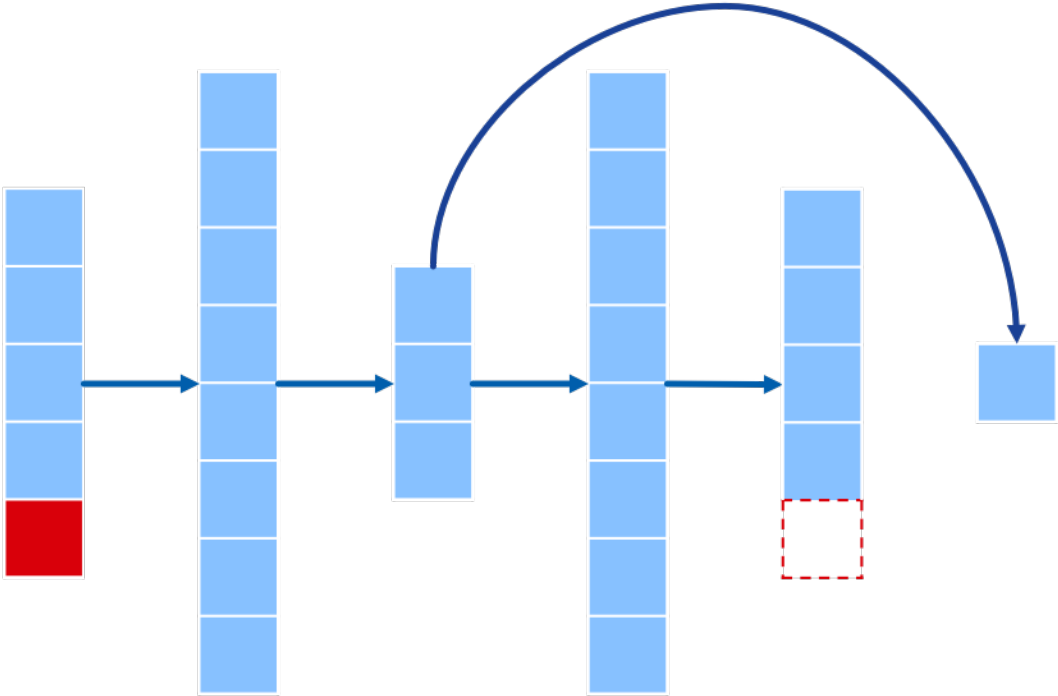


Fig. S2 Forecasted duration, cumulative cases of outbreak end and risk of top 44 outbreak countries in the world.

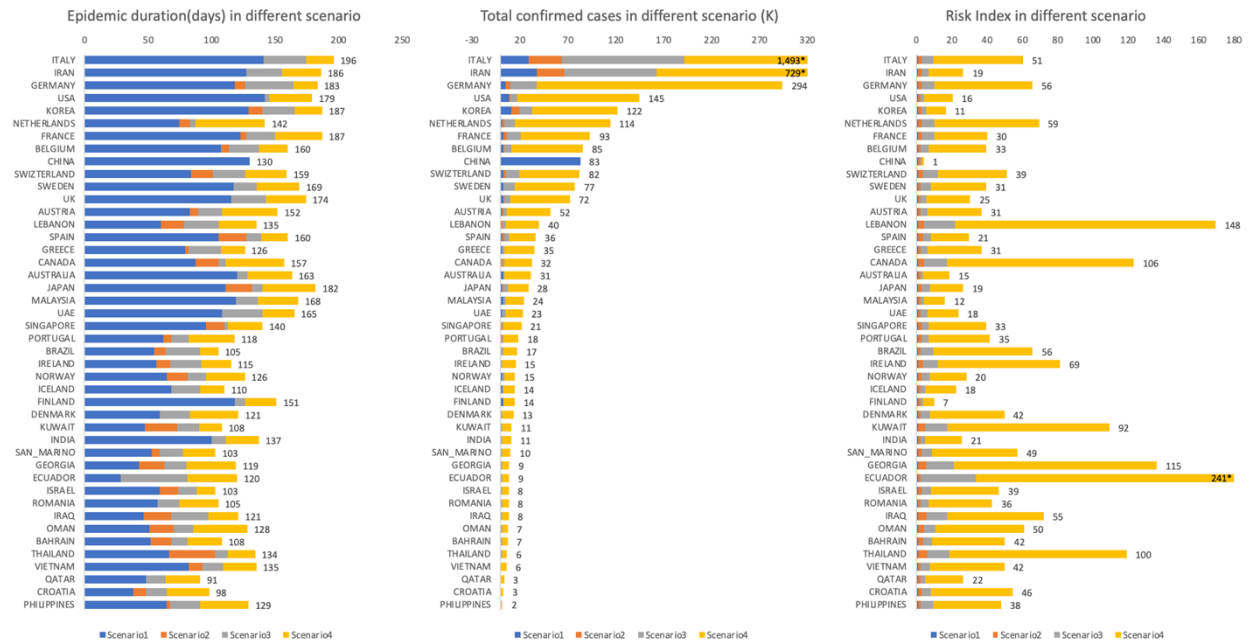


Fig. S3 Time-case plot of the top seven infected countries: China, Iran, Italy, Germany, South Korea, USA, France and all other countries. (A) Time-case plot under intervention scenario 1; (B) Time-case plot under intervention scenario 2; (C) Time-case plot under intervention scenario 3 and (D) Time-case plot under intervention scenario 4.

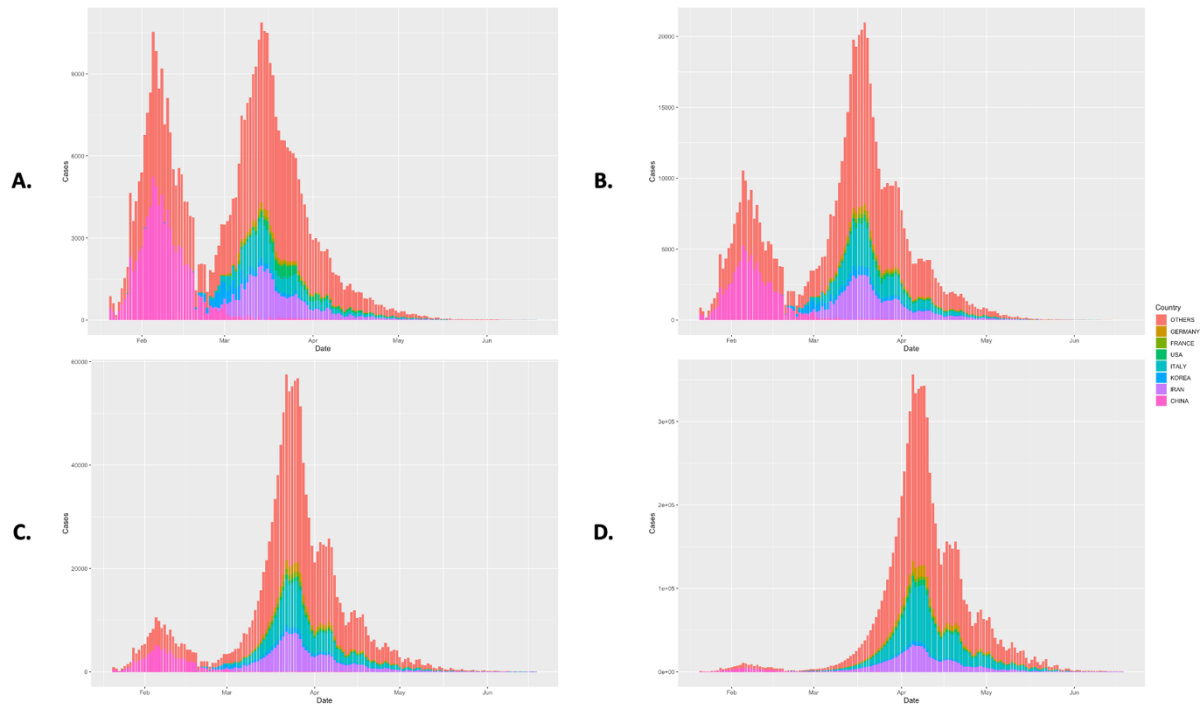


Fig. S4 Case-fatality curve for the world.

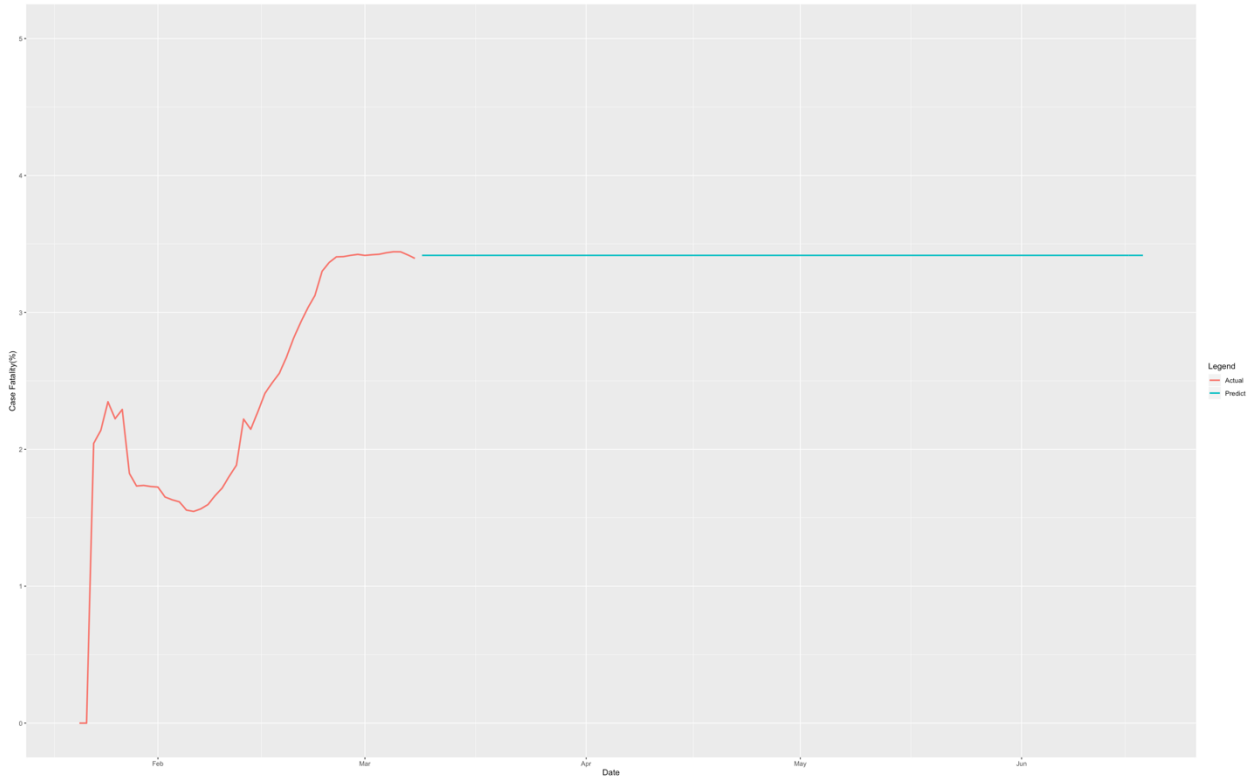


Table S1. One- to five-step forecasting errors.

	Reported	Forecasted	1-step error	2-step error	3-step error	4-step error	5-step error
Global							
3/1/2020	93,090	93,245	0.17%				
3/2/2020	95,333	95,584	0.26%	0.91%			
3/3/2020	98,192	98,381	0.19%	0.03%	1.18%		
3/4/2020	101,927	101,234	-0.68%	-0.51%	-0.68%	0.41%	
3/5/2020	105,587	105,798	0.20%	0.32%	0.23%	-0.32%	1.30%
Absolute Average Error			0.30%	0.45%	0.70%	0.37%	1.30%
China							
3/1/2020	80,422	80,378	-0.05%				
3/2/2020	80,565	80,508	-0.07%	-0.01%			
3/3/2020	80,711	80,621	-0.11%	-0.17%	-0.02%		
3/4/2020	80,813	80,713	-0.12%	-0.21%	-0.18%	0.07%	
3/5/2020	80,859	80,756	-0.13%	-0.17%	-0.20%	-0.15%	0.20%
Absolute Average Error			0.10%	0.14%	0.13%	0.11%	0.20%
Other countries							
3/1/2020	12,668	12,866	1.56%				
3/2/2020	14,768	15,076	2.09%	5.92%			
3/3/2020	17,481	17,760	1.59%	0.96%	6.70%		
3/4/2020	21,114	20,521	-2.81%	-1.69%	-2.60%	1.70%	
3/5/2020	24,728	25,042	1.27%	1.95%	1.63%	-0.87%	4.90%
Absolute Average Error			1.86%	2.63%	3.64%	1.28%	4.90%

Table S2. Spread of COVID-19 in 30 countries and whole world under delayed active intervention.

State	Peak Time	End Time	Duration	Peak (Cum)	Peak (New)	Curr Case	End Case	Up Slop	Down Slop
Total	2020/3/19	2020/6/25	157	193,016	10,488	105,587	310,112	164.38	-94.53
China	2020/2/5	2020/5/19	130	31,432	5,236	80,859	82,740	NA	0.00
Iran	2020/3/19	2020/6/25	127	33,102	3,169	5,823	66,566	113.69	-29.00
Italy	2020/3/19	2020/6/19	141	32,734	3,228	5,883	64,096	62.41	-29.93
Korea	2020/2/29	2020/6/8	140	3,150	813	7,134	19,361	10.93	-7.20
Germany	2020/3/20	2020/6/1	126	5,182	530	795	10,331	9.22	-5.79
USA	2020/3/21	2020/6/12	142	3,649	491	213	9,550	6.67	-4.06
France	2020/3/18	2020/5/30	127	3,195	324	706	6,580	5.98	-4.12
Switzerland	2020/3/21	2020/6/5	101	2,641	271	264	5,381	9.70	-2.37
Spain	2020/3/16	2020/6/6	127	1,703	216	430	4,012	4.78	-2.59
Belgium	2020/3/19	2020/5/28	114	1,798	197	169	3,725	4.24	-2.35
UK	2020/3/19	2020/5/25	115	1,694	187	210	3,496	3.62	-2.32
Netherlands	2020/3/18	2020/5/20	83	1,456	169	188	3,351	8.83	-2.41
Japan	2020/3/18	2020/5/31	132	1,511	137	455	2,976	2.34	-1.70
Austria	2020/3/20	2020/5/24	89	1,242	129	104	2,507	5.70	-1.64
Sweden	2020/3/23	2020/5/27	117	1,280	124	161	2,467	1.56	-0.96
Finland	2020/3/29	2020/5/26	118	1,032	108	19	2,172	0.72	-0.47
Australia	2020/3/22	2020/5/23	120	896	109	74	2,115	1.23	-0.96
Malaysia	2020/3/21	2020/5/23	119	1,009	109	93	2,031	1.49	-1.13
Greece	2020/3/25	2020/5/18	82	824	83	66	1,635	1.74	-0.52
UAE	2020/3/20	2020/5/15	108	735	92	45	1,611	1.42	-1.18
Norway	2020/3/15	2020/5/17	81	536	78	147	1,538	3.74	-1.13
Singapore	2020/3/16	2020/5/12	110	400	51	138	1,062	0.94	-0.86
Canada	2020/3/22	2020/5/10	105	525	50	57	1,000	0.80	-0.71
Portugal	2020/3/20	2020/5/9	68	412	52	21	915	2.93	-0.76
Lebanon	2020/3/16	2020/5/9	78	258	47	28	887	1.92	-0.84
Iceland	2020/3/23	2020/5/8	68	398	43	45	805	2.07	-0.59
Iraq	2020/3/20	2020/5/2	68	330	36	54	657	1.33	-0.58
Ireland	2020/3/21	2020/5/6	67	277	33	19	578	1.44	-0.44
India	2020/3/23	2020/5/8	100	246	26	34	533	0.26	-0.24
Kuwait	2020/2/27	2020/5/6	73	43	31	62	496	0.68	-0.33

Table S3. Spread of COVID-19 in 30 countries and whole world under further delayed active intervention.

State	Peak Time	End Time	Duration	Peak (Cum)	Peak (New)	Curr Case	End Case	Up Slop	Down Slop
Total	2020/3/22	2020/7/22	184	294,764	28,754	105,587	696,503	423.52	-222.28
Italy	2020/3/26	2020/7/17	169	97,631	9,170	5,883	190,731	159.06	-72.06
Iran	2020/3/22	2020/7/22	154	58,803	7,688	5,823	162,399	219.06	-59.26
China	2020/2/5	2020/5/19	130	31,432	5,236	80,859	82,740	NA	0.00
Germany	2020/3/26	2020/7/9	164	18,529	1,845	795	37,244	29.23	-15.02
Korea	2020/3/22	2020/7/3	165	17,021	1,285	7,134	32,502	18.29	-11.18
Finance	2020/3/25	2020/6/22	150	10,633	1,006	706	21,099	16.36	-10.51
Switzerland	2020/3/25	2020/6/30	126	8,811	916	264	18,797	31.63	-8.54
USA	2020/3/26	2020/6/13	143	8,604	898	213	17,551	13.48	-9.90
Sweden	2020/3/26	2020/6/14	135	7,390	731	161	15,127	13.02	-8.06
Netherlands	2020/3/26	2020/5/24	87	7,124	685	188	14,016	25.64	-10.17
Belgium	2020/3/26	2020/6/20	137	5,659	533	169	11,153	10.52	-5.61
UK	2020/3/22	2020/6/17	138	3,233	465	210	9,930	8.56	-5.13
Spain	2020/3/22	2020/6/18	139	3,564	388	430	8,512	7.15	-4.23
Japan	2020/3/22	2020/6/8	140	2,711	311	455	6,830	4.71	-3.81
Austria	2020/3/26	2020/6/12	108	3,379	321	104	6,626	10.70	-3.54
Malaysia	2020/3/22	2020/6/9	136	1,718	253	93	5,196	3.98	-2.95
Lebanon	2020/3/26	2020/6/5	105	2,375	239	28	4,771	7.00	-2.89
UAE	2020/3/22	2020/6/14	138	1,456	229	45	4,605	3.82	-2.54
Greece	2020/3/25	2020/6/12	107	1,882	215	66	4,278	7.15	-2.27
Australia	2020/3/26	2020/5/31	128	1,935	195	74	3,949	3.02	-2.57
Canada	2020/3/26	2020/5/16	111	1,941	199	57	3,879	3.14	-3.25
Norway	2020/3/22	2020/5/31	95	1,407	162	147	3,402	5.92	-2.20
Singapore	2020/3/26	2020/5/15	113	1,473	132	138	2,778	2.03	-2.26
Finland	2020/3/30	2020/6/3	126	1,362	138	19	2,731	1.81	-1.34
Portugal	2020/3/26	2020/5/23	82	1,129	115	21	2,276	4.81	-1.65
Brazil	2020/3/26	2020/5/27	91	1,083	110	19	2,206	4.04	-1.59
Iceland	2020/3/26	2020/5/31	91	868	100	45	2,066	3.64	-1.16
Ireland	2020/3/26	2020/5/31	92	918	98	19	1,876	3.61	-1.19
Iraq	2020/3/22	2020/5/31	97	587	83	54	1,754	2.86	-1.14
Denmark	2020/3/26	2020/5/19	83	808	80	31	1,579	2.69	-1.21

References

13. Charte D, Charte F, García S, Jesus MJD, Herrera F. A practical tutorial on autoencoders for nonlinear feature fusion: Taxonomy, models, software and guidelines. *Information Fusion*;44:78–96. (2018)
14. Yuan X, Huang B, Wang Y, Yang C, Gui W. Deep Learning-based feature representation and its application for soft sensor modeling with variable-wise weighted SAE. *IEEE Trans on Industrial informatics*, 14(7): 3235-3243. (2018)
15. K. Weiss, T.M. Khoshgoftaar, and D. Wang, “A survey of transfer learning,” *J. Big Data*, vol. 3, no. 1, Dec. (2016)
16. F. Zhuang, Z. Qi, K. Duan, D. Xi, Y. Zhu, H. Zhu, H. Xiong, Q. He. *A Comprehensive Survey on Transfer Learning* (2019). arXiv:1911.02685